



# HOSHIZAKI

## 2022 PRICE GUIDE

EFFECTIVE: July 1, 2022 | REVISED: July 14, 2022

# ICE EQUIPMENT

# REFRIGERATION

<b>ICE MACHINE MODEL CODE &amp; USAGE GUIDE</b>	3	<b>STEELHEART FEATURES &amp; BENEFITS</b>	42
<b>TYPES OF ICE</b>	4	<b>REFRIGERATION MODEL CODE</b>	43
<b>CUBER SERIES</b>	5	<b>STEELHEART SERIES</b>	44
Undercounter Cubers with Built-In Bins	6-7	Upright Refrigerators & Freezers	45-48
KMEdge X Crescent Cubers	8-9	Dual Temps	48
KMEdge Crescent Cubers	10-14	Pass Thrus	49-50
KMEdge Crescent Cubers for Dispensers	14-15	Roll Ins	51
KMEdge Low Profile Crescent Cubers	16	Roll Thrus	52
KMEdge Crescent Cubers - Serenity Series	17-18	Compact Undercounter Refrigerator	53
IM Square Cubers (Specialty Ice)	19-20	Undercounter Refrigerators & Freezers	54-56
<b>FLAKER / CUBELET SERIES</b>	21	Undercounter Refrigerators & Freezers with Drawers	57-58
Undercounter Flakers with Built-In Bins	21-22	Worktop Refrigerators & Freezers	59-60
Flakers	22-23	Worktop Refrigerators & Freezers with Drawers	61-62
Undercounter Cubelet with Built-In Bins	24	Drawer / Door Combination Refrigerators	63
Cubelet Ice Machines	24-26	Prep Tables - Sandwich Top Refrigerators	64-65
Cubelets - Serenity Series	27	Prep Tables - Sandwich Top Refrigerators with Drawers	66
<b>DISPENSER SERIES</b>	28	Prep Tables - Mega Top Refrigerators	67-68
DCM Series	28-29	Prep Tables - Mega Top Refrigerators with Drawers	69-70
DB/DKM Hotel/Motel Dispensers	31	Prep Tables - Pizza Refrigerators	71
DM/DWM Dispensers	32	Prep Tables - Pizza Refrigerators with Drawers	72
<b>ICE STORAGE BINS</b>	33-34	Prep Tables - Pizza Refrigerators Drawer / Door Combos	73
<b>DISPENSER STANDS</b>	35	Refrigerated Equipment Stands	74
<b>TOP KIT MATRIX</b>	36	<b>SUSHI CASES</b>	75
<b>REMOTE CONDENSERS &amp; MATRIX</b>	37-39	<b>GLASS DOOR MERCHANDISERS</b>	76
<b>WATER FILTRATION</b>	40	<b>BACK BAR REFRIGERATION</b>	77-80
<b>OZONE DEVICE &amp; REMOTE MONITORING</b>	41	<b>ECONOMY SERIES</b>	81-83
		<b>REFRIGERATION ACCESSORIES</b>	85-89

## HOSHIZAKI. BEYOND STRONG.

It's the promise of reliability... and the peace of mind that comes with it. It's performing beyond expectations...with relentless durability and sustainability. It's knowing that we've already thought about your future and can endure at the next level.



## HEADQUARTERS FOR THE AMERICAS

**HOSHIZAKI AMERICA, INC.**, with corporate headquarters in Peachtree City, Georgia, and a second manufacturing facility in Griffin, Georgia, operates some of the most automated production facilities in the industry. Certified as Georgia Made, HOSHIZAKI is proud to inform domestic and international consumers that many of their products have received the certification confirming they are manufactured in the state of Georgia. Using state-of-the-art technology, every HOSHIZAKI unit is run-tested at each factory, and undergoes rigorous quality performance tests. HOSHIZAKI offers advanced training seminars at our headquarters and basic training programs across the country for both service representatives and customers.



## DID YOU KNOW?

- **HOSHIZAKI** is the world's largest manufacturer of commercial ice equipment, employing over 13,180 people.
- **HOSHIZAKI** is the world's largest manufacturer of commercial refrigerated food service equipment with sales of over \$2.5 billion serving customers in 60 nations.
- **HOSHIZAKI** operates plants worldwide including two in the USA, three in Japan, one each in England and China.
- In expansion to a full-service kitchen equipment company, **HOSHIZAKI** acquired Lancer Corporation in 2006, GRAM Commercial A/S in 2008, and both Jackson and Macom in 2013.
- **HOSHIZAKI** is certified in ISO-9001 and ISO-14001  
- being the first and only food service equipment manufacturer to achieve ISO-14001.
- **HOSHIZAKI** was awarded "Partner Of The Year - Sustained Excellence" by ENERGY STAR®.





# WARRANTY

**EFFECTIVE: July 1, 2022**

Supersedes all previous price lists

## TERMS and CONDITIONS

Prices are F.O.B. Factory. All prices and specifications are subject to change without notice. HOSHIZAKI reserves the right to determine point of shipment.

**TERMS:** Terms are such as the Company may extend to the purchaser.

**LOST OR DAMAGED SHIPMENTS:** Whenever seller shall deliver or cause to be delivered to a common carrier any goods ordered by consignee, whether the particular common carrier shall have been designated in the shipping instructions of the consignee or not, seller shall not be responsible for any delays or damage in shipment and the common carrier to which seller shall deliver goods shipped to the consignee is hereby declared to the agent of the consignee. Therefore, it is the responsibility of the consignee to file claim with the carrier for lost or damaged shipments.

## WARRANTY

All units to be free from manufacturing defects, covered by:

### **KMEdge Series Cubers, DKM Ice Machine & Dispenser and DB/DM Hotel/Motel Dispensers**

3-Year - Parts & Labor on entire machine & DB/DM Dispenser

5-Year - Parts & Labor on Evaporator, Parts on Compressor, Air-Cooled Condenser Coil

### **AM-50 Series Cubers & C-80 Flakers**

2-Year - Parts & Labor on Entire Machine

### **DWM MODwater Water Dispensers**

3-Year - Parts & Labor on Entire Machine

### **IM Series Cubers (Specialty Ice)**

3-Year - Parts & Labor on Entire Machine

5-Year - Parts on Compressor and Air-Cooled Condenser Coil

### **Flakers and Cubelet Ice Machines, DCM Ice & Water Dispensers**

3-Year - Parts & Labor on Entire Machine

5-Year - Parts on Compressor and Air-Cooled Condenser Coil

### **Bins & Water Dispensers**

3-Year - Parts & Labor on Slope Front Bins

5-Year - Parts & Labor on Large Upright Bin Models

### **Countertop Refrigerated Display Cases**

1-Year - Parts & Labor on Entire Machine

2-Year - Parts & Labor on Compressor, Evaporator, Air-Cooled Condenser

5-Year - Parts on Compressor, Air-Cooled Condenser

### **Accessories**

90 Day - Parts only

1-Year - HS-5061 Drain Pump (Beckett Brand) - Parts & Labor

1-Year - Water Filter System & Replaceable Elements

### **Warranty**

Warranty valid in United States, Canada, Puerto Rico, & U.S. Territories only. Contact factory for warranty in other countries. Refer to manufacturer's full warranty for complete details. Suggested list prices are intended only as a guide. This does not restrict the price seller may establish due to market conditions.

## AGENCY LISTINGS and MARKS



Intertek



Intertek



Intertek




CANADIAN ENERGY PERFORMANCE VERIFIED  
RENDEMENT ENERGETIQUE VERIFIE





# ICE MACHINE MODEL NUMBER IDENTIFICATION CODE

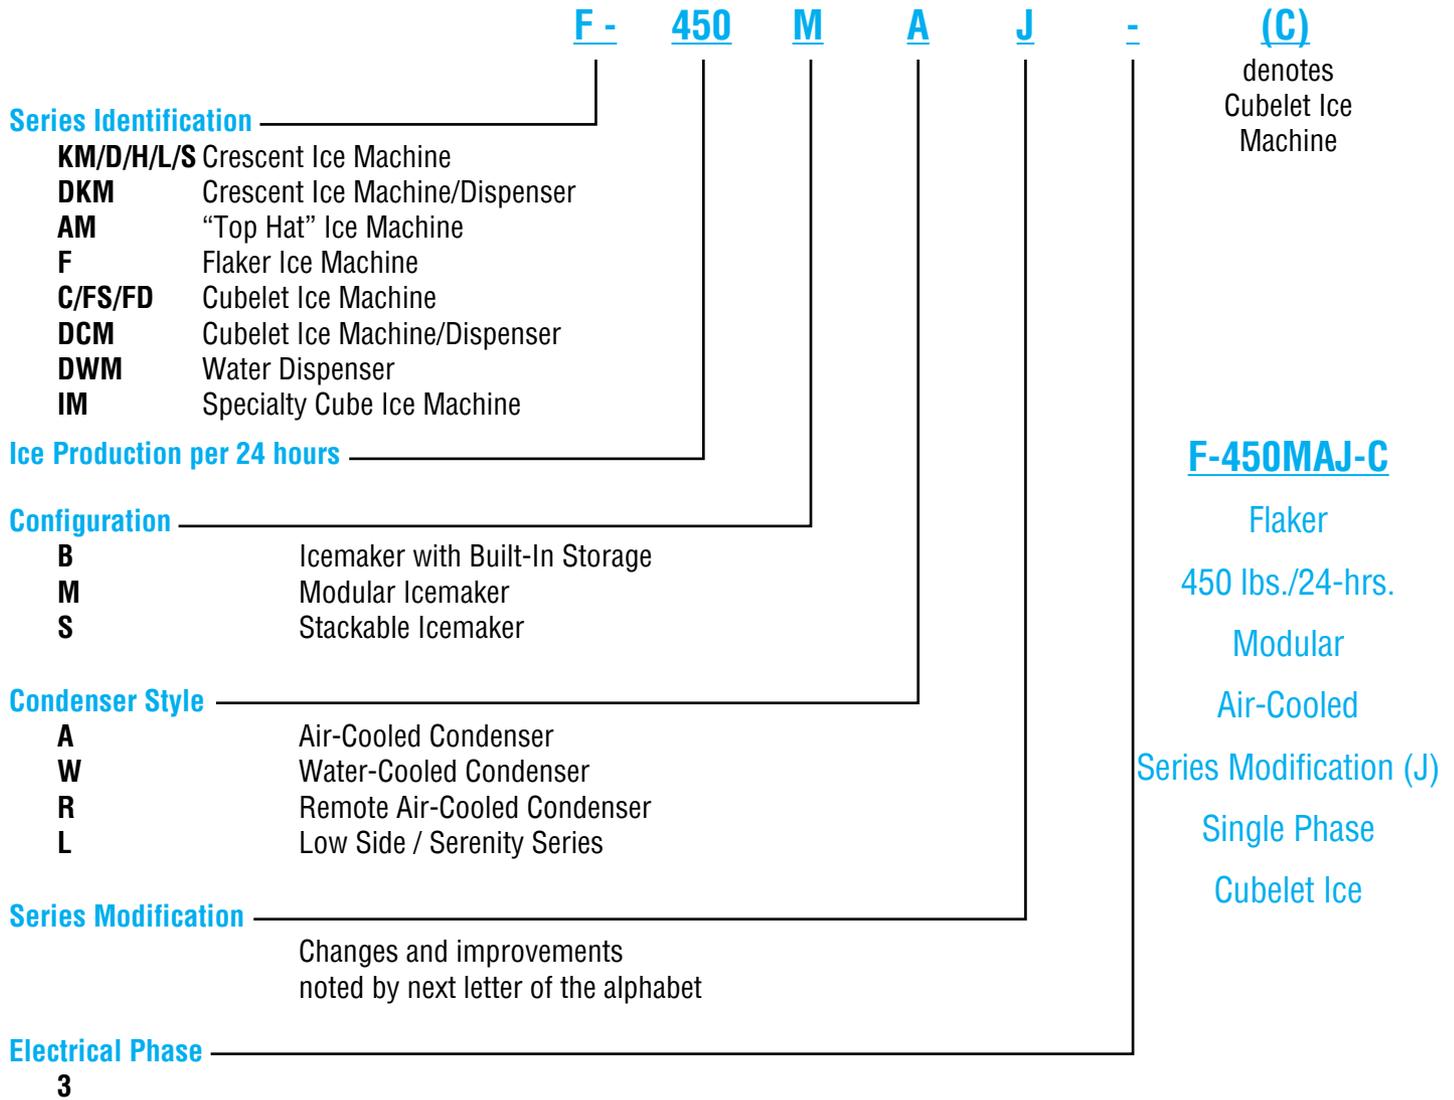

## CHOOSING THE RIGHT ICE MAKER



## HOW MUCH ICE DO YOU NEED?

Before choosing an ice maker, take a look at how many customers you serve and what type of ice you will need



**Restaurants**  
use an average of **2 lbs.** of ice per customer per day

**Schools and university cafeterias** average about **1.5 lbs.** of ice per student per day



**Hospital cafeterias** use about **1 lbs.** of ice per person per day and an average of **10 lbs.** for every bed

**Bars and cocktail lounges** use about **3 lbs.** of ice per seat



**Hotels** use about **5 lbs.** of ice per room per day

$$\frac{\text{Pounds of ice used} \times \text{Number of customers served}}{\text{=}} \text{The size of ice maker you need}$$

Your menu should dictate your machine —not the other way around




# TYPES OF ICE



**Crescent Cube** - Individual, hard, clear, crescent shape

Ice Equipment:


- KM KMD
- KML KMS
- KMH DKM models



**“Top Hat” Cube** - Individual, hard, clear, round shape

Ice Equipment:


- AM models



**Cubelet** - Chewable, soft, light, small nugget shape

Ice Equipment:


- C FS-C
- FD-C DCM models
- F-C

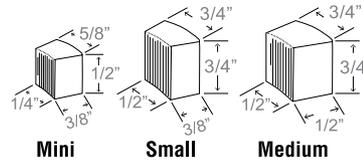

**Flaked** - Soft, light, chewable, various shapes

Ice Equipment:

- F models




## SPECIALTY ICE

Ice Equipment: IM models




### Sphere

1.8” in diameter, clear and solid



### Square Cube


Individual, hard, clear, square shape

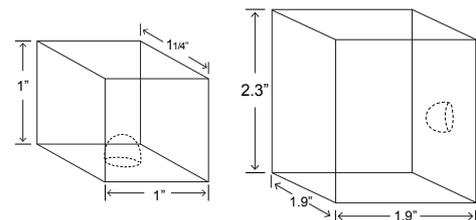



# CUBER SERIES


## Features & Benefits of the AM Cuber



- Attractive stainless steel finish
- Individual top-hat style cubes eliminates clumping and allow for easy filling of glass
- **AM Series Cubers** were designed with fewer moving parts, which contribute to its long life and dependability
- Compact size (less than 15 inches wide), undercounter design, swing style reversible door, and UL approval for outdoor use, expand the possibilities where this machine can be installed
- Front-in and front-out airflow allows unit to be built into cabinetry without additional ventilation
- Ice-making compartment can be easily disassembled for cleaning
- Door system is designed to accommodate custom cabinetry
- ADA Compliant models available



## Features & Benefits of the KM Cuber



### KM|EDGE DESIGN

- Benefits include increased productivity and energy savings, even in harsh water conditions
- The **KMEdge Cuber Series** features an attractive stainless steel finish with the simplest ice making system in the industry
- The exclusive dual-sided stainless steel evaporator has oval-shaped copper refrigerant tubing for the most efficient heat exchange
- HOSHIZAKI's evaporator design freezes the purest water, washing most of the minerals and impurities down the drain; resulting in individual, crystal clear crescent cubes
- Not affected by caustic water, therefore no plating to peel or flake and no plastic to crack
- CycleSaver™ design allows production of the same amount of ice in half the cycles of other ice machines. Fewer moving parts and cycles means dependability, longer machine life and energy savings!
- EverCheck™ control board sounds an audible warning when service is needed
- Contains H-GUARD Plus® Antimicrobial Agent





# CUBER Self-Contained

## AM-50BAJ




-DS shown with Custom Cabinetry



### Undercounter **AM** Cubers with Built-In Bins

Dimensions: 14 <sup>7</sup>/<sub>8</sub>"W X 22 <sup>5</sup>/<sub>8</sub>"D X 33 <sup>1</sup>/<sub>2</sub>"H  
The ADA compliant machine dimensions are 14<sup>7</sup>/<sub>8</sub>"W x 22<sup>5</sup>/<sub>8</sub>"D x 31<sup>1</sup>/<sub>2</sub>" H

**Self-Contained Bin Storage Capacity Up to 22 Lbs.**

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>AM-50BAJ</b>	Air-Cooled	35	51	115V/60/1	10.4	97 Lbs.	<b>\$5,240</b>
<b>AM-50BAJ-DS†</b>	Air-Cooled	35	51	115V/60/1	10.4	97 Lbs.	<b>\$5,340</b>
<b>AM-50BAJ-AD*</b>	Air-Cooled	34	55	115V/60/1	9.9	99 Lbs.	<b>\$5,460</b>
<b>AM-50BAJ-ADDS†*</b>	Air-Cooled	34	55	115V/60/1	9.9	99 Lbs.	<b>\$5,610</b>

**Accessories:** **HS-0229** DS Door Reversal Part (*Order as a Service Part*)  
**HS-5061** Drain Pump (Beckett Brand) 1 Year Warranty - Parts & labor (*Order as Accessory*) \$890  
**HS-0182** Side Trim Kit \$340  
**HS-2133** 2" Top Spacer Kit available \$250  
**H9320-51** Recommended Water Filtration - Single Configuration \$530





UL approved for outdoor use  
 †DS Models - Wood Door System (Designed to accommodate custom cabinetry)  
 \*ADA compliant

## KM-81BAJ





### Undercounter **KMEdge** Cuber with Built-In Bin

Dimensions: 17 <sup>3</sup>/<sub>4</sub>"W X 24"D X 39"H (6" Legs Included)

**Self-Contained Bin Storage Capacity Up to 38 Lbs.†**

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>KM-81BAJ*</b>	Air-Cooled	52	78	115V/60/1	8.45	125 Lbs.	<b>\$4,700</b>

**Accessories:** **HS-5061** Drain Pump (Beckett Brand) 1 Year Warranty - Parts & labor (*Order as Accessory*) \$890  
**H9320-51** Recommended Water Filtration - Single Configuration \$530








†Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft<sup>3</sup> average density of ice.  
 \*ENERGY STAR qualified

## KM-116BAJ





### Undercounter **KMEdge** Cuber with Built-In Bin

Dimensions: 23 <sup>3</sup>/<sub>4</sub>"W X 24"D X 39"H (6" Legs Included)

**Self-Contained Bin Storage Capacity Up to 53 Lbs.†**

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>KM-116BAJ*</b>	Air-Cooled	100	125	115V/60/1	8.1	146 Lbs.	<b>\$5,300</b>

**Accessories:** **HS-5061** Drain Pump (Beckett Brand) 1 Year Warranty - Parts & labor (*Order as Accessory*) \$890  
**H9320-51** Recommended Water Filtration - Single Configuration \$530








†Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft<sup>3</sup> average density of ice.  
 \*ENERGY STAR qualified



# CUBER Self-Contained


		<h2>Undercounter <i>KMEdge</i> Cuber with Built-In Bin</h2>						<b>Self-Contained Bin Storage Capacity Up to 78 Lbs.†</b>	
		Dimensions: 23 <sup>3/4</sup> "W X 28 <sup>1/4</sup> "D X 39"H (6" Legs Included)							
		Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>KM-161BAJ</b>	Air-Cooled	123	163	115V/60/1	8.6	159 Lbs.	<b>\$5,810</b>		
<b>KM-161BWJ</b>	Water-Cooled	135	153	115V/60/1	6.5	163 Lbs.	<b>\$6,150</b>		
<b>Accessories: H9320-51</b> Recommended Water Filtration - Single Configuration							\$530		
    									
†Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft <sup>3</sup> average density of ice.									

		<h2>Undercounter <i>KMEdge</i> Cuber with Built-In Bin</h2>						<b>Self-Contained Bin Storage Capacity Up to 80 Lbs.†</b>	
		Dimensions: 24"W X 28"D X 39"H (6" Legs Included)							
		Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>KM-231BAJ</b>	Air-Cooled	147	213	115V/60/1	8.4	165 Lbs.	<b>\$6,300</b>		
<b>Accessories: H9320-51</b> Recommended Water Filtration - Single Configuration							\$530		
    									
†Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft <sup>3</sup> average density of ice.									

		<h2>Undercounter <i>KMEdge</i> Cuber with Built-In Bin</h2>						<b>Self-Contained Bin Storage Capacity Up to 100 Lbs.†</b>	
		Dimensions: 30"W X 28"D X 39"H (6" Legs Included)							
		Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>KM-301BAJ</b>	Air-Cooled	212	290	115V/60/1	7.1	206 Lbs.	<b>\$7,350</b>		
<b>KM-301BWJ</b>	Water-Cooled	237	285	115V/60/1	4.90	189 Lbs.	<b>\$7,420</b>		
<b>Accessories: H9320-51</b> Recommended Water Filtration - Single Configuration							\$530		
    									
†Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft <sup>3</sup> average density of ice.									



## KMEDGE X ICE MACHINE SERIES

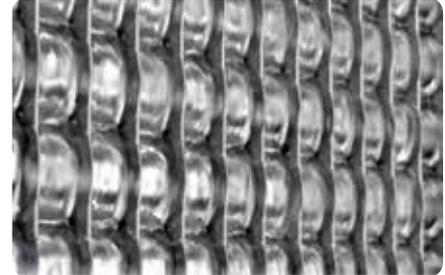

- **Reliable operation** with stronger, more durable construction, less service parts, and increased ice production.
- **Easier installation** with a more compact footprint and factory installed ultrasonic bin control.
- **Simple maintenance** with new CleanAssist technology and redesigned float switch for one-hour cleaning.

### KM-350M\_J

### KMEdge X Series Cubers

Ice Machine Dimensions: 22"W X 27<sup>3/8</sup>"D X 28"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>KM-350MAJ*</b>	Air-Cooled	393	489	115V/60/1	5.4	175 Lbs.	<b>\$7,480</b>
<b>KM-350MWJ</b>	Water-Cooled	383	414	115V/60/1	4.9	175 Lbs.	<b>\$7,510</b>

**Accessories:** **H9320-51** Recommended Water Filtration - Single Configuration \$530  
**HS-5426** Tamper Proof Kit - Air-Cooled Units \$590  
**HS-5427** Tamper Proof Kit - Water/Remote Units \$590

B-300  
22 x 32 1/2 x 74

B-500  
30 x 32 1/2 x 74

B-700  
44 x 32 1/2 x 74

B-800  
48 x 32 1/2 x 74

B-900  
52 x 32 1/2 x 74

\*ENERGY STAR qualified

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

### KM-420M\_J

### KMEdge X Series Cubers

Ice Machine Dimensions: 22"W X 27<sup>3/8</sup>"D X 28"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>KM-420MAJ*</b>	Air-Cooled	440	508	115V/60/1	5.3	175 Lbs.	<b>\$7,600</b>
<b>KM-420MWJ</b>	Water-Cooled	435	472	115V/60/1	4.7	175 Lbs.	<b>\$7,740</b>
<b>KM-420MRJZ*</b>	Remote A-C	460	521	115V/60/1	5.0	175 Lbs.	<b>\$7,470</b>

**Accessories:** **H9320-51** Recommended Water Filtration - Single Configuration \$530  
**HS-5426** Tamper Proof Kit - Air-Cooled Units \$590  
**HS-5427** Tamper Proof Kit - Water/Remote Units \$590

B-300  
22 x 32 1/2 x 74

B-500  
30 x 32 1/2 x 74

B-700  
44 x 32 1/2 x 74

B-800  
48 x 32 1/2 x 74

B-900  
52 x 32 1/2 x 74

Use URC-5F Condenser for Remote Air-Cooled Unit

\*Always pair "Z" model ice machines with "Z" model remote condenser.

\*ENERGY STAR qualified

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

# CUBER

## KM-520M\_J

## KMEdge X Series Cubers

Ice Machine Dimensions: 22"W X 27 <sup>3</sup>/<sub>8</sub>"D X 28"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>KM-520MAJ*</b>	Air-Cooled	480	556	115V/60/1	4.7	175 Lbs.	<b>\$8,000</b>
<b>KM-520MWJ</b>	Water-Cooled	444	474	115V/60/1	4.7	175 Lbs.	<b>\$8,140</b>
<b>KM-520MRJ*</b>	Remote A-C	495	547	115V/60/1	4.8	175 Lbs.	<b>\$7,870</b>
<b>KM-520MRJZ**</b>	Remote A-C	495	547	115V/60/1	4.8	175 Lbs.	<b>\$7,870</b>

Model Number	Condenser	Kgs. of Ice per 24 hours 32°A / 21°W	Kgs. of Ice per 24 hours 21°A / 10°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>KM-520MAJ-E*</b>	Air-Cooled	197	238	220-240V/50/1	4.9	68 Kg.	<b>\$8,210</b>

**Accessories:** **H9320-51** Recommended Water Filtration - Single Configuration \$530  
**HS-5426** Tamper Proof Kit - Air-Cooled Units \$590  
**HS-5427** Tamper Proof Kit - Water/Remote Units \$590

Use URC-5F Condenser for Remote Air-Cooled Unit  
 "E" suffix designates 50 hertz model see spec sheet for certifications  
 \*Always pair "Z" model ice machines with "Z" model remote condenser.  
 \*ENERGY STAR qualified

B-300  
 22 x 32 1/2 x 74

B-500  
 30 x 32 1/2 x 74

B-700  
 44 x 32 1/2 x 74

B-800  
 48 x 32 1/2 x 74

B-900  
 52 x 32 1/2 x 74

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

## KM-660M\_J

## KMEdge X Series Cubers

Ice Machine Dimensions: 22"W X 27 <sup>3</sup>/<sub>8</sub>"D X 28"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>KM-660MAJ</b>	Air-Cooled	617	665	115V/60/1	5.1	180 Lbs.	<b>\$9,110</b>
<b>KM-660MWJ</b>	Water-Cooled	668	669	115V/60/1	4.3	180 Lbs.	<b>\$9,410</b>
<b>KM-660MRJ*</b>	Remote A-C	570	642	115V/60/1	5.25	180 Lbs.	<b>\$8,990</b>
<b>KM-660MRJZ**</b>	Remote A-C	570	642	115V/60/1	5.25	180 Lbs.	<b>\$8,990</b>

Model Number	Condenser	Kgs. of Ice per 24 hours 32°A / 21°W	Kgs. of Ice per 24 hours 21°A / 10°W	Electrical	kWh per 45 Kgs.	Shipping Weight	List F.O.B. Griffin
<b>KM-660MAJ-E</b>	Air-Cooled	262	280	220-240V/50/1	4.9	68 Kg.	<b>\$9,370</b>

**Accessories:** **H9320-51** Recommended Water Filtration - Single Configuration \$530  
**HS-5426** Tamper Proof Kit - Air-Cooled Units \$590  
**HS-5427** Tamper Proof Kit - Water/Remote Units \$590

Use URC-5F Condenser for Remote Air-Cooled Unit  
 "E" suffix designates 50 hertz model see spec sheet for certifications  
 †Always pair "Z" model ice machines with "Z" model remote condenser.  
 \*ENERGY STAR qualified

B-300  
 22 x 32 1/2 x 74

B-500  
 30 x 32 1/2 x 74

B-700  
 44 x 32 1/2 x 74

B-800  
 48 x 32 1/2 x 74

B-900  
 52 x 32 1/2 x 74

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.



# CUBER

## KM-901M\_J



### KMEdge Cubers

Ice Machine Dimensions: 30"W X 27<sup>3/8</sup>"D X 32<sup>1/2</sup>"H



Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>KM-901MAJ</b>	Air-Cooled	753	905	208-230V/60/1	5.0	260 Lbs.	<b>\$12,250</b>
<b>KM-901MWJ</b>	Water-Cooled	870	950	208-230V/60/1	3.6	250 Lbs.	<b>\$12,530</b>
<b>KM-901MRJ*</b>	Remote A-C	853	904	208-230V/60/1	4.5	250 Lbs.	<b>\$12,100</b>
<b>KM-901MRJZ†</b>	Remote A-C	780	900	208-230V/60/3	4.75	255 Lbs.	<b>\$12,100</b>
<b>KM-901MRJ3*</b>	Remote A-C	830	927	208-230V/60/3	4.4	250 Lbs.	<b>\$12,530</b>
<b>KM-901MRJZ3†</b>	Remote A-C	780	900	208-230V/60/3	4.75	255 Lbs.	<b>\$12,530</b>


**Accessories:** **H9320-52** Recommended Water Filtration - Twin Configuration \$890  
**HS-5245** Tamper Proof Kit - Air-Cooled Units \$680  
**HS-5246** Tamper Proof Kit - Water/Remote Units \$680



Use URC-14F Condenser for Remote Air-Cooled Unit

\*ENERGY STAR qualified

†Always pair "Z" model ice machines with "Z" model remote condenser.

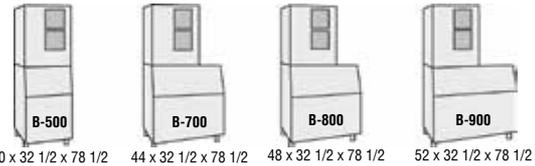

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

## KM-1100M\_J



### KMEdge Cubers

Ice Machine Dimensions: 30"W X 27<sup>3/8</sup>"D X 32<sup>1/2</sup>"H



Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>KM-1100MAJ</b>	Air-Cooled	935	1087	208-230V/60/1	4.9	290 Lbs.	<b>\$14,140</b>
<b>KM-1100MWJ</b>	Water-Cooled	1006	1073	208-230V/60/1	4.0	280 Lbs.	<b>\$14,020</b>
<b>KM-1100MRJ</b>	Remote A-C	1030	1156	208-230V/60/1	4.5	272 Lbs.	<b>\$13,630</b>
<b>KM-1100MRJZ†</b>	Remote A-C	1030	1156	208-230V/60/1	4.5	272 Lbs.	<b>\$13,630</b>

Model Number	Condenser	Kgs. of Ice per 24 hours 32°A / 21°W	Kgs. of Ice per 24 hours 21°A / 10°W	Electrical	kWh per 45 Kgs.	Shipping Weight	List F.O.B. Griffin
<b>KM-1100MAJ50</b>	Air-Cooled	356	464	220-240V/50/1	5.7	136 Kg.	<b>\$14,150</b>


**Accessories:** **H9320-52** Recommended Water Filtration - Twin Configuration \$890  
**HS-5245** Tamper Proof Kit - Air-Cooled Units \$680  
**HS-5246** Tamper Proof Kit - Water/Remote Units \$680



Use URC-14F Condenser for Remote Air-Cooled Unit

"E" suffix designates 50 hertz model see spec sheet for certifications

†Always pair "Z" model ice machines with "Z" model remote condenser.

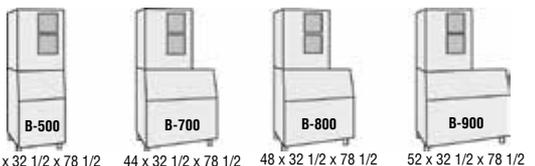

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.



# CUBER

## KM-1301S\_J

## KMEdge Cubers

Ice Machine Dimensions: 48"W X 27<sup>3/8</sup>"D X 27<sup>3/8</sup>"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>KM-1301SAJ</b>	Air-Cooled	1301	1365	208-230V/60/1	4.27	338 Lbs.	<b>\$15,590</b>
<b>KM-1301SWJ</b>	Water-Cooled	1230	1247	208-230V/60/1	3.76	335 Lbs.	<b>\$15,720</b>
<b>KM-1301SRJ</b>	Remote A-C	1260	1400	208-230V/60/1	4.28	335 Lbs.	<b>\$15,460</b>
<b>KM-1301SRJZ*†</b>	Remote A-C	1260	1400	208-230V/60/1	4.28	335 Lbs.	<b>\$15,460</b>
<b>KM-1301SRJZ3*†</b>	Remote A-C	1260	1400	208-230V/60/1	4.28	335 Lbs.	<b>\$15,590</b>
<b>KM-1301SAJ3*</b>	Air-Cooled	1350	1427	208-230V/60/3	3.95	338 Lbs.	<b>\$15,720</b>
<b>KM-1301SWJ3</b>	Water-Cooled	1355	1360	208-230V/60/3	3.25	335 Lbs.	<b>\$16,160</b>
<b>KM-1301SRJ3*</b>	Remote A-C	1330	1433	208-230V/60/3	3.83	339 Lbs.	<b>\$15,590</b>

Model Number	Condenser	Kgs. of Ice per 24 hours 32°A / 21°W	Kgs. of Ice per 24 hours 21°A / 10°W	Electrical	kWh per 45 Kgs.	Shipping Weight	List F.O.B. Griffin
<b>KM-1301SAJ-E</b>	Air-Cooled	501	624	220-240/50/1	4.5	154 Kgs.	<b>\$16,440</b>

**Accessories:** **H9320-53** Recommended Water Filtration - Triple Configuration \$1,240  
**HS-5252** Tamper Proof Kit - Air-Cooled Units \$750  
**HS-5253** Tamper Proof Kit - Water/Remote Units \$750

Use URC-14F Condenser for Remote Air-Cooled Unit  
 "E" suffix designates 50 hertz model  
 see spec for certifications  
 †Always pair "Z" model ice machines with "Z" model remote condenser.

\*ENERGY STAR qualified

48 x 32 1/2 x 73 3/8    48 x 32 1/2 x 101 3/4    52 x 32 1/2 x 73 3/8    52 x 32 1/2 x 101 3/4

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

## KM-1340M\_J

## KMEdge Cubers

Ice Machine Dimensions: 30"W X 27<sup>3/8</sup>"D X 41<sup>1/2</sup>"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>KM-1340MAJ</b>	Air-Cooled	1089	1275	208-230V/60/1	4.81	315 Lbs.	<b>\$15,580</b>
<b>KM-1340MWJ</b>	Water-Cooled	1280	1323	208-230V/60/1	3.6	315 Lbs.	<b>\$15,700</b>
<b>KM-1340MRJ</b>	Remote A-C	1177	1371	208-230V/60/1	4.54	289 Lbs.	<b>\$15,430</b>
<b>KM-1340MRJZ†</b>	Remote A-C	1266	1428	208-230V/60/3	4.54	289 Lbs.	<b>\$15,430</b>
<b>KM-1340MRJZ3*†</b>	Remote A-C	1266	1428	208-230V/60/3	4.12	289 Lbs.	<b>\$15,700</b>

**Accessories:** \*\***HS-5030** Transformer Kit - 4 wire to 3 wire (eliminates need for dedicated neutral) \$240  
**H9320-53** Recommended Water Filtration - Triple Configuration \$1,240

Use URC-14F Condenser for Remote Air-Cooled Unit  
 \*ENERGY STAR qualified

†Always pair "Z" model ice machines with "Z" model remote condenser.

30 x 32 1/2 x 87 1/2    44 x 32 1/2 x 87 1/2    48 x 32 1/2 x 87 1/2    52 x 32 1/2 x 87 1/2

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.



# CUBER

KM-1601MRJ



## KMEdge Cubers

Ice Machine Dimensions: 30"W X 27<sup>3/8</sup>"D X 41<sup>5/8</sup>"H



Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>KM-1601MRJ</b>	Remote A-C	1550	1594	208-230V/60/1	4.35	316 Lbs.	<b>\$17,970</b>
<b>KM-1601MRJZ†</b>	Remote A-C	1550	1594	208-230V/60/1	4.35	316 Lbs.	<b>\$17,970</b>
<b>KM-1601MRJ3</b>	Remote A-C	1550	1653	208-230V/60/3	4.09	316 Lbs.	<b>\$18,370</b>
<b>KM-1601MRJ3†</b>	Remote A-C	1550	1594	208-230V/60/3	4.09	316 Lbs.	<b>\$18,370</b>

**Accessories:** \*\***HS-5030** Transformer Kit - 4 wire to 3 wire (eliminates need for dedicated neutral) \$240  
**H9320-53** Recommended Water Filtration - Triple Configuration \$1,240







Use URC-22F Condenser for Remote Air-Cooled Unit

†Always pair "Z" model ice machines with "Z" model remote condenser.

  
 30 x 32 1/2 x 87 1/2

  
 44 x 32 1/2 x 87 1/2

  
 48 x 32 1/2 x 87 1/2

  
 52 x 32 1/2 x 87 1/2

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

KM-1601S\_J



## KMEdge Cubers

Ice Machine Dimensions: 48"W X 27<sup>3/8</sup>"D X 27<sup>3/8</sup>"H



Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>KM-1601SAJ</b>	Air-Cooled	1433	1513	208-230V/60/1	4.24	345 Lbs.	<b>\$18,120</b>
<b>KM-1601SWJ</b>	Water-Cooled	1650	1660	208-230V/60/1	3.30	335 Lbs.	<b>\$18,170</b>
<b>KM-1601SRJ*</b>	Remote A-C	1600	1640	208-230V/60/1	3.96	315 Lbs.	<b>\$17,680</b>
<b>KM-1601SRJZ†</b>	Remote A-C	1600	1640	208-230V/60/1	3.96	315 Lbs.	<b>\$17,680</b>
<b>KM-1601SAJ3</b>	Air-Cooled	1414	1513	208-230V/60/3	4.40	350 Lbs.	<b>\$18,600</b>
<b>KM-1601SWJ3</b>	Water-Cooled	1660	1671	208-230V/60/3	3.32	345 Lbs.	<b>\$18,290</b>
<b>KM-1601SRJ3</b>	Remote A-C	1600	1635	208-230V/60/3	4.14	355 Lbs.	<b>\$18,170</b>
<b>KM-1601SRJ3Z†</b>	Remote A-C	1600	1635	208-230V/60/3	4.14	355 Lbs.	<b>\$18,170</b>

**Accessories:** **HS-5030** Transformer Kit - 4 wire to 3 wire (eliminates need for dedicated neutral) \$240  
**H9320-53** Recommended Water Filtration - Triple Configuration \$1,240  
**HS-5252** Tamper Proof Kit - Air-Cooled Units \$750  
**HS-5253** Tamper Proof Kit - Water/Remote Units \$750









Use URC-22F Condenser for Remote Air-Cooled Unit

†Always pair "Z" model ice machines with "Z" model remote condenser.

  
 48 x 32 1/2 x 73 3/8

  
 48 x 32 1/2 x 101 3/4

  
 52 x 32 1/2 x 73 3/8

  
 52 x 32 1/2 x 101 3/4

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

\*ENERGY STAR qualified



# CUBER

## KM-1900S\_J





## KMEdge Cubers

Ice Machine Dimensions: 48"W X 27 <sup>3/8</sup>"D X 36 <sup>7/16</sup>"H



Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>KM-1900SAJ*</b>	Air-Cooled	1675	1875	208-230V/60/1	3.9	415 Lbs.	<b>\$19,630</b>
<b>KM-1900SWJ</b>	Water-Cooled	1875	1880	208-230V/60/1	3.2	415 Lbs.	<b>\$19,750</b>
<b>KM-1900SRJ*</b>	Remote A-C	1700	1933	208-230V/60/1	3.9	415 Lbs.	<b>\$19,500</b>
<b>KM-1900SRJZ†*</b>	Remote A-C	1700	1933	208-230V/60/1	3.9	415 Lbs.	<b>\$19,500</b>
<b>KM-1900SAJ3*</b>	Air-Cooled	1700	1933	208-230V/60/3	3.9	415 Lbs.	<b>\$19,750</b>
<b>KM-1900SWJ3</b>	Water-Cooled	1675	1865	208-230V/60/3	3.9	415 Lbs.	<b>\$20,280</b>
<b>KM-1900SRJ3*</b>	Remote A-C	1875	1880	208-230V/60/3	3.2	415 Lbs.	<b>\$19,630</b>
<b>KM-1900SRJZ3†*</b>	Remote A-C	1700	1933	208-230V/60/3	3.9	415 Lbs.	<b>\$19,630</b>

**Accessories:** **HS-5030** Transformer Kit - 4 wire to 3 wire (eliminates need for dedicated neutral) \$240  
**HS-5255** Tamper Proof Kit \$618  
**H9320-53** Recommended Water Filtration - Triple Configuration \$1,240







48 x 32 1/2 x 82 7/16    48 x 32 1/2 x 119 7/8    52 x 32 1/2 x 82 7/16    52 x 32 1/2 x 119 7/8

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

Use URC-22F Condenser for Remote Air-Cooled Unit  
 \*ENERGY STAR qualified  
 †Always pair "Z" model ice machines with "Z" model remote condenser.

## KM-2200S\_J3





## KMEdge Cubers

Ice Machine Dimensions: 48"W X 27 <sup>3/8</sup>"D X 36 <sup>7/16</sup>"H


Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>KM-2200SWJ3</b>	Water-Cooled	2200	2221	208-230V/60/3	3.11	400 Lbs.	<b>\$24,270</b>
<b>KM-2200SRJ3*</b>	Remote A-C	2075	2206	208-230V/60/3	3.75	400 Lbs.	<b>\$24,270</b>
<b>KM-2200SRJZ3†*</b>	Remote A-C	2075	2206	208-230V/60/3	3.75	400 Lbs.	<b>\$24,270</b>


**Accessories:** **HS-5255** Tamper Proof Kit \$618  
**H9320-53** Recommended Water Filtration - Triple Configuration \$1,240











48 x 32 1/2 x 82 7/16    48 x 32 1/2 x 119 7/8    52 x 32 1/2 x 82 7/16    52 x 32 1/2 x 119 7/8

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

Use URC-22F Condenser for Remote Air-Cooled Unit  
 \*ENERGY STAR qualified  
 †Always pair "Z" model ice machines with "Z" model remote condenser.



# CUBER

## KM-2600S\_J3





## KMEdge Cubers

Ice Machine Dimensions: 48"W X 27 <sup>3/8</sup>"D X 36 <sup>7/16</sup>"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>KM-2600SWJ3</b>	Water-Cooled	2480	2482	208-230V/60/3	3.6	440 Lbs.	<b>\$27,470</b>
<b>KM-2600SRJ3*</b>	Remote A-C	2580	2617	208-230V/60/3	3.61	440 Lbs.	<b>\$26,350</b>
<b>KM-2600SRJZ3*</b>	Remote A-C	2580	2617	208-230V/60/3	3.61	440 Lbs.	<b>\$26,350</b>


**Accessories:** **HS-5255** Tamper Proof Kit \$618  
**H9320-53** Recommended Water Filtration - Triple Configuration \$1,240



Use URC-26J Condenser for Remote Air-Cooled Unit

**\*ENERGY STAR qualified**

†Always pair "Z" model ice machines with "Z" model remote condenser.



48 x 32 1/2 x 82 7/16    48 x 32 1/2 x 119 7/8    52 x 32 1/2 x 82 7/16    52 x 32 1/2 x 119 7/8

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

## KMH-2100S\_J





## KMEdge Cubers

Ice Machine Dimensions: 36"W X 40"D X 36 <sup>7/16</sup>"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>KMH-2100SWJ3</b>	Water-Cooled	2000	2060	208-230V/60/3	2.92	415 Lbs.	<b>\$23,290</b>
<b>KMH-2100SRJ*</b>	Remote A-C	1850	2034	208-230V/60/1	3.75	415 Lbs.	<b>\$22,980</b>
<b>KMH-2100SRJ3*</b>	Remote A-C	1925	2026	208-230V/60/3	3.67	415 Lbs.	<b>\$23,110</b>
<b>KMH-2100SRJZ1*</b>	Remote A-C	1925	2026	208-230V/60/3	3.67	415 Lbs.	<b>\$22,980</b>
<b>KMH-2100SRJZ3+*</b>	Remote A-C	1925	2026	208-230V/60/3	3.67	415 Lbs.	<b>\$23,110</b>

**Accessories:** **HS-5030** Transformer Kit - 4 wire to 3 wire (eliminates need for dedicated neutral) \$240  
**H9320-53** Recommended Water Filtration - Triple Configuration \$1,240



Use URC-22F Condenser for Remote Air-Cooled Unit

**\*ENERGY STAR qualified**

†Always pair "Z" model ice machines with "Z" model remote condenser.

## KMD-410M\_J






## KMEdge Cubers

Ice Machine Dimensions: 22"W X 24"D X 24"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>KMD-410MAJ</b>	Air-Cooled	351	418	115-120V/60/1	5.7	161 Lbs.	<b>\$7,390</b>
<b>KMD-410MWJ</b>	Water-Cooled	382	440	115-120V/60/1	4.3	163 Lbs.	<b>\$7,720</b>

**Accessories:** **H9320-51** Recommended Water Filtration - Single Configuration \$530





22 x 30 1/2 x 35 3/8    22 x 32 1/2 x 68 1/8

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.



# CUBER Dispenser

## KMD-460M\_J

## KMEdge Cubers

Ice Machine Dimensions: 30"W X 24 1/4"D X 22 1/8"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>KMD-460MAJ</b>	Air-Cooled	400	440	115-120V/60/1	5.5	170 Lbs.	<b>\$8,070</b>
<b>KMD-460MWJ</b>	Water-Cooled	472	487	115-120V/60/1	4.1	170 Lbs.	<b>\$8,200</b>

**Accessories:** H9320-51 Recommended Water Filtration - Single Configuration \$530

22 x 30 1/2 x 34

30 x 32 1/2 x 68 1/8

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

## KMD-530M\_J

## KMEdge Cubers

Ice Machine Dimensions: 30"W X 24 1/4"D X 22 1/8"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>KMD-530MAJ</b>	Air-Cooled	442	501	115V/60/1	5.7	170 Lbs.	<b>\$8,450</b>
<b>KMD-530MWJ</b>	Water-Cooled	500	515	115V/60/1	4.7	170 Lbs.	<b>\$8,570</b>
<b>KMD-530MRJ</b>	Remote A-C	440	498	115V/60/1	6.1	170 Lbs.	<b>\$8,300</b>
<b>KMD-530MRJZ†</b>	Remote A-C	440	498	115V/60/1	6.1	170 Lbs.	<b>\$8,300</b>

**Accessories:** H9320-51 Recommended Water Filtration - Single Configuration \$530

22 x 30 1/2 x 34

30 x 32 1/2 x 68 1/8

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

Use URC-5F Condenser for Remote Air-Cooled Unit  
†Always pair "Z" model ice machines with "Z" model remote condenser.

## KMD-860M\_J

## KMEdge Cubers

Ice Machine Dimensions: 30"W X 24 5/8"D X 28"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>KMD-860MAJ</b>	Air-Cooled	665	855	208-230V/60/1	5.16	248 Lbs.	<b>\$12,080</b>
<b>KMD-860MWJ</b>	Water-Cooled	862	940	208-230V/60/1	3.90	258 Lbs.	<b>\$12,210</b>
<b>KMD-860MRJ</b>	Remote A-C	850	967	208-230V/60/1	5.05	256 Lbs.	<b>\$11,940</b>
<b>KMD-860MRJZ†</b>	Remote A-C	850	967	208-230V/60/1	5.05	256 Lbs.	<b>\$11,940</b>

**Accessories:** H9320-52 Recommended Water Filtration - Twin Configuration \$890

30 x 30 1/2 x 39 5/8

30 x 32 1/2 x 68 1/8

48 x 32 1/2 x 74

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

Use URC-9F Condenser for Remote Air-Cooled Unit  
†Always pair "Z" model ice machines with "Z" model remote condenser.



# CUBER Low Profile

## KML-325M\_J

## Low Profile *KMEdge* Cubers

Ice Machine Dimensions: 30"W X 27 <sup>3</sup>/<sub>8</sub>" D X 22"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>KML-325MAJ</b>	Air-Cooled	300	380	115V/60/1	5.72	185 Lbs.	<b>\$6,910</b>
<b>KML-325MWJ</b>	Water-Cooled	355	385	115V/60/1	4.51	185 Lbs.	<b>\$7,060</b>

**Accessories: H9320-51** Recommended Water Filtration - Single Configuration \$530

30 x 32 1/2 x 55 3/8

30 x 32 1/2 x 68

30 x 30 x 75

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

## KML-500M\_J

## Low Profile *KMEdge* Cubers

Ice Machine Dimensions: 30"W X 27 <sup>3</sup>/<sub>8</sub>" D X 22"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>KML-500MAJ</b>	Air-Cooled	400	442	115V/60/1	5.55	185 Lbs.	<b>\$7,990</b>
<b>KML-500MWJ</b>	Water-Cooled	515	543	115V/60/1	4.33	185 Lbs.	<b>\$8,130</b>

**Accessories: H9320-51** Recommended Water Filtration - Single Configuration \$530

30 x 32 1/2 x 55 3/8

30 x 32 1/2 x 68

30 x 30 x 75

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

## KML-700M\_J

## Low Profile *KMEdge* Cubers

Ice Machine Dimensions: 30"W X 27 <sup>3</sup>/<sub>8</sub>" D X 26"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>KML-700MAJ*</b>	Air-Cooled	610	662	115V/60/1	4.90	204 Lbs.	<b>\$9,610</b>
<b>KML-700MWJ</b>	Water-Cooled	660	665	115V/60/1	3.79	202 Lbs.	<b>\$9,900</b>
<b>KML-700MRJ*</b>	Remote A-C	614	657	115V/60/1	4.90	200 Lbs.	<b>\$9,470</b>
<b>KML-700MRJZ*†</b>	Remote A-C	614	657	115V/60/1	4.90	200 Lbs.	<b>\$9,470</b>

**Accessories: H9320-51** Recommended Water Filtration - Single Configuration \$530

30 x 32 1/2 x 59 3/8

30 x 32 1/2 x 72

30 x 30 x 79

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

Use URC-9F Condenser for Remote Air-Cooled Unit  
\*ENERGY STAR qualified  
†Always pair "Z" model ice machines with "Z" model remote condenser.



# CUBER Serenity Series

<b>KMS-822MLJ</b> 		<b>KMEdge Cuber</b>						
		Ice Machine Dimensions: 22"W X 24 <sup>5/8</sup> "D X 28"H						
	<b>Model Number</b>	<b>Condenser</b>	<b>Lbs. of Ice per 24 hours 90°A / 70°W</b>	<b>Lbs. of Ice per 24 hours 70°A / 50°W</b>	<b>Electrical</b>	<b>kWh per 100 Lbs.</b>	<b>Shipping Weight</b>	<b>List F.O.B. Griffin</b>
	<b>KMS-822MLJ</b> using 1 Phase Remote Condenser	Remote A-C	770	851	115V/60/1*	5.3	150 Lbs.	<b>\$10,700</b>
		<b>Accessories:</b> <b>HS-5062</b> Extension bracket for Freestyle application \$210 <b>H9320-52</b> Recommended Water Filtration - Twin Configuration \$890						
		  						 <b>IBD 4500 22"</b> 22 x 30 1/2 x 35 3/8
		Designed for use on beverage dispensers Use SRK-10J Condenser for Remote Air-Cooled Unit (sold separately) *115V supply for the KMS Ice maker is supplied from the SRK remote condenser						See TOP KIT MATRIX (pg 35) for top kit options based on bin size.

<b>KMS-1122MLJ</b> 		<b>KMEdge Cuber</b>						
		Ice Machine Dimensions: 22"W X 18 <sup>1/8</sup> "D X 31 <sup>1/4</sup> "H						
	<b>Model Number</b>	<b>Condenser</b>	<b>Lbs. of Ice per 24 hours 90°A / 70°W</b>	<b>Lbs. of Ice per 24 hours 70°A / 50°W</b>	<b>Electrical</b>	<b>kWh per 100 Lbs.</b>	<b>Shipping Weight</b>	<b>List F.O.B. Griffin</b>
	<b>KMS-1122MLJ</b> using 1 Phase Remote Condenser	Remote A-C	1075	1151	115V/60/1*	4.2	152 Lbs.	<b>\$11,390</b>
	<b>KMS-1122MLJ</b> using 3 Phase Remote Condenser	Remote A-C	1100	1151	115V/60/3*	4.05	152 Lbs.	<b>\$11,390</b>
		<b>Accessories:</b> <b>H9320-52</b> Recommended Water Filtration - Twin Configuration \$890						
		  						 <b>Lancer FS22</b> 22 x 30 1/2 x 40 1/4
		Designed for use on beverage dispensers Use SRK-12J or SRK-12J3 Condenser for Remote Air-Cooled Unit (sold separately) *115V supply for the KMS Ice maker is supplied from the SRK remote condenser						



# CUBER Serenity Series

## KMS-1402MLJ





## KMEdge Cuber

Ice Machine Dimensions: 30"W X 24"D X 28"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>KMS-1402MLJ</b> <small>using 1 Phase Remote Condenser</small>	Remote A-C	1400	1501	115V/60/1*	4.3	178 Lbs.	<b>\$11,620</b>
<b>KMS-1402MLJ</b> <small>using 3 Phase Remote Condenser</small>	Remote A-C	1325	1474	115V/60/3*	4.55	178 Lbs.	<b>\$11,620</b>

**Accessories: H9320-52** Recommended Water Filtration - Twin Configuration \$890





**Lancer FS30**  
30 x 30 1/2 x 39 5/8



Designed for use on beverage dispensers.  
Use SRK-15J or SRK-15J3 Condenser for Remote Air-Cooled Unit (sold separately)  
\*115V supply for the KMS Ice maker is supplied from the SRK remote condenser

See TOP KIT MATRIX (pg 35) for top kit options based on bin size.

## KMS-2000MLJ





## KMEdge Cuber

Ice Machine Dimensions: 30"W X 24"D X 32 7/8"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>KMS-2000MLJ</b> <small>using 1 Phase Remote Condenser</small>	Remote A-C	1850	1926	208-230V/60/1*	4.50	206 Lbs.	<b>\$14,380</b>
<b>KMS-2000MLJ</b> <small>using 3 Phase Remote Condenser</small>	Remote A-C	1900	1938	208-230V/60/3*	4.30	206 Lbs.	<b>\$14,380</b>

**Accessories: H9320-53** Recommended Water Filtration - Triple Configuration \$1,240





**Lancer FS30**  
30 x 30 1/2 x 39 5/8




Designed for use on beverage dispensers.  
Use SRK-20J or SRK-20J3 Condenser for Remote Air-Cooled Unit (sold separately)  
\*208-230V supply for the KMS Ice maker is supplied from the SRK remote condenser

See TOP KIT MATRIX (pg 35) for top kit options based on bin size.



# SPECIALTY ICE

## Features & Benefits of the IM Square Cuber



- **HOSHIZAKI IM Square Cubers** utilize an ice making system that has an automatic rinse cycle, which means each ice cycle is made with fresh water protecting the integrity and flavor of the drink
- A closed water circuit offers the ultimate contamination protection, by reducing the number of points at which impurities can enter the ice making process
- A stainless steel exterior with integrated door handles provides a hygienic and high quality finish (Self-contained unit only)
- Removable door gaskets prevent any heat and contamination from entering the bin making the product easy to clean and maintain. (Self-contained unit only)
- Easily cleanable air filter extends the life of the ice machine
- **HOSHIZAKI IM Square Cubers** are electronically controlled for consistent quality of ice
- Natural foaming agent insulates the bin and preserves the quality and consistency of the ice produced longer than any other machine available - saving energy and money

IM-200BAC		IM Square Cuber with Built-In Bin						
						Dimensions: 39 1/2" W X 23 5/8" D X 33 1/2" H (including 6" legs)		<b>Self-Contained Bin Storage Capacity Up to 75 Lbs.†</b>
	Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
	IM-200BAC	Air-Cooled	150	188	115V/60/1	8.4	212 lbs.	<b>\$8,640</b>
<b>Accessories:</b> H9320-51 Recommended Water Filtration - Single Configuration								\$530
†Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.								

IM-500SAB		IM Square Cuber						
						Ice Machine Dimensions: 44"W X 27 5/8"D X 21 3/4"H		
	Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
	IM-500SAB	Air-Cooled	414	489	115V/60/1	5.8	234 Lbs.	<b>\$10,930</b>
<b>Accessories:</b> HS-5530 Stacking Kit (Order as Accessory)								\$740
<b>H9320-51</b> Recommended Water Filtration - Single Configuration								\$530
44 x 32 1/2 x 67 3/4    44 x 32 1/2 x 89 1/2    48 x 32 1/2 x 67 3/4    48 x 32 1/2 x 89 1/2    52 x 32 1/2 x 67 3/4    52 x 32 1/2 x 89 1/2    60 x 41 x 103 1/2								
Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.								





# SPECIALTY ICE

## Features & Benefits of the Sphere Ice and the Large 2" Square Cube Machines

- **Spheres** are 1.8" in diameter, clear and solid
- **2by2 Cubes** are 1.9" x 1.9" x 2.3", clear and solid
- Cubes have superior chilling ability and beautiful appearance
- Small footprint can easily fit under bar counter
- Up to 50 lbs. of ice production per 24 hours
- Built-in storage bin with 36 lbs. (sphere), 22 lbs. (2by2) capacity
- Durable stainless steel exterior
- Easy to clean air filter
- Foam injected polyurethane for insulation (HFC free)
- Closed water circuit offers the ultimate contamination protection
- Ice scoop included
- 6.5' power cord with NEMA 5-15P plug




<h3>IM-50BAA-Q</h3> 		<h2>Sphere Ice Machine with Built-In Bin</h2>						<b>Self-Contained Bin Storage Capacity Up to 50 Lbs.†</b>
		Dimensions: 24 3/4" W X 20 3/4" D X 39 1/2" H (6" Legs Included)						
	<b>Model Number</b>	<b>Condenser</b>	<b>Lbs. of Ice per 24 hours 90°A / 70°W</b>	<b>Lbs. of Ice per 24 hours 70°A / 50°W</b>	<b>Electrical</b>	<b>kWh per 100 Lbs.</b>	<b>Shipping Weight</b>	<b>List F.O.B. Griffin</b>
	IM-50BAA-Q	Air-Cooled	45	50	115V/60/1	15.7	150 Lbs.	\$11,990
								
		Removable/cleanable air filter Panels easily removed and all components accessible for service.						
		†Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft <sup>3</sup> average density of ice.						

<h3>IM-50BAA-LM</h3> 		<h2>Large 2" Square Cube Machine with Built-In Bin</h2>						<b>Self-Contained Bin Storage Capacity Up to 50 Lbs.†</b>
		Dimensions: 19 3/4" W X 17 3/4" D X 39 1/2" H (6" Legs Included)						
	<b>Model Number</b>	<b>Condenser</b>	<b>Lbs. of Ice per 24 hours 90°A / 70°W</b>	<b>Lbs. of Ice per 24 hours 70°A / 50°W</b>	<b>Electrical</b>	<b>kWh per 100 Lbs.</b>	<b>Shipping Weight</b>	<b>List F.O.B. Griffin</b>
	IM-50BAA-LM	Air-Cooled	45	50	115V/60/1	15.7	137 Lbs.	\$11,590
								
		Removable/cleanable air filter Panels easily removed and all components accessible for service.						
		†Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft <sup>3</sup> average density of ice.						




# FLAKER Self-Contained


## Features & Benefits of the Flaker / Cubelet Series



- Attractive stainless steel exterior
- Most models are available in both flaked and cubelet (nugget-style) ice
- The internal auger design produces the highest quality ice with fewer repairs and less down time
- The freezing cylinder is made from cast stainless steel
- The industry's only greaseless bearing design improves life of the machine
- **HOSHIZAKI Flaker and Cubelet** ice machines have electric water inlet valves and an automatic purge of water from the reservoir for cleaner operation and longer bearing life
- Advanced CleanCycle24™ design - 2 second rinse every hour
- Infrared bin control is standard and factory installed

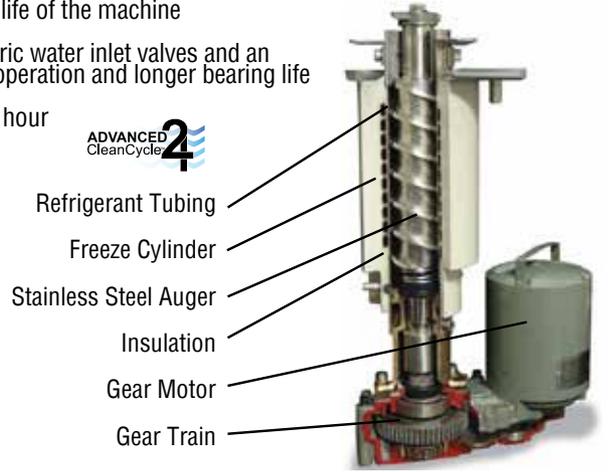

FLAKED ICE USAGE GUIDE	
Establishment	Approximate Daily Usage
Restaurant	1.5 lbs. ice per seat
Salad Bar/Seafood Display	30 lbs. ice per ft <sup>3</sup>
Hospital	
Patient Care	10 lbs. ice per bed
Cafeteria	1 lb. ice per seat
Nursing Home	6 lbs. per bed

			<h3>Undercounter FLAKER with Built-In Bin</h3>				<b>Self-Contained Bin Storage Capacity Up to 110 Lbs. †</b>		
	Dimensions: 36"W X 24 1/4"D X 39 1/4"H (6" Legs Included)								
	Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin	
<b>F-300BAJ</b>	Air-Cooled	247	353	115V/60/1	6.14	221 Lbs.	<b>\$11,050</b>		
<b>Accessories:</b> LP-6 LEG Four 6" Stainless Steel Legs Package available (optional) \$310 H9320-51 Recommended Water Filtration - Single Configuration \$530									
		  							
Four 6" Legs Package (LP-6P LEG) included									
†Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft <sup>3</sup> average density of ice.									

			<h3>Undercounter FLAKER with Built-In Bin</h3>				<b>Self-Contained Bin Storage Capacity Up to 80 Lbs. †</b>		
	Dimensions: 24"W X 26"D X 39"H (6" Legs Included)								
	Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin	
<b>F-330BAJ</b>	Air-Cooled	243	332	115V/60/1	5.91	178 Lbs.	<b>\$10,530</b>		
<b>Accessories:</b> LP-6 LEG Four 6" Stainless Steel Legs Package available (optional) \$310 H9320-51 Recommended Water Filtration - Single Configuration \$530									
		  							
Four 6" Legs Package (LP-6P LEG) included									
†Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft <sup>3</sup> average density of ice.									



# FLAKER

F-500BAJ



## Undercounter FLAKER with Built-In Bin



Dimensions: <b>38"W X 29"D X 42"H</b> (6" Legs Included)						<b>Self-Contained Bin Storage Capacity Up to 170 Lbs.†</b>	
Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>F-500BAJ</b>	Air-Cooled	420	536	115V/60/1	5.05	265 Lbs.	<b>\$13,300</b>

**Accessories:** **LP-6 LEG** Four 6" Stainless Steel Legs Package available (optional) \$310  
**H9320-51** Recommended Water Filtration - Single Configuration \$530





Four 6" Legs Package (**LP-6P LEG**) included

†Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft<sup>3</sup> average density of ice.

F-450MAJ



## FLAKER




Ice Machine Dimensions: <b>22"W X 27<sup>3/8</sup>"D X 22"H</b>							
Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>F-450MAJ</b>	Air-Cooled	395	492	115V/60/1	4.94	170 Lbs.	<b>\$9,660</b>


**Accessories:** **H9320-51** Recommended Water Filtration - Single Configuration \$530






  
**B-250**  
30 x 32 1/2 x 55 3/8

  
**B-300**  
22 x 32 1/2 x 68

  
**B-500**  
30 x 32 1/2 x 68


  
**B-700**  
44 x 32 1/2 x 68

  
**B-800**  
48 x 32 1/2 x 68

  
**B-900**  
52 x 32 1/2 x 68

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

F-801M\_J



## FLAKERS



Ice Machine Dimensions: <b>22"W X 27<sup>3/8</sup>"D X 26"H</b>							
Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>F-801MAJ*</b>	Air-Cooled	566	751	115V/60/1	4.5	205 Lbs.	<b>\$12,120</b>
<b>F-801MWJ</b>	Water-Cooled	605	680	115V/60/1	3.9	205 Lbs.	<b>\$12,260</b>

**Accessories:** **HS-2120** Cutter head for finer flaked ice \$260  
**H9320-51** Recommended Water Filtration - Single Configuration \$530







\*ENERGY STAR qualified

  
**B-250**  
30 x 32 1/2 x 59 3/8

  
**B-300**  
22 x 32 1/2 x 72

  
**B-500**  
30 x 32 1/2 x 72

  
**B-700**  
44 x 32 1/2 x 72

  
**B-800**  
48 x 32 1/2 x 72

  
**B-900**  
52 x 32 1/2 x 72

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.



# FLAKER

## F-1002M\_J

## FLAKERS

Ice Machine Dimensions: 22"W X 27<sup>3/8</sup>"D X 26"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>F-1002MAJ</b>	Air-Cooled	758	980	115V/60/1	4.36	210 Lbs.	<b>\$14,380</b>
<b>F-1002MWJ</b>	Water-Cooled	833	955	115V/60/1	3.57	205 Lbs.	<b>\$14,790</b>
<b>F-1002MRJ</b>	Remote A-C	744	864	115V/60/1	5.1	210 Lbs.	<b>\$14,250</b>
<b>F-1002MRJZ†</b>	Remote A-C	744	864	115V/60/1	5.1	210 Lbs.	<b>\$14,250</b>
<b>F-1002MLJ</b>	N/A	797	1028	115V/60/1	1.51	205 Lbs.	<b>\$14,110</b>

**Accessories:** **HS-2120** Cutter head for finer flaked ice \$260  
**H9320-51** Recommended Water Filtration - Single Configuration \$530

Use URC-5F Condenser for Remote Air-Cooled Unit

†Always pair "Z" model ice machines with "Z" model remote condenser.

B-300  
22 x 32 1/2 x 71 15/16

B-500  
30 x 32 1/2 x 71 15/16

B-700  
44 x 32 1/2 x 71 15/16

B-800  
48 x 32 1/2 x 71 15/16

B-900  
52 x 32 1/2 x 71 15/16

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

## F-1501M\_J

## FLAKERS

Ice Machine Dimensions: 30"W X 27<sup>3/8</sup>"D X 34<sup>7/16</sup>"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>F-1501MAJ</b>	Air-Cooled	1154	1543	208-230V/60/1	4.0	325 Lbs.	<b>\$18,980</b>
<b>F-1501MWJ</b>	Water-Cooled	1250	1431	208-230V/60/1	3.55	350 Lbs.	<b>\$19,120</b>
<b>F-1501MRJ</b>	Remote A-C	1140	1496	208-230V/60/1	4.40	325 Lbs.	<b>\$18,500</b>
<b>F-1501MRJZ†</b>	Remote A-C	1181	1536	208-230V/60/1	4.5	325 Lbs.	<b>\$18,500</b>

**Accessories:** **H9320-51** Recommended Water Filtration - Single Configuration \$530

Use URC-14F Condenser for Remote Air-Cooled Unit

†Always pair "Z" model ice machines with "Z" model remote condenser.

B-500  
30 x 32 1/2 x 79 1/4

B-700  
44 x 32 1/2 x 79 1/4

B-800  
48 x 32 1/2 x 79 1/4

B-900  
52 x 32 1/2 x 79 1/4

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

## F-2001M\_J

## FLAKERS

Ice Machine Dimensions: 30"W X 27<sup>1/2</sup>"D X 34<sup>7/16</sup>"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>F-2001MWJ</b>	Water-Cooled	1840	2043	208-230V/60/1	3.19	342 Lbs.	<b>\$24,930</b>
<b>F-2001MRJ</b>	Remote A-C	1660	2073	208-230V/60/1	3.81	360 Lbs.	<b>\$24,800</b>
<b>F-2001MRJZ†</b>	Remote A-C	1660	2073	208-230V/60/1	3.81	360 Lbs.	<b>\$24,800</b>
<b>F-2001MRJ3</b>	Remote A-C	1675	2098	208-230V/60/3	3.90	360 Lbs.	<b>\$24,930</b>
<b>F-2001MRJZ3†</b>	Remote A-C	1675	2098	208-230V/60/3	3.90	360 Lbs.	<b>\$24,930</b>
<b>F-2001MLJ</b>	N/A	1733	2280	115V/60/1	0.6	250 Lbs.	<b>\$23,110</b>

**Accessories:** **H9320-51** Recommended Water Filtration - Single Configuration \$530

Use URC-22F Condenser for Remote Air-Cooled Unit

†Always pair "Z" model ice machines with "Z" model remote condenser.

B-500  
30 x 32 1/2 x 79 1/4

B-700  
44 x 32 1/2 x 79 1/4

B-800  
48 x 32 1/2 x 79 1/4

B-900  
52 x 32 1/2 x 79 1/4

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.



# CUBELET Self-Contained

## C-80BAJ




**Mini** 

### Undercounter CUBELET with Built-In Bin

Dimensions: 14 <sup>7</sup>/<sub>8</sub>"W X 22 <sup>5</sup>/<sub>8</sub>"D X 33 <sup>1</sup>/<sub>2</sub>"H  
The ADA compliant machine dimensions are 14<sup>7</sup>/<sub>8</sub>"W x 22<sup>5</sup>/<sub>8</sub>"D x 31<sup>1</sup>/<sub>2</sub>"H

**Self-Contained Bin Storage Capacity Up to 22 Lbs.**

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>C-80BAJ</b>	Air-Cooled	45	80	115V/60/1	17.3	135 Lbs.	<b>\$7,690</b>
<b>C-80BAJ-DS†</b>	Air-Cooled	45	80	115V/60/1	17.3	135 Lbs.	<b>\$7,910</b>
<b>C-80BAJ-AD*</b>	Air-Cooled	45	80	115V/60/1	17.3	135 Lbs.	<b>\$7,710</b>
<b>C-80BAJ-ADDS**†</b>	Air-Cooled	45	80	115V/60/1	17.3	135 Lbs.	<b>\$8,080</b>

**Accessories:** **HS-0229** -DS Door Reversal Part (Available as a Service Part)  
**HS-5061** Drain Pump (Beckett Brand) 1 Year Warranty - Parts & labor (order as accessory) \$890  
**HS-0182** Side Trim Kit \$340  
**HS-2133** 2" Top Spacer Kit available \$250  
**H9320-51** Recommended Water Filtration - Single Configuration \$530





Intertek

UL approved for outdoor use  
 †-DS Models - Wood Door System (Designed to accommodate custom cabinetry)  
 \*ADA compliant

## F-330BAJ-C



**Mini** 

### Undercounter CUBELET with Built-In Bin

Dimensions: 24"W X 26"D X 39"H (6" Legs Included)

**Self-Contained Bin Storage Capacity Up to 80 Lbs.†**

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>F-330BAJ-C</b>	Air-Cooled	214	288	115V/60/1	7.3	178 Lbs.	<b>\$10,870</b>

**Accessories:** **LP-6 LEG** Four 6" Stainless Steel Legs Package available (optional) \$310  
**H9320-51** Recommended Water Filtration - Single Configuration \$530





Four 6" Legs Package (LP-6P LEG) included  
 †Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft<sup>3</sup> average density of ice.

## F-450MAJ-C



**Mini** 

### CUBELET

Ice Machine Dimensions: 22"W X 27 <sup>3</sup>/<sub>8</sub>"D X 22"H





Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>F-450MAJ-C*</b>	Air-Cooled	316	412	115V/60/1	6.10	170 Lbs.	<b>\$9,880</b>


**Accessories:** **H9320-51** Recommended Water Filtration - Single Configuration \$530





\*Not recommended for dispensing applications



30 x 32 1/2 x 55 3/8    22 x 32 1/2 x 68    30 x 32 1/2 x 68    44 x 32 1/2 x 68    48 x 32 1/2 x 68    52 x 32 1/2 x 68  
 Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.




# CUBELET

**F-801M\_J-C**  **CUBELET**

Ice Machine Dimensions: 22"W X 27<sup>3/8</sup>"D X 26"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
F-801MAJ-C*	Air-Cooled	532	690	115V/60/1	5.00	205 Lbs.	<b>\$12,790</b>
F-801MWJ-C	Water-Cooled	580	632	115V/60/1	4.13	205 Lbs.	<b>\$12,670</b>

**Accessories: H9320-51** Recommended Water Filtration - Single Configuration \$530

\*ENERGY STAR qualified

30 x 32 1/2 x 59 3/8    22 x 32 1/2 x 72    30 x 32 1/2 x 72    44 x 32 1/2 x 72    48 x 32 1/2 x 72    52 x 32 1/2 x 72  
 Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

**F-1002M\_J-C**  **CUBELET**

Ice Machine Dimensions: 22"W X 27<sup>3/8</sup>"D X 26"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
F-1002MAJ-C	Air-Cooled	726	890	115V/60/1	4.57	210 Lbs.	<b>\$14,650</b>
F-1002MWJ-C	Water-Cooled	878	770	115V/60/1	3.8	205 Lbs.	<b>\$14,790</b>
F-1002MRJ-C	Remote A-C	680	821	115V/60/1	4.94	210 Lbs.	<b>\$14,880</b>
F-1002MRJZ-C†	Remote A-C	680	821	115V/60/1	4.94	210 Lbs.	<b>\$14,880</b>

**Accessories: H9320-51** Recommended Water Filtration - Single Configuration \$530

Use URC-5F Condenser for Remote Air-Cooled Unit

†Always pair "Z" model ice machines with "Z" model remote condenser.


22 x 32 1/2 x 72    30 x 32 1/2 x 72    44 x 32 1/2 x 72    48 x 32 1/2 x 72    52 x 32 1/2 x 72  
 Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

**F-1501M\_J-C**  **CUBELET**

Ice Machine Dimensions: 30"W X 27<sup>3/8</sup>"D X 34<sup>7/16</sup>"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
F-1501MAJ-C	Air-Cooled	1020	1327	208-230V/60/1	4.61	325 Lbs.	<b>\$19,360</b>
F-1501MWJ-C	Water-Cooled	1218	1376	208-230V/60/1	3.76	330 Lbs.	<b>\$19,480</b>
F-1501MRJ-C	Remote A-C	1125	1335	208-230V/60/1	4.35	325 Lbs.	<b>\$19,210</b>
F-1501MRJZ-C†	Remote A-C	1054	1353	208-230V/60/1	4.50	325 Lbs.	<b>\$19,210</b>

**Accessories: H9320-51** Recommended Water Filtration - Single Configuration \$530

Use URC-14F Condenser for Remote Air-Cooled Unit

†Always pair "Z" model ice machines with "Z" model remote condenser.

30 x 32 1/2 x 79 1/4    44 x 32 1/2 x 79 1/4    48 x 32 1/2 x 79 1/4    52 x 32 1/2 x 79 1/4  
 Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.



# CUBELET

## F-2001MRJ-C



**Medium**



## CUBELET

Ice Machine Dimensions: 30"W x 27 1/2"D x 34 7/16"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>F-2001MRJ-C</b>	Remote A-C	1500	1832	208-230V/60/1	4.35	345 Lbs.	<b>\$25,400</b>
<b>F-2001MRJZ-C†</b>	Remote A-C	1500	1832	208-230V/60/1	4.35	3605 Lbs.	<b>\$25,400</b>

**Accessories: H9320-51** Recommended Water Filtration - Single Configuration \$530





Use URC-22F Condenser for Remote Air-Cooled Unit

†Always pair "Z" model ice machines with "Z" model remote condenser.



B-500  
30 x 32 1/2 x 79 1/4



B-700  
44 x 32 1/2 x 79 1/4



B-800  
48 x 32 1/2 x 79 1/4



B-900  
52 x 32 1/2 x 79 1/4

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

## FD-650M\_J-C



**Small**



## CUBELET

Ice Machine Dimensions: 22"W X 24"D X 26"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>FD-650MAJ-C</b>	Air-Cooled	495	634	115V/60/1	5.5	185 Lbs.	<b>\$11,930</b>
<b>FD-650MWJ-C</b>	Water-Cooled	520	622	115V/60/1	4.02	185 Lbs.	<b>\$12,070</b>
<b>FD-650MRJ-C*</b>	Remote A-C	470	588	115V/60/1	4.95	185 Lbs.	<b>\$11,790</b>
<b>FD-650MRJZ-C*†</b>	Remote A-C	470	588	115V/60/1	4.95	185 Lbs.	<b>\$11,790</b>

**Accessories: H9320-51** Recommended Water Filtration - Single Configuration \$530







Use URC-5F Condenser for Remote Air-Cooled Unit

†Always pair "Z" model ice machines with "Z" model remote condenser.



Lancer  
SENSATION  
30 x 31 x 37 1/4



BD-300  
22 x 24 x 72

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

\*ENERGY STAR qualified

## FD-1002M\_J-C



**Small**



## CUBELET

Ice Machine Dimensions: 22"W X 24"D X 26"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>FD-1002MAJ-C</b>	Air-Cooled	726	890	115V/60/1	4.57	210 Lbs.	<b>\$15,000</b>
<b>FD-1002MRJ-C</b>	Remote A-C	680	821	115V/60/1	4.94	210 Lbs.	<b>\$15,010</b>
<b>FD-1002MRJZ-C†</b>	Remote A-C	680	821	115V/60/1	4.94	210 Lbs.	<b>\$15,010</b>

**Accessories: H9320-51** Recommended Water Filtration - Single Configuration \$530





Use URC-5F Condenser for Remote Air-Cooled Unit

†Always pair "Z" model ice machines with "Z" model remote condenser.



Lancer  
SENSATION  
30 x 31 x 37 1/4





BD-300  
22 x 24 x 72


Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.



# CUBELET Serenity Series

		<b>CUBELET</b>					
		Ice Machine Dimensions: 30"W X 11"D X 26"H					
<b>Model Number</b>	<b>Condenser</b>	<b>Lbs. of Ice per 24 hours</b> 90°A / 70°W   70°A / 50°W		<b>Electrical</b>	<b>kWh per 100 Lbs.</b> 90°A / 70°W   70°A / 50°W	<b>Shipping Weight</b>	<b>List F.O.B. Griffin</b>
<b>FS-1001MLJ-C</b>	Remote A-C	720	851	115V/60/1	5.07   4.29	166 Lbs.	<b>\$13,450</b>
<b>Accessories: H9320-51</b> Recommended Water Filtration - Single Configuration							\$530
							 Lancer SENSATION 30 x 31 x 37 1/4
Use SRC-10J Condenser for Remote Air-Cooled Unit							

		<b>CUBELET</b>					
		Ice Machine Dimensions: 22"W X 16 1/2"D X 26"H					
<b>Model Number</b>	<b>Condenser</b>	<b>Lbs. of Ice per 24 hours</b> 90°A / 70°W   70°A / 50°W		<b>Electrical</b>	<b>kWh per 100 Lbs.</b> 90°A / 70°W   70°A / 50°W	<b>Shipping Weight</b>	<b>List F.O.B. Griffin</b>
<b>FS-1022MLJ-C</b>	Remote A-C	730	889	115V/60/1	5.10   3.93	150 Lbs.	<b>\$15,280</b>
<b>Accessories: H9320-51</b> Recommended Water Filtration - Single Configuration							\$530
							 Lancer SENSATION 30 x 31 x 37 1/4
Use SRC-10J Condenser for Remote Air-Cooled Unit							

		<b>CUBELET</b>					
		Ice Machine Dimensions: 30"W X 16 1/2"D X 34 1/4"H					
<b>Model Number</b>	<b>Condenser</b>	<b>Lbs. of Ice per 24 hours</b> 90°A / 70°W   70°A / 50°W		<b>Electrical</b>	<b>kWh per 100 Lbs.</b> 90°A / 70°W   70°A / 50°W	<b>Shipping Weight</b>	<b>List F.O.B. Griffin</b>
<b>FS-1501MLJ-C</b>	Remote A-C	1125	1386	115V/60/1	4.75   3.67	229 Lbs.	<b>\$16,710</b>
<b>Accessories: H9320-51</b> Recommended Water Filtration - Single Configuration							\$530
							 Lancer SENSATION 30 x 31 x 37 1/4
Use SRC-14J Condenser for Remote Air-Cooled Unit							



# DISPENSER

## Features & Benefits of HOSHIZAKI DCM Dispensers

- Attractive stainless steel exterior provides long life and easy maintenance
- KMEdge dispensers feature a built-in insulated storage bin
- Three dimensional agitation prevents clumping and assists in delivering ice conveniently
- DKM Hotel Dispenser features the industry's only one-piece design and is 35% quieter than other hotel dispensers
- DB Series accommodates KMEdge Series Cubers
- DCM Series dispenses easy to chew cubelet ice and water
- DWM Water Dispenser offers four water choices in a small footprint
- HOSHIZAKI's DCM Opti-Serve™ Series offers hands-free dispensing and helps eliminate the possibility of cross-contamination
- All dispensers feature built-in ice storage capacity

DCM-271BAH		CUBELET Ice & Water Dispenser						
		*Dimensions: 16 5/8" W X 24 1/4"D X 31 3/4"H (4" Legs Included)					Ice Bin Storage Capacity Up to 10 Lbs.†	
	Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
	DCM-271BAH	Air-Cooled	196	257	115V/60/1	6.9	154 Lbs.	\$10,410
		Four 4" Legs included †Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.		 Floor Model with Optional Stand 16 9/16 x 24 1/8 x 66 7/8 W x D x H		 Counter-Top with 4" Legs 16 9/16 x 24 1/8 x 31 11/16 W x D x H		
NOTE: DCM-271BAH is made to pair with SD-271 stand. Placing a DCM-271BAH on SD-270 stand will require a new drain hole to be cut.								

DCM-300BAH		CUBELET Ice & Water Dispenser						
		*Dimensions: 26"W X 22 1/2"D X 40"H					Ice Bin Storage Capacity Up to 40 Lbs.†	
	Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
	DCM-300BAH	Air-Cooled	232	321	115V/60/1	6.84	240 Lbs.	\$13,200
		Unit supplied without legs †Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.		 Counter-Top 26 x 22 1/2 x 40 W x D x H		 Counter-Top with Optional 6" Legs 26 x 22 1/2 x 46 W x D x H		 Floor Model with Optional Stand 26 x 22 1/2 x 72 1/2 W x D x H

DCM-500B_H		CUBELET Ice & Water Dispenser						
		*Dimensions: 26"W X 22 1/2"D X 40"H					Ice Bin Storage Capacity Up to 40 Lbs.†	
	Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
	DCM-500BAH DCM-500BWH	Air-Cooled Water-Cooled	450 512	618 590	115V/60/1 115V/60/1	5.62 4.48	255 Lbs. 255 Lbs.	\$16,770 \$16,910
		Unit supplied without legs †Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.		 Counter-Top 26 x 22 1/2 x 40 W x D x H		 Counter-Top with Optional 6" Legs 26 x 22 1/2 x 46 W x D x H		 Floor Model with Optional Stand 26 x 22 1/2 x 72 1/2 W x D x H

\*Includes Ice Machine & Dispenser Dimensions



# DISPENSER

DCM-75_B_H		CUBELET Ice & Water Dispenser							
		*Dimensions: 34 1/16" W X 28 1/2" D X 48 1/16" H					Ice Bin Storage Capacity Up to 95 Lbs.†		
	Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F. O. B. Griffin	
	<b>DCM-752BAH</b>	Air-Cooled	576	782	115V/60/1	5.10	345 Lbs.	<b>\$21,940</b>	
	<b>DCM-751BWH</b>	Water-Cooled	678	782	115V/60/1	4.76	345 Lbs.	<b>\$22,350</b>	
		Unit supplied without legs †Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft <sup>3</sup> average density of ice.					<b>Counter-Top</b> 26 x 22 1/2 x 40 W x D x H	<b>Counter-Top with Optional 6" Legs</b> 26 x 22 1/2 x 46 W x D x H	<b>Floor Model with Optional Stand</b> 26 x 22 1/2 x 72 1/2 W x D x H

\*Includes Ice Machine & Dispenser Dimensions

## DCM DISPENSERS ACCESSORIES

Model Number	Description	For Use With	List F. O. B. Griffin
<b>LP-4 LEG</b>	Four 4" Stainless Steel Legs Package available (optional)	DCM-271 BAH	<b>\$280</b>
<b>LP-6 LEG</b>	Four 6" Stainless Steel Legs Package available	DCM-300 BAH, DCM-500 BAH, DCM-75_B_H	<b>\$310</b>
<b>LP-6P LEG</b>	Four 6" Painted Legs Package available	DCM-300 BAH, DCM-500 BAH, DCM-75_B_H	<b>\$290</b>
<b>SD-271</b>	Equipment Stand	DCM-271 BAH	<b>\$1,730</b>
<b>SD-500</b>	Equipment Stand	DCM-300 BAH, DCM-500 BAH	<b>\$1,910</b>
<b>SD-750</b>	Equipment Stand	DCM-75_B_H	<b>\$2,360</b>
<b>HS-2066</b>	Seismic Wall Mount Kit	DCM-300 BAH, DCM-500 BAH	<b>\$260</b>
<b>HS-2067</b>	Seismic Wall Mount Kit	DCM-75_B_H	<b>\$330</b>
<b>HS-2070</b>	Seismic Wall Mount Kit	DCM-271 BAH	<b>\$250</b>
<b>HS-2071</b>	Leg Seismic Kit	DCM-300 BAH, DCM-500 BAH	<b>\$670</b>
<b>HS-2072</b>	Leg Seismic Kit	DCM-75_B_H	<b>\$610</b>
<b>HS-2104</b>	Wall Mount Kit	DCM-271 BAH	<b>\$1,130</b>
<b>HS-5554</b>	Small Square Anti-Microbial Cover (30 mm x 30 mm)	DCM-271 BAH	<b>\$40</b>
<b>HS-5559</b>	Round Anti-Microbial Cover (25 mm diameter)	DCM-300 BAH, DCM-500 BAH, DCM-75_B_H	<b>\$80</b>
<b>H9320-51</b>	Recommended Water Filtration - Single Configuration	DCM-271 BAH, DCM-300 BAH, DCM-500 BAH, DCM-75_B_H	<b>\$530</b>
<b>H9320-54</b>	4H-SI Water Filter Hoshizaki Healthcare Filtration System - Single Configuration	DCM-271 BAH, DCM-300 BAH, DCM-500 BAH, DCM-75_B_H	<b>\$570</b>
<b>H9655-08</b>	4H-SI Water Filter Hoshizaki Healthcare Filtration System - Cartridge (1 pk)	DCM-271 BAH, DCM-300 BAH, DCM-500 BAH, DCM-75_B_H	<b>\$400</b>



# DISPENSER

## DCM-271BAH-OS



### CUBELET Ice & Water Dispenser

Hands-free sensor designed for use with opaque containers. Not intended for outdoor use - avoid placement in direct sunlight.


\*Dimensions: 16 5/8" W X 24 1/4" D X 31 3/4" H (4" Legs Included)

Ice Bin Storage Capacity  
Up to 10 Lbs.†

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
DCM-271BAH-OS	Air-Cooled	196	257	115V/60/1	6.9	154 Lbs.	\$10,530



Four 4" Legs included  
†Rated in accordance with AHRI Standard 820(I-P).  
Capacity based on 100% of total volume x 30 lb/ft<sup>3</sup> average density of ice.



## DCM-300BAH-OS



### CUBELET Ice & Water Dispenser

Hands-free sensor designed for use with opaque containers. Not intended for outdoor use - avoid placement in direct sunlight.

\*Dimensions: 26" W X 22 1/2" D X 40" H



Ice Bin Storage Capacity  
Up to 40 Lbs.†

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
DCM-300BAH-OS	Air-Cooled	232	321	115V/60/1	6.84	240 Lbs.	\$13,570



Unit supplied without legs  
†Rated in accordance with AHRI Standard 820(I-P).  
Capacity based on 100% of total volume x 30 lb/ft<sup>3</sup> average density of ice.

On a counter without legs or on a stand



## DCM-500B\_H-OS



### CUBELET Ice & Water Dispenser

Hands-free sensor designed for use with opaque containers. Not intended for outdoor use - avoid placement in direct sunlight.

\*Dimensions: 26" W X 22 1/2" D X 40" H


Ice Bin Storage Capacity  
Up to 40 Lbs.†

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
DCM-500BAH-OS	Air-Cooled	450	618	115V/60/1	5.62	276 Lbs.	\$16,910
DCM-500BWH-OS	Water-Cooled	512	590	115V/60/1	4.48	255 Lbs.	\$17,030



Unit supplied without legs  
†Rated in accordance with AHRI Standard 820(I-P).  
Capacity based on 100% of total volume x 30 lb/ft<sup>3</sup> average density of ice.

On a counter without legs or on a stand



## DCM-75\_B\_H-OS



### CUBELET Ice & Water Dispenser

Hands-free sensor designed for use with opaque containers. Not intended for outdoor use - avoid placement in direct sunlight.

\*Dimensions: 34 1/16" W X 28 1/2" D X 48 1/16" H

Ice Bin Storage Capacity  
Up to 95 Lbs.†

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
DCM-752BAH-OS	Air-Cooled	576	782	115V/60/1	5.10	345 Lbs.	\$22,070
DCM-751BWH-OS	Water-Cooled	678	782	115V/60/1	4.76	345 Lbs.	\$22,480



Unit supplied without legs  
†Rated in accordance with AHRI Standard 820(I-P).  
Capacity based on 100% of total volume x 30 lb/ft<sup>3</sup> average density of ice.


On a counter without legs or on a stand



\*Includes Ice Machine & Dispenser Dimensions



# DISPENSER

		<b>KMEdge DB Dispenser</b>					
		Ice Machine/Dispenser Dimensions: 22"W X 30"D X 53"H (6" Legs Included)					
		Model Number	Application Ice Storage Capacity	Dispensing Rate	Electrical	Icemaker kWh per 100 lbs.	Shipping Weight
<b>DB-130H</b>	130 Lbs.	20 lbs. / min.	115V/60/1	N/A	195 Lbs.	<b>\$7,340</b>	
  		Four Painted 6" Flange Legs included Note: 90 Day Warranty on accessory parts Ice dispensing area is ADA compliant Only dispenses crescent ice				 22 x 30 x 53 W x D x H	 <b>KM-350/520/660M</b> Cuber sold separately 22 x 30 x 81 W x D x H

		<b>KMEdge DB Dispenser</b>					
		Ice Machine/Dispenser Dimensions: 30"W X 30"D X 53"H (6" Legs Included)					
		Model Number	Application Ice Storage Capacity	Dispensing Rate	Electrical	Icemaker kWh per 100 lbs.	Shipping Weight
<b>DB-200H</b>	200 Lbs.	13 lbs. / min.	115V/60/1	N/A	<b>220 Lbs.</b>	<b>\$8,420</b>	
  		Four Painted 6" Flange Legs included Note: 90 Day Warranty on accessory parts Ice dispensing area is ADA compliant Only dispenses crescent ice				 30 x 30 x 53 W x D x H	 <b>KML-700</b> Cuber sold separately 30 x 30 x 79 W x D x H

		<b>KMEdge DKM Dispenser</b>						
		Ice Machine/Dispenser Dimensions: 30"W X 28"D X 77"H (6" Legs Included)						
		Model Number	Lbs. of Ice per 24 hours 70°F / 50°F	Application Ice Storage Capacity	Dispensing Rate	Electrical	Icemaker kWh per 100 lbs.	Shipping Weight
<b>DKM-500BAJ*</b>	545 Lbs.	200 Lbs.	13 lbs. / min.	115V/60/1	5.56	300 Lbs.	<b>\$17,100</b>	
<b>DKM-500BWJ</b>	540 Lbs.	200 Lbs.	13 lbs. / min.	115V/60/1	4.79	310 Lbs.	<b>\$17,250</b>	
    		Rated in accordance with AHRI Standard 80		Four Painted 6" Flange Legs included DKM-500B - Ice dispensing area is ADA compliant				
*ENERGY STAR qualified								

## DCM-OS, DB & DKM - DISPENSERS ACCESSORIES

Model Number	Description	For Use With	List F.O.B. Griffin
<b>LP-4 LEG</b>	Four 4" Stainless Steel Legs Package available (optional)	DCM-271BAH-OS	<b>\$280</b>
<b>LP-6 LEG</b>	Four 6" Stainless Steel Legs Package available	DCM-300BAH-OS, DCM-500BAH-OS, DCM-75_B_H-OS, DB-200H	<b>\$310</b>
<b>LP-6P LEG</b>	Four 6" Painted Legs Package available	DCM-300BAH-OS, DCM-500BAH-OS, DCM-75_B_H-OS	<b>\$290</b>
<b>LP-6 FLANGE LEG</b>	Four 6" Stainless Steel Legs Package available	DB-130H	<b>\$360</b>
<b>SD-271</b>	Equipment Stand	DCM-271BAH-OS	<b>\$1,730</b>
<b>SD-500</b>	Equipment Stand	DCM-300BAH-OS, DCM-500BAH-OS	<b>\$1,910</b>
<b>SD-750</b>	Equipment Stand	DCM-75_B_H-OS	<b>\$2,360</b>
<b>HS-2036</b>	Top Kit for KM-350M, KM-520M or KM-660M	DB-200H	<b>\$280</b>
<b>HS-2066</b>	Seismic Wall Mount Kit	DCM-300BAH-OS, DCM-500BAH-OS	<b>\$260</b>
<b>HS-2067</b>	Seismic Wall Mount Kit	DCM-75_B_H-OS	<b>\$330</b>
<b>HS-2070</b>	Seismic Wall Mount Kit	DCM-271 BAH-OS	<b>\$250</b>
<b>HS-2071</b>	Leg Seismic Kit	DCM-300BAH-OS, DCM-500BAH-OS	<b>\$670</b>
<b>HS-2072</b>	Leg Seismic Kit	DCM-75_B_H-OS	<b>\$610</b>
<b>HS-2104</b>	Wall Mount Kit	DCM-271BAH-OS	<b>\$1,130</b>
<b>HS-2109</b>	Chute & grill replacement kit	DB-130H, DB-200H	<b>\$450</b>
<b>HS-3586</b>	6" Casters - Set of 4	6" Casters - Set of 4	<b>\$630</b>
<b>H9320-51</b>	Recommended Water Filtration - Single Configuration	DCM-300BAH-OS, DCM-500BAH-OS, DCM-75_B_H-OS, DKM-500BAJ	<b>\$530</b>



# DISPENSER

<b>DM-200B</b>		<b>KMEdge Ice &amp; Water Dispenser</b>					
		Dispenser Dimensions: 30"W X 28"D X 36 3/8"H					
<b>Model Number</b>	<b>Application Ice Storage Capacity</b>	<b>Dispensing Rate</b>	<b>Electrical</b>	<b>Icemaker Production per 24 hrs.</b>	<b>Icemaker kWh per 100 lbs.</b>	<b>Shipping Weight</b>	<b>List F. O. B. Griffin</b>
DM-200B	200 lbs.	7.5 lbs. / min.	115-120V/60/1	N/A	N/A	210 Lbs.	<b>\$8,670</b>
<b>Accessories:</b> HS-2036 Top Kit for KM-350M, KM-520M or KM-660M \$280 DM Legs Four 4" Black Die Cast Legs Kit \$240 SD-200 Equipment Stand \$2,340							
  		 Counter-Top 30 x 28 x 36 3/8 W x D x H		 Counter-Top with optional 4" legs 30 x 28 x 40 3/8 W x D x H			
Unit supplied without legs Only dispenses crescent ice							

<b>DM-4420N</b>		<b>CUBELET Ice &amp; Water Dispenser</b>					
		Dimensions: 22"W X 30 1/2"D X 40"H					
<b>Model Number</b>	<b>Application Ice Storage Capacity</b>	<b>Dispensing Rate</b>	<b>Electrical</b>	<b>Icemaker Production per 24 hrs.</b>	<b>Icemaker kWh per 100 lbs.</b>	<b>Shipping Weight</b>	<b>List F. O. B. Griffin</b>
DM-4420N	200 lbs.	N/A	115-120V/60/1	N/A	N/A	235 Lbs.	<b>\$9,000</b>
<b>Accessories:</b> HS-5329 Top Kit for for FS-1022MLJ-C \$200 HS-5330 Top Kit for for FD-650M_J-C & FD-1002M_J-C \$550							
  		CANADIAN ENERGY PERFORMANCE VERIFIED RENDEMENT ENERGETIQUE VERIFIED					

<b>DWM-20A</b>		<b>MODwater Water Dispenser</b>																		
		Dimensions: 14 7/8"W x 21 3/8"D x 16 5/8"H																		
<b>Model Number</b>	<b>Max Draw of Chilled Water (Chilled or Sparkling)</b>	<b>Max Flow Rate (Chilled)</b>	<b>Heat Rejection</b>	<b>Refrigerant Type/Charge</b>	<b>Max. Fuse Size or HACR Circuit Breaker</b>	<b>Max Amps</b>	<b>Voltage</b>	<b>Shipping Weight</b>	<b>List F. O. B. Griffin</b>											
DWM-20A	20 gal/hour	0.9 gal/min	450W	R-134a/ 4.23 oz	15A	9A	120V/60/1	90 Lbs.	<b>\$6,490</b>											
<b>Accessories:</b> HS-5441 Replacement All-in-One Filter Cartridge, HS-5441 (pack of 2) \$410 HS-5442 Replacement Alkaline Chamber \$430 HS-5504 6-Month Replacement Kit: Filters (2 ea.) alkaline chamber, air filter, nozzle tip w/aerator \$850 HS-5542 DWM Top Kit for SD-271 \$230 HS-5560 Large Square Anti-Microbial Cover (50 mm x 50 mm) \$70 Installation kit included CO <sub>2</sub> tank must be sourced from other vendor																				
  		<b>TYPES OF WATER DISPENSED</b> <table border="1"> <tr> <td>Chilled</td> <td>Temp.</td> <td>34°-36°F</td> </tr> <tr> <td>Sparkling</td> <td>Carbonation</td> <td>3.7 Vol.</td> </tr> <tr> <td>Alkaline</td> <td>pH (avg.)</td> <td>8.0-9.0</td> </tr> <tr> <td>Hot</td> <td>Factory set</td> <td>185°F</td> </tr> </table>							Chilled	Temp.	34°-36°F	Sparkling	Carbonation	3.7 Vol.	Alkaline	pH (avg.)	8.0-9.0	Hot	Factory set	185°F
Chilled	Temp.	34°-36°F																		
Sparkling	Carbonation	3.7 Vol.																		
Alkaline	pH (avg.)	8.0-9.0																		
Hot	Factory set	185°F																		



# ICE STORAGE BINS

**HOSHIZAKI Ice Storage Bins** are available with stainless steel exterior for easy cleaning and long-lasting attractive appearance. Sturdy construction for side-by-side or stacked installations and non-corrosive bin liner provide safe, sanitary storage of cubed or flaked ice. Foamed-in-place polyurethane insulation in all bin walls and bottom provides dependable ice storage. H-GUARD Plus® Antimicrobial Agent adds extra protection to the ice scoop (included).



Intertek

<b>B-250SF</b>		Model Number	Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight	List F.O.B. Griffin	
		<b>B-250SF</b>	Stainless Steel	250 Lbs.	30" x 32 <sup>1/2</sup> " x 33 <sup>3/8</sup> "	110 Lbs.	<b>\$2,450</b>	
	<b>Accessories</b>							
			<b>LP-6 LEG</b> Four 6" Stainless Steel Legs Package available				\$310	
		<b>HS-2033</b> Order 8" Top Kit to accommodate 22"W ice machines					\$310	
		<b>HS-5429</b> Bin Door Catch					\$55	
		<b>HS-5607</b> Optional Bin Scoop Holder					\$140	
		Four 6" Painted Legs included Refer to Top Kit Matrix for necessary configurations						
<b>B-300SF BD-300SF**</b>		Model Number	Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight	List F.O.B. Griffin	
		<b>B-300SF</b>	Stainless Steel	300 Lbs.	22" x 32 <sup>1/2</sup> " x 46"	125 Lbs.	<b>\$2,530</b>	
	<b>Accessories</b>							
			<b>LP-6 FLANGE LEG</b> Four 6" Stainless Steel Flange Legs Package available				\$360	
			<b>HS-5429</b> Bin Door Catch				\$55	
			<b>HS-5607</b> Optional Bin Scoop Holder				\$140	
		Four 6" Painted Flanged Legs included Refer to Top Kit Matrix for necessary configurations						
		<b>Model Number</b>	<b>Exterior Finish</b>	<b>Application Ice Storage Capacity</b>	<b>Dimensions W x D x H (Height includes 6" legs)</b>	<b>Shipping Weight</b>	<b>List F.O.B. Griffin</b>	
		<b>BD-300SF</b>	Stainless Steel	300 Lbs.	22" x 32 <sup>1/2</sup> " x 46"	135 Lbs.	<b>\$2,580</b>	
<b>Accessories</b>								
		<b>LP-6 FLANGE LEG</b> Four 6" Stainless Steel Flange Legs Package available				\$360		
		<b>HS-5429</b> Bin Door Catch				\$55		
		<b>HS-5607</b> Optional Bin Scoop Holder				\$140		
		For use with <b>KMD-410M, KMS-822M, FD-650M-C, FD-1001M-C</b> <b>**BD Bins fit 24" to 24 1/2" deep Ice Machines without Top Kit extension</b>						
<b>B-500SF BD-500SF**</b>		Model Number	Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight	List F.O.B. Griffin	
		<b>B-500SF</b>	Stainless Steel	500 Lbs.	30" x 32 <sup>1/2</sup> " x 46"	140 Lbs.	<b>\$2,820</b>	
	<b>Accessories</b>							
			<b>LP-6 LEG</b> Four 6" Stainless Steel Legs Package available				\$310	
			<b>HS-2033</b> Order 8" Top Kit to accommodate 22"W ice machines				\$310	
			<b>HS-2129</b> Top Kit: KMD application				\$360	
			<b>HS-5429</b> Bin Door Catch				\$55	
		<b>HS-5607</b> Optional Bin Scoop Holder				\$140		
		Four 6" Painted Legs included Refer to Top Kit Matrix for necessary configurations						
		<b>Model Number</b>	<b>Exterior Finish</b>	<b>Application Ice Storage Capacity</b>	<b>Dimensions W x D x H (Height includes 6" legs)</b>	<b>Shipping Weight</b>	<b>List F.O.B. Griffin</b>	
		<b>BD-500SF</b>	Stainless Steel	500 Lbs.	30" x 32 <sup>1/2</sup> " x 46"	155 Lbs.	<b>\$2,900</b>	
<b>Accessories</b>								
		<b>LP-6 LEG</b> Four 6" Stainless Steel Legs Package available				\$310		
		For use with <b>KMD-460M, KMD-530M, KMD-860M</b> <b>**BD Bins fit 24" to 24 1/2" deep Ice Machines without Top Kit extension</b>						
		Four 6" Painted Legs included						



# ICE STORAGE BINS

<b>B-700SF</b>	<b>Model Number</b>	<b>Exterior Finish</b>	<b>Application Ice Storage Capacity</b>	<b>Dimensions W x D x H (Height includes 6" legs)</b>	<b>Shipping Weight</b>	<b>List F.O.B. Griffin</b>
	<b>B-700SF</b>	Stainless Steel	700 Lbs.	44" x 32 <sup>1/2</sup> " x 46"	175 Lbs.	<b>\$3,550</b>
	<b>Accessories</b> <b>LP-6 LEG</b> Four 6" Stainless Steel Legs Package available \$310 <b>HS-2035</b> Order 22" Top Kit to accommodate 22"W ice machines \$330 <b>HS-2034</b> Order 14" Top Kit to accommodate 30"W ice machines \$310 <b>HS-2130</b> Top Kit: KMD application \$430 <b>HS-5429</b> Bin Door Catch \$55 <b>HS-5607</b> Optional Bin Scoop Holder \$140 Four 6" Painted Legs included Refer to Top Kit Matrix for necessary configurations					

<b>B-800SF</b>	<b>Model Number</b>	<b>Exterior Finish</b>	<b>Application Ice Storage Capacity</b>	<b>Dimensions W x D x H (Height includes 6" legs)</b>	<b>Shipping Weight</b>	<b>List F.O.B. Griffin</b>
	<b>B-800SF</b>	Stainless Steel	800 Lbs.	48" x 32 <sup>1/2</sup> " x 46"	185 Lbs.	<b>\$3,830</b>
	<b>Accessories</b> <b>LP-6 LEG</b> Four 6" Stainless Steel Legs Package available \$310 <b>HS-2035</b> 22" Top Kit & <b>HS-2032 - 4"</b> Top Kit to accommodate 22"W ice machines \$610 <b>HS-2032</b> 4" Top Kit to accommodate (2) 22"W ice machines \$280 <b>HS-2034</b> Order 14" Top Kit & <b>HS-2032 - 4"</b> Top Kit to accommodate 30"W machines \$590 <b>HS-2131</b> Top Kit: KMD application \$510 <b>HS-5429</b> Bin Door Catch \$55 <b>HS-5607</b> Optional Bin Scoop Holder \$140 Four 6" Painted Legs included Refer to Top Kit Matrix for necessary configurations					

<b>B-900SF</b>	<b>Model Number</b>	<b>Exterior Finish</b>	<b>Application Ice Storage Capacity</b>	<b>Dimensions W x D x H (Height includes 6" legs)</b>	<b>Shipping Weight</b>	<b>List F.O.B. Griffin</b>
	<b>B-900SF</b>	Stainless Steel	900 Lbs.	52" x 32 <sup>1/2</sup> " x 46"	195 Lbs.	<b>\$4,010</b>
	<b>Accessories</b> <b>LP-6 LEG</b> Four 6" Stainless Steel Legs Package available \$310 <b>HS-2035</b> Order 22" Top Kit to accommodate 30"W ice machines \$330 <b>HS-2035</b> 22" Top Kit & <b>HS-2033 - 8"</b> Top Kit to accommodate 22"W ice machines \$640 <b>HS-2033</b> 8" Top Kit to accommodate (2) 22"W machines \$310 <b>HS-2032</b> 4" Top Kit to accommodate 48"W ice machines \$280 <b>HS-2132</b> Top Kit: KMD application \$620 <b>HS-5429</b> Bin Door Catch \$55 <b>HS-5607</b> Optional Bin Scoop Holder \$140 Four 6" Painted Legs included Refer to Top Kit Matrix for necessary configurations					

<b>B-1150SS / B-1300SS</b>	<b>Model Number</b>	<b>Exterior Finish</b>	<b>Application Ice Storage Capacity</b>	<b>Dimensions W x D x H (Height includes 6" legs)</b>	<b>Shipping Weight</b>	<b>List F.O.B. Griffin</b>
	<b>B-1150SS</b>	Stainless Steel	1148 Lbs.	48" x 41" x 60"	315 Lbs.	<b>\$8,120</b>
	<b>B-1300SS</b>	Stainless Steel	1304 Lbs.	48" x 41" x 66"	330 Lbs.	<b>\$8,400</b>
Four 6" Stainless Steel Legs included, baffle design increases ice accessibility by 30% Universal top included - Check Top Kit Application Guide for detail						

<b>B-1500SS / B-1650SS</b>	<b>Model Number</b>	<b>Exterior Finish</b>	<b>Application Ice Storage Capacity</b>	<b>Dimensions W x D x H (Height includes 6" legs)</b>	<b>Shipping Weight</b>	<b>List F.O.B. Griffin</b>
	<b>B-1500SS</b>	Stainless Steel	1500 Lbs.	60" x 41" x 62"	360 Lbs.	<b>\$9,160</b>
	<b>B-1650SS</b>	Stainless Steel	1605 Lbs.	60" x 41" x 66"	375 Lbs.	<b>\$9,470</b>
Four 6" Stainless Steel Legs included, baffle design increases ice accessibility by 30% Universal top included - Check Top Kit Application Guide for detail						



# DISPENSER STANDS

<b>SD STANDS</b> DM and DCM Series Dispensers	Model Number	Use with Ice Machine / Dispenser Model	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight	List F.O.B. Griffin
	<b>SD-200</b>	DM-200B	30" x 28" x 32 <sup>13/16"</sup>	105 lbs.	<b>\$2,340</b>
	<b>SD-271</b>	DCM-271 (-OS)	16 <sup>1/2"</sup> x 24" x 35 <sup>3/16"</sup>	85 lbs.	<b>\$1,730</b>
	<b>SD-500</b>	DCM-300 (-OS) / DCM-500 (-OS)	25 <sup>7/8"</sup> x 22" x 32 <sup>3/4"</sup>	90 lbs.	<b>\$1,910</b>
	<b>SD-750</b>	DCM-751 (-OS) / DCM-752 (-OS)	34" x 28" x 32 <sup>3/4"</sup>	110 lbs.	<b>\$2,360</b>
<b>Accessories</b>					
<b>LP-6 FLANGE LEG</b> Four 6" Stainless Steel Flange Legs Package available (optional)					\$360
Leg Kits: <b>HS-2066</b> Seismic Kit for SD 500 Stands					\$260
<b>HS-2071</b> Leg Seismic Kit SD 500 Stands					\$670
Four 6" Painted Legs included					
NOTE: DCM-271BAH is made to pair with SD-271 stand. Placing a DCM-271BAH on SD-270 stand will require a new drain hole to be cut.					



- Heavy duty stands for floor model ice machines/dispensers
- Easy cleaning and maintenance
- Attractive stainless steel exterior
- Locking doors standard



# TOP KIT MATRIX

	<b>22" Width</b> KM-350M KM-520M KM-660M F-450M F-801M F-1002M	<b>22" Width</b> KMD-410M† KMS-822M FD-650M-C† FD-1002M-C	<b>30" Width</b> KM-901M KM-1340M KM-1601M KML Series F-1501M F-2001	<b>30" Width</b> KMD-460M‡ KMD-530M‡ KMD-860M‡ KMS-1402M* KMS-2000M*	<b>44" Width</b> 2 KM-350M 2 KM-520M 2 KM-660M IM-500S 2 F-450M 2 F-801M 2 F-1002M	<b>44" Width</b> 2 KMD-410M 2 FD-650M-C 2 FD-1002M-C	<b>48" Width</b> KM-1301S KM-1400S KM-1601S KM-1900S KM-2200S KM-2600S	<b>60" Width</b> 2 KM-901M 2 KM-1100M 2 KM-1340M 2 KM-1601M 2 KML Series 2 F-1501/2001M 2 KMD Series**
<b>22" Width</b> B-300SF DB-130H	N/A	HS-2153 HS-5424 <i>(KMD-410 on B-300 only)</i>	N/A	N/A	N/A	N/A	N/A	N/A
<b>BD-300SF†</b>	N/A	—	N/A	N/A	N/A	N/A	N/A	N/A
<b>30" Width</b> B-250SF B-500SF	HS-2033	HS-2033 & HS-2129	—	HS-2129	N/A	N/A	N/A	N/A
<b>BD-500SF†</b>	N/A	N/A	N/A	— <i>(Only fits KMD Units)</i>	N/A	N/A	N/A	N/A
<b>44" Width</b> B-700SF	HS-2035	HS-2035 & HS-2130	HS-2034	HS-2130 & HS-2034	—	HS-2130 <i>(KMD-410M does not apply.)</i>	N/A	N/A
<b>48" Width</b> B-800SF	HS-2035 & HS-2032	HS-2035, HS-2032 & HS-2131	HS-2034 & HS-2032	HS-2131, HS-2034 & HS-2032	HS-2032	HS-2032 & HS-2131	—	N/A
<b>48" Width</b> B-1150SS B-1300SS	UNIVERSAL TOP KIT INCLUDED	N/A	UNIVERSAL TOP KIT INCLUDED	UNIVERSAL TOP KIT INCLUDED & HS-2147	IM & F UNITS ONLY <i>(HS-5397 for IM-500)</i>	N/A	UNIVERSAL TOP KIT INCLUDED	N/A
<b>52" Width</b> B-900SF	HS-2035 & HS-2033	HS-2035 & HS-2033/2132	HS-2035	HS-2132 & HS-2035	HS-2033	HS-2033 & HS-2132	HS-2032	N/A
<b>60" Width</b> B-1500SS B-1650SS	N/A	N/A	UNIVERSAL TOP KIT INCLUDED & HS-2111	N/A	UNIVERSAL TOP KIT INCLUDED <i>(HS-5397 for IM-500)</i>	N/A	UNIVERSAL TOP KIT INCLUDED	UNIVERSAL TOP KIT INCLUDED
<b>30" Width</b> DB-200H DM-200B	HS-2036 <i>(Only fits KM Units)</i>	N/A	— <i>(Only fits KML Units)</i>	N/A	N/A	N/A	N/A	N/A

— Not top kit necessary | N/A Combination of ice maker and bin is not possible

\*Except KMD-410M (See 22" Wide), †BD Bins Fit 24" to 24 1/2" Deep Ice makers w/o Top Kit, ‡HS-5065 Req'd for Air Cooled KMD-460/530MAJ

## KMS<sup>§</sup>, KMD, or FD on Bin Need Top Kit Extension:

Model Number	For Use With	List F.O.B. Griffin
HS-2129	B-500 Bins	\$360
HS-2130	B-700 Bins	\$430
HS-2131	B-800 Bins	\$510
HS-2132	B-800 & B-900 Bins	\$620
HS-2147	B-1150 & 1300 Bins	\$330
HS-2153	B-300 Bins	\$240
HS-5424	KMD on DB-130	\$110

§Except KMS-1122MLJ

36" Width - KMH-2100S - Fit Kloppenberg Bins Only (Sold Separately)


Model Number	Description	List F.O.B. Griffin
HS-2032	4" ABS Top Kit	\$280
HS-2033	8" ABS Top Kit	\$310
HS-2034	14" ABS Top Kit	\$310
HS-2035	22" ABS Top Kit	\$330
HS-2036	(2) 4" ABS Top Kits for KM on DB-200H	\$280
HS-2111	11.3" x 26.2" Stainless Cover/Separator	FREE
HS-2148	30" x 3.1" Stainless Cover	\$260
HS-5065	Front Panel Filter Kit for KMD-460/530M	\$770
HS-5397	Bin Control Kit for IM-500 on B-1150/1300/1500/1650	\$280



# REMOTE CONDENSER

## AIR-COOLED REMOTE CONDENSERS - URC / SRC / SRK

An Ice Machine with a **Remote Air Condenser** provides quiet operation at the icemaker location, improves efficiency, and saves energy with cooler operation. Sturdy construction and weather-resistant cabinet finish provides long life operation. Remote condensers may be installed outdoors up to 55 feet from the icemaker. For installations exceeding 55 feet, contact a Factory Technical Service Representative at 800-233-1940.

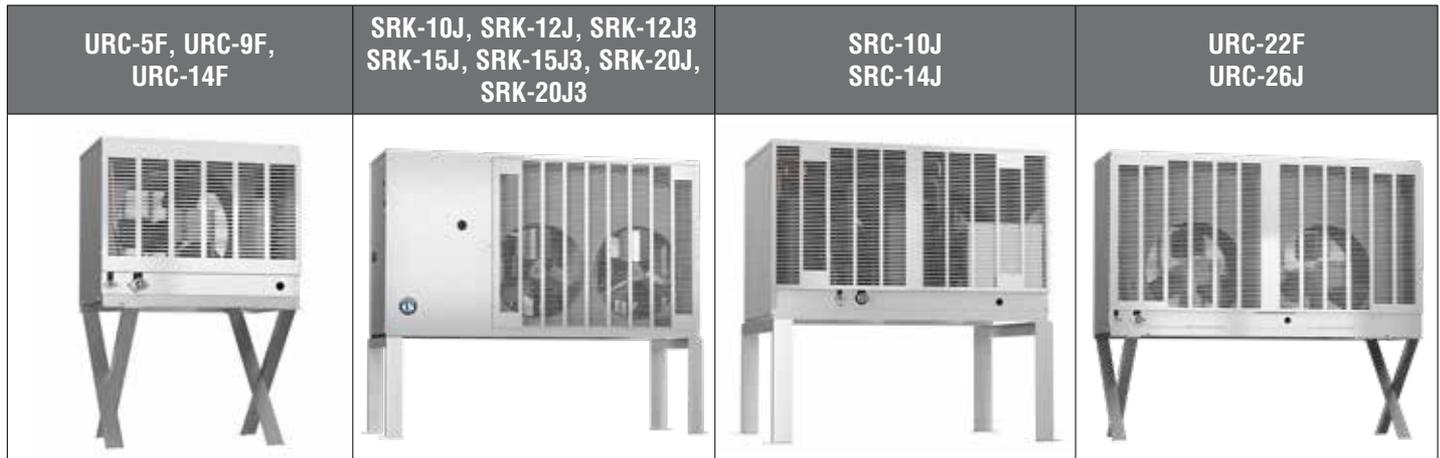

Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight	List F.O.B. Griffin
<b>URC-5F</b>	KM-520MRJ, KMD-530MRJ, KM-660MRJ, FD-650MRJ-C, FD-1002MRJ-C, F-1002MRJ(-C)	115/60/1	21 <sup>15/16</sup> " x 14 <sup>1/8</sup> " x 32 <sup>13/16</sup> "	60 Lbs.	<b>\$2,050</b>
<b>Accessories</b>					
Tubing Kit: <b>R404-2046-2</b> - 20' Pre-charged R-404A					\$560
<b>R404-3546-2</b> - 35' Pre-charged R-404A					\$730
<b>HS-2150</b> - Quick-Connect Kit (not required if line set is ordered)					\$290

Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight	List F.O.B. Griffin
<b>URC-9F</b>	KML-700MRJ, KMD-860MRJ	115/60/1	35 <sup>11/16</sup> " x 14 <sup>1/16</sup> " x 36 <sup>1/2</sup> "	95 Lbs.	<b>\$2,420</b>
<b>Accessories</b>					
Tubing Kit: <b>R404-2068-2</b> - 20' Pre-charged R-404A					\$560
<b>R404-3568-2</b> - 35' Pre-charged R-404A					\$730
<b>R404-5568-2</b> - 55' Pre-charged R-404A					\$920
<b>HS-2150</b> - Quick-Connect Kit (not required if line set is ordered)					\$290

Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight	List F.O.B. Griffin
<b>SRC-10J</b>	FS-1001MLJ-C, FS-1022MLJ-C	230/60/1	38" x 29" x 37"	270 Lbs.	<b>\$5,280</b>
<b>Accessories</b>					
Tubing Kit: <b>HS-5299</b> - 25' Brazing Required R-404A					\$560
<b>HS-5300</b> - 35' Brazing Required R-404A					\$720
<b>HS-5301</b> - 55' Brazing Required R-404A					\$890

Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight	List F.O.B. Griffin
<b>SRK-10J</b>	KMS-822MLJ	230/60/1 **	38" x 29" x 37"	226 Lbs.	<b>\$6,120</b>
<b>Accessories</b>					
Tubing Kit: <b>HS-0250</b> - 25' Brazing Required R-404A					\$560
<b>HS-0251</b> - 35' Brazing Required R-404A					\$720
<b>HS-0252</b> - 55' Brazing Required R-404A					\$890

\*\*3 wire with neutral for 115V



# REMOTE CONDENSER

Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight	List F.O.B. Griffin
<b>SRK-12J</b>	KMS-1122MLJ	230/60/1**	50" x 19 <sup>1/2</sup> " x 43"	273 Lbs.	<b>\$6,790</b>
<b>SRK-12J3</b>	KMS-1122MLJ	230/60/3	50" x 19 <sup>1/2</sup> " x 43"	273 Lbs.	<b>\$7,060</b>
<b>Accessories</b>					
Tubing Kit: <b>HS-0250</b> - 25' Brazing Required R-404A					\$560
<b>HS-0251</b> - 35' Brazing Required R-404A					\$720
<b>HS-0252</b> - 55' Brazing Required R-404A					\$890
**3 wire with neutral for 115V					

Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight	List F.O.B. Griffin
<b>SRC-14J</b>	FS-1501MLJ-C	230/60/1	37 <sup>3/4</sup> " x 26 <sup>5/8</sup> " x 37"	235 Lbs.	<b>\$6,540</b>
<b>Accessories</b>					
Tubing Kit: <b>HS-5323</b> - 25' Brazing Required R-404A					\$560
<b>HS-5324</b> - 35' Brazing Required R-404A					\$720
<b>HS-5325</b> - 55' Brazing Required R-404A					\$890

Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight	List F.O.B. Griffin
<b>SRK-15J</b>	KMS-1402MLJ	230/60/1**	50" x 19 <sup>1/2</sup> " x 43"	275 Lbs.	<b>\$7,540</b>
<b>SRK-15J3</b>	KMS-1402MLJ	230/60/3	50" x 19 <sup>1/2</sup> " x 43"	275 Lbs.	<b>\$7,670</b>
<b>Accessories</b>					
Tubing Kit: <b>HS-0250</b> - 25' Brazing Required R-404A					\$560
<b>HS-0251</b> - 35' Brazing Required R-404A					\$720
<b>HS-0252</b> - 55' Brazing Required R-404A					\$890
**3 wire with neutral for 115V					

Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight	List F.O.B. Griffin
<b>URC-14F</b> <b>URC-14FZ†</b>	KM-901MRJ(3)(Z†), KM-1100MRJ (Z†), KM-1301SRJ(3)(Z†), KM-1340MRJ(3)(Z†), F-1501MRJ(-C)(Z†)	115/60/1	35 <sup>11/16</sup> " x 14 <sup>1/16</sup> " x 36 <sup>1/2</sup> "	110 Lbs.	<b>\$2,520</b>
<b>Accessories</b>					
Tubing Kit: <b>R404-2068-2</b> - 20' Pre-charged R-404A					\$560
<b>R404-3568-2</b> - 35' Pre-charged R-404A					\$730
<b>R404-5568-2</b> - 55' Pre-charged R-404A					\$920
<b>HS-2150</b> - Quick-Connect Kit (not required if line set is ordered)					\$290
<b>HS-5102</b> - Hail Guard Kit					\$350
†Always pair "Z" model ice machines with "Z" model remote condenser.					

Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight	List F.O.B. Griffin
<b>SRK-20J</b>	KMS-2000MLJ	230/60/1**	59 <sup>9/16</sup> " x 19 <sup>1/2</sup> " x 45"	325 Lbs.	<b>\$13,090</b>
<b>SRK-20J3</b>	KMS-2000MLJ	230/60/3	59 <sup>9/16</sup> " x 19 <sup>1/2</sup> " x 45"	325 Lbs.	<b>\$13,470</b>
<b>Accessories</b>					
Tubing Kit: <b>HS-0243</b> - 25' Brazing Required R-404A					\$560
<b>HS-0244</b> - 35' Brazing Required R-404A					\$720
<b>HS-0245</b> - 55' Brazing Required R-404A					\$950
**3 wire with neutral for 115V					

Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight	List F.O.B. Griffin
<b>URC-22F</b> <b>URC-22FZ†</b>	KM-1601MRJ(3)(Z†), KM-1601SRJ(3)(Z†), KM-1900SRJ(3)(Z†), KM-2200SRJ(3)(Z†), KMH-2100SRJ(3)(Z†), F-2001MRJ3(-C)(Z†)	115/60/1	46 <sup>3/8</sup> " x 14 <sup>1/16</sup> " x 40 <sup>1/2</sup> "	165 Lbs.	<b>\$3,590</b>
<b>URC-26J</b>	KM-2600SRJ(3)	115/60/1	46 <sup>3/8</sup> " x 14 <sup>1/16</sup> " x 40 <sup>1/2</sup> "	273 Lbs.	<b>\$4,750</b>
<b>Accessories</b>					
Tubing Kit: R404-35610 - 20' Pre-charged R-404A					\$730
R404-20610 - 20' Pre-charged R-404A					\$560
R404-55610 - 55' Pre-charged R-404A					\$980
<b>HS-2150</b> - Quick-Connect Kit (not required if line set is ordered)					\$290
<b>HS-5095</b> - Hail Guard Kit					\$250
†Always pair "Z" model ice machines with "Z" model remote condenser.					



# REMOTE CONDENSER

## REMOTE CONDENSER MATRIX

### Line Sets - PRE-CHARGED

Remote Condenser	Ice Machines	Shipping Weight	20' Length	35' Length	55' Length
URC-5F	KM-520MRJ, KMD-530MRJ, KM-660MRJ, FD-650MRJ-C, FD-1002MRJ-C, F-1002MRJ(-C)	60 Lbs.	R404-2046-2	R404-3546-2	N/A
URC-9F	KML-700MRJ, KMD-860MRJ	95 Lbs.v	R404-2068-2	R404-3568-2	R404-5568-2
URC-14F	KM-901MRJ(3), KM-1100MRJ, KM-1301SRJ(3), KM-1340MRJ(3), F-1501MRJ(-C)	110 Lbs.	R404-2068-2	R404-3568-2	R404-5568-2
URC-22F	KM-1601MRJ(3), KM-1601SRJ(3), KM-1900SRJ(3), KM-2200SRJ(3), KMH-2100SRJ(3), F-2001MRJ(3)(-C)	165 Lbs.	R404-20610	R404-35610	R404-55610
URC-26J	KM-2600SRJ3	273 Lbs.	R404-20610	R404-35610	R404-55610

### Line Sets - PRE-CHARGED

Remote Condenser	Ice Machines	Shipping Weight	25' Length	35' Length	55' Length
URC-5FZ†	zKM-520MRJZ†, KM-660MRJZ†, KMD-530MRJZ†, FD-650MRJZ†-C, F-1002MRJZ†(-C), FD-1002MRJZ†(-C)	90 Lbs.	HS-5587	HS-5588	N/A
URC-9FZ†	KML-700MRJZ†, KMD-860MRJZ†	90 Lbs.	HS-5604	HS-5605	HS-5606
URC-14FZ†	KM-901MRJZ†(3), KM-1100MRJZ†, KM-1301SRJZ†(3), KM-1340MRJZ(3) F-1501MRJZ(-C)	100 Lbs.	HS-5604	HS-5605	HS-5606
URC-22FZ†	KM-1601MRJZ†(3), KM-1601SRJZ†(3), KM-1900SRJZ†(3), KM-2200SRJZ†(3), KMH-2100SRJZ†(3), F-2001MRJZ†(3)(-C)	130 Lbs.	HS-5323	HS-5324	HS-5325
URC-26JZ†	KM-2600SRJZ3†	150 Lbs.	HS-5323	HS-5324	HS-5325

†Always pair the “Z” series remote condensers with the “Z” series ice makers.  
Call factory for more information.

### Line Sets - PRE-CHARGED

Remote Condenser	Ice Machines	Shipping Weight	25' Length	35' Length	55' Length
SRC-10J	FS-1001MLJ-C, FS-1022MLJ-C	200 Lbs.	HS-5299*	HS-5300*	HS-5301*
SRK-10J	KMS-822MLJ	230 Lbs.	HS-0250*	HS-0251*	HS-0252*
SRK-12J SRK-12J3	KMS-1122MLJ	275 Lbs.	HS-0250*	HS-0251*	HS-0252*
SRC-14J	FS-1501MLJ-C	220 Lbs.	HS-5323*	HS-5324*	HS-5325*
SRK-15J SRK-15J3	KMS-1402MLJ	275 Lbs.	HS-0250*	HS-0251*	HS-0252*
SRK-20J SRK-20J3	KMS-2000MLJ	345 Lbs.	HS-0243*	HS-0244*	HS-0245*

\*Line sets require refrigerant



# WATER FILTRATION

Model Number	Description	Undercounter KMs	KM Cubers	IM Cubers	Flakers / Cubelet	DCMs
<b>H9320-51</b> Use E-10 10" Prefilter	Single	AM-50, KM-81, 116, 161 KM-231, 301	KM-350, 520, 660 KML-325, 500, 700 KMD-410, 460, 530 DKM-500	IM-200,500 IM-50BAA-LM	All Models	All Models
<b>H9320-52</b> Use E-20 20" Prefilter	Twin	N/A	KM-901, 1100, KMD-860 KMS-822, 1122, 1402	IM-50BAA-Q	N/A	N/A
<b>H9320-53</b> Use E-20 20" Prefilter	Triple	N/A	KM-1301, 1340, 1601, 1900, KM-2200, 2600 KMH-2100 KMS-2000	N/A	N/A	N/A
<b>H9655-11</b>	Replacement Cartridge (1) One each					

Recommended water filter configurations based on average ice machine usage and regular filter replacement. If your operation has challenging water conditions or higher usage, then it may be necessary to use an additional filter or prefilter.

Water Filters	Description	Height of System (Manifold + Cartridge)	List F.O.B. Griffin
<b>H9320-51</b>	Single	18.4" H	<b>\$530</b>
<b>H9320-52</b>	Twin	19.11" H	<b>\$890</b>
<b>H9320-53</b>	Triple	19.15" H	<b>\$1,240</b>
<b>H9320-54</b>	Single	18.1" H	<b>\$570</b>
<b>H9655-11</b>	Replacement Cartridge each		<b>\$220</b>
<b>H9655-06</b>	Replacement Cartridge (6 pk)		<b>\$1,000</b>
<b>H9655-08</b>	4H-SI Cartridge (1 pk)	18.1" H	<b>\$400</b>

Prefilters	Description	Height of System (Manifold + Cartridge)	List F.O.B. Griffin
<b>9534-26</b>	E-20 Replacement Cartridges (6 pk)		<b>\$240</b>
<b>9534-12</b>	E-10 Replacement Cartridges (12 pk)		<b>\$250</b>
<b>9534-20</b>	E-20 Replacement Cartridges (20 pk)		<b>\$520</b>
<b>9534-40</b>	E-10 Replacement Cartridges (40 pk)		<b>\$500</b>
<b>9795-80</b>	E-10 Prefilter (10")		<b>\$310</b>
<b>9795-90</b>	E-20 Prefilter (20")		<b>\$400</b>



Triple Configuration Shown  
(Single and Twin Configurations Available)



# ICE MACHINE ACCESSORIES

Model Number	Description Flow Rate (Gal. per min.)	Undercounter KMs	KM Cubers	IM Cubers	Flakers / Cubelet	DCMs
HS-5282	Low Flow (.34 GPM)	AM-51B, KM-81B, KM-161B	N/A	N/A	All Models	N/A
HS-5283	Standard Flow (1.3 GPM)	KM-231B, KM-301B	KM-350M, KML-325M, 500M, KMD-410M, DKM-500B	IM-200BAB IM-500SAA IM-50BAA	N/A	N/A
HS-5284	Fast Flow (4.2 GPM)	N/A	KM - 520M, 660M, 901M, 1100M, 1301S, 1340M, 1601M, 1601S, 1900S, 2200S, 2600S KMD - 460M, 530M, 860M, 901M, KML-700M KMS - 822M, 830M, 1122M, 1402M, 2000M KMH-2100S	N/A	N/A	N/A
HS-5285	Replacement Cartridge (1) One each					

Model Number	Description	Overall Dimensions Model W x D x H	List F.O.B. Griffin
HS-5282	Low Flow (.34 GPM)	3.8" x 3.6" x 8.0"	\$1,200
HS-5283	Standard Flow (1.3 GPM)	3.8" x 3.6" x 8.0"	\$1,200
HS-5284	Fast Flow (4.2 GPM)	5.98" x 3.6" x 9.28"	\$1,200
HS-5285	Replacement Cartridge each		\$700



**HS-5282**  
EcO<sub>3</sub>Ice Low Flow  
Ozone System

**HS-5284**  
EcO<sub>3</sub>Ice Fast Flow  
Ozone System

**HS-5285**  
EcO<sub>3</sub>Ice Ozone  
System  
Replacement  
Cartridge

**HS-5283**  
EcO<sub>3</sub>Ice Standard  
Flow Ozone System

EcO<sub>3</sub>Ice™



## Remote Monitoring System

For use on Hoshizaki KM Cuber ice machines

Model Number	For use with	Shipping Length	Shipping Width	Shipping Height	Shipping Weight	List F.O.B. Griffin
HS-5562	KM Cuber ice machines Not for use with KMD-410	8"	8"	3"	1 lb.	\$880



- Performance dashboard for status, historical data
- Alert notification by email or text
- Remotely diagnose machines
- Control functions: ON/OFF, Reset, Lock-down



DEVICES



SECURE CLOUD SERVER



CELLULAR CONNECTIVITY



SMART GATEWAY





# STEELHEART



**HOSHIZAKI'S Steelheart Series** is a commercial line engineered for durability, performance and efficiency. As anyone that runs a commercial kitchen knows, only the strong survive. Just like our legendary ice makers, we've designed our new refrigeration series to survive conditions that would send lesser equipment to the scrap yard. Without compromising performance, Hoshizaki seeks natural solutions such as sustainable materials and hydrocarbon refrigerants for a clean and healthy environment. Combined with Hoshizaki's unique ducted airflow technology, food products remain fresh, nutritious, and safe as a result of uniform temperatures and quick recovery.

- Hoshizaki Steelheart products comply with the Buy American Act
- All Stainless construction - inside and out
- Durable and easy to clean
- Designed to be reliable
- Fewer parts and non-critical features means less service calls
- Top mount refrigeration is easier to clean and creates more interior and exterior storage space
- Uprights accommodate full-size tray pans and roll through standard entryways with casters
- Uses environmentally friendly R290 hydrocarbon refrigerant
- Endlessly configurable to meet workflow needs
- Maintains NSF safe temperatures in 100° environments
- Air circulates evenly, even when over-stuffed



# REFRIGERATION MODEL NUMBER IDENTIFICATION CODE

## HORIZONTAL REFRIGERATION | MODEL NUMBER IDENTIFICATION CODE

S R 48 A - 18MD2

- Series Identification
- U** Undercounter
  - W** Worktop
  - S** Sandwich Prep/Mega Top
  - P** Pizza Prep
  - C** Chef Base
- Model Identification
- R** Refrigerator
  - F** Freezer
- Unit Width
- ##** In Inches
- Series Modification
- A** Alphabetically increases per model revisions
- Options Configuration
- LP / -D** Low Profile / Drawers
  - # / -#D#** Number of 1/6 Sized Pan Capacity / Number of 1/6 Sized Pan Capacity with Number of Drawers in Sandwich Prep
  - #M/ -#MD#** Number of 1/6 Sized Pan Capacity / Number of 1/6 Sized Pan Capacity with Number of Drawers in Mega Top
  - 01** Unit with Cylinder Lock

**SR48A-18MD2**

Mega Top Prep Table,  
Refrigerator,  
48" Wide,  
Revision A\*,

(18) 1/6 Sized Pan Capacity in Rail,  
Door and 2 Drawers\*

\*The series modification letter can be generally ignored when talking about the unit, this letter is important if you are getting Tech Support or ordering service parts.



## UPRIGHT REFRIGERATION | MODEL NUMBER IDENTIFICATION CODE

R 1 A - FS - FS  
PT & RT ONLY

- Model Identification
- R** Refrigerator
  - F** Freezer
  - DT** Dual Temp
  - PT** Pass Thru
  - RN** Roll In
  - RT** Roll Thru
- Number of Sections
- 1 / 2 / 3** One, Two, or Three Sections
- Series Modification
- A** Alphabetically increases per model revisions
- Door Configuration
- FS / -HS** Full Height or Half Height Stainless Door
  - FG / -HG** Full Height or Half Height Glass Door
  - FSL / -HSL** Full Height or Half Height Stainless Door, Left-Hand Hinge

**RIA-FS**

Upright Refrigerator,  
One Section  
Revision A\*,

Full Stainless Door

\*The series modification letter can be generally ignored when talking about the unit, this letter is important if you are getting Tech Support or ordering service parts.





# WARRANTY

**EFFECTIVE: July 1, 2022**

Supersedes all previous price lists

## TERMS and CONDITIONS

Prices are F.O.B. Factory. All prices and specifications are subject to change without notice. HOSHIZAKI reserves the right to determine point of shipment.

### TERMS:

Terms are such as the Company may extend to the purchaser.

### LOST OR DAMAGED SHIPMENTS:

Whenever seller shall deliver or cause to be delivered to a common carrier any goods ordered by consignee, whether the particular common carrier shall have been designated in the shipping instructions of the consignee or not, seller shall not be responsible for any delays or damage in shipment and the common carrier to which seller shall deliver goods shipped to the consignee is hereby declared to the agent of the consignee. Therefore it is the responsibility of the consignee to file claim with the carrier for lost or damaged shipments.

## WARRANTY

All units to be free from manufacturing defects, covered by:

### Steelheart Series Refrigerators & Freezers

- 3-Year - Parts & Labor on entire machine
- 5-Year - Parts on Compressor

### Compact Undercounter Refrigerators - HR24 & HR15

- 3-Year - Parts & Labor on entire machine

### Back Bar Refrigerators & Glass Door Merchandisers

- 3-Year - Parts & Labor on entire machine
- 5-Year - Parts on Compressor

### Economy Refrigeration Series

- 2 Year - Parts and Labor on entire machine
- 5 Year - Parts on Compressor

### Warranty

Warranty valid in United States, Canada, Puerto Rico, & U.S. Territories only. Contact Factory for Warranty in other Countries. Refer to manufacturer's full warranty for complete details. Suggested List Prices are intended only as a guide. This does not restrict the price seller may establish due to market conditions.

## AGENCY LISTINGS and MARKS



# UPRIGHT REFRIGERATORS



**R1A-FS(L)**  
ENERGY STAR  
Qualified

**R1A-HS(L)**  
ENERGY STAR  
Qualified

**R2A-FS**

**R2A-HS**

**R3A-FS**

**R3A-HS**

- Stainless steel interior and exterior front, sides and top
- Unique ducted air distribution system, maintains uniform cabinet temperatures even when full
- 4" Heavy duty stem casters standard
- Energy efficient thermostatic expansion valve
- Self-closing stainless steel doors with spring assist hinges, stay open feature and locks

Model Number	R1A-FS (L) - Left-Hand hinge	R1A-HS (L) - Left-Hand hinge	R2A-FS	R2A-HS	R3A-FS	R3A-HS
Interior Storage Capacity (AHAM)	23.10 ft <sup>3</sup>	23.10 ft <sup>3</sup>	50.37 ft <sup>3</sup>	50.37 ft <sup>3</sup>	79.03 ft <sup>3</sup>	79.03 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	27.5" x 33.5" x 79.5"	27.5" x 33.5" x 79.5"	55" x 33.5" x 79.5"	55" x 33.5" x 79.5"	82.5" x 33.5" x 79.5"	82.5" x 33.5" x 79.5"
Depth with Doors Open at 90°	59.25"	59.25"	59.25"	59.25"	59.25"	59.25"
Interior Door Opening Width	21.75"	21.75"	21.75"	21.75"	21.75"	21.75"
Interior Door Opening Height	59.25"	27.75" each	59.25"	27.75" each	59.25"	27.75" each
Adjustable Shelves	3	3	6	6	9	9
Center Shelves (C)	N/A	N/A	3	3	6	6
Shelf Dimensions (W x D)	21.25" x 26"	21.25" x 26"	21.25" x 26" (C) 6" x 17.8"	21.25" x 26" (C) 6" x 17.8"	21.25" x 26" (C) 6 x 22.9"	21.25" x 26" (C) 6 x 22.9"
Crated Shipping Weight	345 lbs.	345 lbs.	562 lbs.	562 lbs.	811 lbs.	811 lbs.
Crated Shipping Dimensions (L x W x H)	31.5" x 37.5" x 81"	31.5" x 37.5" x 81"	58" x 37.5" x 81"	58" x 37.5" x 81"	86" x 37.5" x 81"	86" x 37.5" x 81"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	4.3	4.3	7.1	7.1	9.5	9.5
HACR Breaker (AMP)	15	15	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	1.25	1.25	3.47	3.47	4.39	4.39
Heat Rejection (BTU / hr)*	317	317	513	513	703	703
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Control Set Point Range	31° - 52°F	31° - 52°F	31° - 52°F	31° - 52°F	31° - 52°F	31° - 52°F
Refrigerant	R290	R290	R290	R290	R290	R290
List F. O. B. Griffin	<b>\$10,030</b>	<b>\$11,640</b>	<b>\$13,340</b>	<b>\$16,200</b>	<b>\$23,240</b>	<b>\$26,550</b>

\*Based on 100°F ambient cycling at set point

See Refrigeration Accessories on pages 84-89 for options and prices





# UPRIGHT REFRIGERATORS



- Stainless steel interior and exterior front, sides and top
- Lockable doors are energy efficient multi pane, argon filled
- Energy efficient thermostatic expansion valve/self contained refrigeration system
- All models come with energy efficient vertical LED lights
- Unique ducted air distribution system, maintains a uniform cabinet temperatures even when full
- 4" Heavy duty stem casters standard
- Center shelves for added storage capacity

Model Number	R1A-FG	R1A-HG	R2A-FG	R2A-HG	R3A-FG	R3A-HG
Interior Storage Capacity (AHAM)	23.1 ft <sup>3</sup>	23.1 ft <sup>3</sup>	50.37 ft <sup>3</sup>	50.37 ft <sup>3</sup>	79.03 ft <sup>3</sup>	79.03 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	27.5" x 34.5" x 79.5"	27.5" x 34.5" x 79.5"	55" x 34.5" x 79.5"	55" x 34.5" x 79.5"	82.5" x 34.5" x 79.5"	82.5" x 34.5" x 79.5"
Depth with Doors Open at 90°	57"	57"	57"	57"	57"	57"
Interior Door Opening Width	21.75"	21.75"	21.75"	21.75"	21.75"	21.75"
Interior Door Opening Height	59.25"	27.75" each	59.25"	27.75" each	59.25"	27.75" each
Adjustable Shelves	3	3	6	6	9	9
Center Shelves (C)	N/A	N/A	3	3	6	6
Shelf Dimensions (W x D)	21.25" x 26"	21.25" x 26"	21.25" x 26" (C) 6" x 17.8"	21.25" x 26" (C) 6" x 17.8"	21.25" x 26" (C) 6" x 22.9"	21.25" x 26" (C) 6" x 22.9"
Crated Shipping Weight	350 lbs.	350 lbs.	570 lbs.	570 lbs.	826 lbs.	826 lbs.
Crated Shipping Dimensions (L x W x H)	37.5" x 31.5" x 81"	37.5" x 31.5" x 81"	58" x 37.5" x 81"	58" x 37.5" x 81"	86" x 37.5" x 81"	86" x 37.5" x 81"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	5	5	8	8	9.5	9.5
HACR Breaker (AMP)	15	15	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	2.47	2.47	5.05	5.05	6.5	6.5
Heat Rejection (BTU / hr)*	639	639	978	978	1255	1255
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Control Set Point Range	31° - 52°F	31° - 52°F	31° - 52°F	31° - 52°F	31° - 52°F	31° - 52°F
Refrigerant	R290	R290	R290	R290	R290	R290
List F.O.B. Griffin	\$12,120	\$14,300	\$17,060	\$19,130	\$31,240	\$34,190

\*Based on 100°F ambient cycling at set point  
See Refrigeration Accessories on pages 84-89 for options and prices





# UPRIGHT FREEZERS



F1A-FS(L)

F1A-HS(L)

F2A-FS

F2A-HS

F3A-FS

F3A-HS

- Stainless steel interior and exterior front, sides and top
- 4" Heavy duty stem casters standard
- Unique ducted air distribution system, maintains a uniform cabinet temperatures even when full
- Energy efficient thermostatic expansion valve
- Self-closing stainless steel doors with spring assist hinges, stay open feature and locks

Model Number	F1A-FS (L) - Left-Hand hinge	F1A-HS (L) - Left-Hand hinge	F2A-FS	F2A-HS	F3A-FS	F3A-HS
Interior Storage Capacity (AHAM)	23.1 ft <sup>3</sup>	23.1 ft <sup>3</sup>	50.37 ft <sup>3</sup>	50.37 ft <sup>3</sup>	79.03 ft <sup>3</sup>	79.03 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	27.5" x 33.5" x 79.5"	27.5" x 33.5" x 79.5"	55" x 33.5" x 79.5"	55" x 33.5" x 79.5"	82.5" x 33.5" x 79.5"	82.5" x 33.5" x 79.5"
Depth with Doors Open at 90°	59.25"	59.25"	59.25"	59.25"	59.25"	59.25"
Interior Door Opening Width	21.75"	21.75"	21.75"	21.75"	21.75"	21.75"
Interior Door Opening Height	59.25"	27.75" each	59.25"	27.75" each	59.25"	27.75" each
Adjustable Shelves	3	3	6	6	9	9
Shelf Dimensions (W x D)	21.25" x 26"	21.25" x 26"	21.25" x 26" (C) 6" x 17.8"	21.25" x 26" (C) 6" x 17.8"	21.25" x 26" (C) 6" x 22.9"	21.25" x 26" (C) 6" x 22.9"
Crated Shipping Weight	345 lbs.	345 lbs.	562 lbs.	562 lbs.	830 lbs.	830 lbs.
Crated Shipping Dimensions (L x W x H)	31.5" x 37.5" x 81"	31.5" x 37.5" x 81"	58" x 37.5" x 81"	58" x 37.5" x 81"	86" x 37.5" x 81"	86" x 37.5" x 81"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	230V/60/1	230V/60/1
Amperage (AMP)	8.46	8.46	8.7	8.7	11	11
HACR Breaker (AMP)	15	15	15	15	20	20
Energy Consumption (kWh / day) ASHRAE	6.25	6.25	12.16	12.16	17.02	17.02
Heat Rejection (BTU / hr)*	1178	1178	1820	1820	1643	1643
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	208 - 254	208 - 254
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Control Set Point Range	-10° - +12°F	-10° - +12°F	-10° - +12°F	-10° - +12°F	-10° - +12°F	-10° - +12°F
Refrigerant	R290	R290	R290	R290	R290	R290
List F. O. B. Griffin	<b>\$12,200</b>	<b>\$13,490</b>	<b>\$17,090</b>	<b>\$18,990</b>	<b>\$25,360</b>	<b>\$28,140</b>

\*Based on 100°F ambient cycling at set point  
See Refrigeration Accessories on pages 84-89 for options and prices





**STEELHEART**

# UPRIGHT FREEZERS /DUAL TEMP



**F1A-FG**



**F1A-HG**



**F2A-FG**



**F2A-HG**



**DT1A-HS**



**DT2A-FS**

- Stainless steel interior and exterior front, sides and top
- Lockable doors are energy efficient multi pane, argon filled
- All models come with energy efficient vertical LED lights
- Unique ducted air distribution system, maintains a uniform cabinet temperatures
- Dual temperature cabinets for space efficiency
- 4" Heavy duty stem casters standard even when full

Model Number	F1A-FG	F1A-HG	F2A-FG	F2A-HG	DT1A-HS	DT2A-FS
<b>Interior Storage Capacity (AHAM) - Refrigerator Freezer</b>	23.1 ft <sup>3</sup>	23.1 ft <sup>3</sup>	50.37 ft <sup>3</sup>	50.37 ft <sup>3</sup>	10.19 ft <sup>3</sup> 10.19 ft <sup>3</sup>	23.10 ft <sup>3</sup> 23.10 ft <sup>3</sup>
<b>Overall Dimensions (W x D x H including 4" casters)</b>	27.5" x 34.5" x 79.5"	27.5" x 34.5" x 79.5"	55" x 34.5" x 79.5"	55" x 34.5" x 79.5"	27.5" x 35" x 79.5"	55" x 33.5" x 79.5"
<b>Depth with Doors Open at 90°</b>	57"	57"	57"	57"	61.75"	59.25"
<b>Interior Door Opening Width</b>	21.75"	21.75"	21.75"	21.75"	21.75"	21.75"
<b>Interior Door Opening Height</b>	59.25"	27.75" each	59.25"	27.75" each	27.75" each	59.25"
<b>Adjustable Shelves</b>	3	3	6	6	3	3
<b>Center Shelves (C)</b>	N/A	N/A	3	3	N/A	N/A
<b>Shelf Dimensions (W x D)</b>	21.25" x 26"	21.25" x 26"	(L/R) 21.25" x 26" (C) 6" x 17.8"	(L/R) 21.25" x 26" (C) 6" x 17.8"	21.25" x 26"	21.25" x 26"
<b>Crated Shipping Weight</b>	365 lbs.	365 lbs.	602 lbs.	602 lbs.	415 lbs.	634 lbs.
<b>Crated Shipping Dimensions (L x W x H)</b>	37.5" x 31.5" x 81"	37.5" x 31.5" x 81"	58" x 37.5" x 81"	58" x 37.5" x 81"	37.5" x 31.5" x 81"	58" x 37.5" x 81"
<b>Voltage</b>	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
<b>Amperage (AMP)</b>	8.5	8.5	9.1	9.1	5.5	14
<b>HACR Breaker (AMP)</b>	15	15	15	15	15	20
<b>Energy Consumption (kWh / day) ASHRAE</b>	7.73	7.73	16.3	16.3	4.49	8.59
<b>Heat Rejection (BTU / hr)*</b>	806	806	1694	1694	168   439	376   1401
<b>Voltage Range</b>	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104-126
<b>Ambient Temp. Range</b>	45° - 80°F	45° - 100°F	45° - 80°F	45° - 100°F	45° - 100°F	45° to 100°F
<b>Control Set Point Range - Refrigerator Freezer</b>	-10° - +12°F	-10° - +12°F	-10° - +12°F	-10° - +12°F	33° to 52°F - 10° to 10°F	33° to 52°F - 10° to 10°F
<b>Refrigerant</b>	R290	R290	R290	R290	R290	R290
<b>List F.O.B. Griffin</b>	<b>\$17,470</b>	<b>\$17,910</b>	<b>\$24,690</b>	<b>\$26,500</b>	<b>\$21,410</b>	<b>\$28,140</b>

\*Based on 100°F ambient cycling at set point  
See Refrigeration Accessories on pages 84-89 for options and prices



# PASS THRU REFRIGERATORS



**PT1A-FS-FS**  
(Shown with door open)  
**ENERGY STAR**  
Qualified



**PT1A-HS-HS**  
**ENERGY STAR**  
Qualified



**PT2A-FS-FS**



**PT2A-HS-HS**

- Stainless steel interior and exterior front, sides and top
- Lockable doors are energy efficient multi pane, argon filled
- All models come with energy efficient vertical LED lights
- Unique ducted air distribution system, maintains a uniform cabinet temperatures
- 4" Heavy duty stem casters standard, two with brakes

Model Number	PT1A-FS-FS	PT1A-HS-HS	PT2A-FS-FS	PT2A-HS-HS
Interior Storage Capacity (AHAM)	24.2 ft <sup>3</sup>	24.2 ft <sup>3</sup>	52.50 ft <sup>3</sup>	52.50 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	27.5" x 35.75" x 79.5"	27.5" x 35.75" x 79.5"	55" x 35.75" x 79.5"	55" x 35.75" x 79.5"
Depth with Doors Open at 90°	87.25"	87.25"	87.25"	87.25"
Interior Door Opening Width	21.75"	21.75"	21.75"	21.75"
Interior Door Opening Height	59.25"	27.75" each	59.25"	27.75" each
Adjustable Shelves	3	3	6	6
Center Shelves (C)	N/A	N/A	6	6
Shelf Dimensions (W x D)	21.25" x 30.75"	21.25" x 30.75"	21.25" x 26" (C) 6" x 17.8"	21.25" x 26" (C) 6" x 17.8"
Crated Shipping Weight	357 lbs	357 lbs	592 lbs	592 lbs
Crated Shipping Dimensions (L x W x H)	38.5" x 31.5" x 81"	38.5" x 31.5" x 81"	58" x 38.5" x 81"	58" x 38.5" x 81"
Voltage	115/60/1	115/60/1	115/60/1	115/60/1
Amperage (AMP)	5	5	8	8
HACR Breaker (AMP)	15.0 Amps	15.0 Amps	15.0 Amps	15.0 Amps
Energy Consumption (kWh / day) ASHRAE	1.31	1.31	3.24	3.24
Heat Rejection (BTU / hr)*	348	348	581	581
Voltage Range	104-126	104-126	104-126	104-126
Ambient Temp. Range	45° to 100°F	45° to 100°F	45° to 100°F	45° to 100°F
Control Set Point Range	31° to 52°F	31° to 52°F	31° to 52°F	31° to 52°F
Refrigerant	R290	R290	R290	R290
List F. O. B. Griffin	<b>\$19,450</b>	<b>\$22,460</b>	<b>\$26,930</b>	<b>\$31,770</b>

\*Based on 100°F ambient cycling at set point  
See Refrigeration Accessories on pages 84-89 for options and prices





# PASS THRU REFRIGERATORS



**PT1A-FG-FG**



**PT2A-FG-FG**

- Stainless steel interior and exterior front, sides and top
- Lockable doors are energy efficient multi pane, argon filled
- All models come with energy efficient vertical LED lights

- Unique ducted air distribution system, maintains a uniform cabinet temperatures
- 4" Heavy duty stem casters standard, two with brakes

Model Number	PT1A-FG-FG	PT2A-FG-FG
Interior Storage Capacity (AHAM)	24.2 ft <sup>3</sup>	52.50 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	27.5" x 37.75" x 79.5"	55" x 37.75" x 79.5"
Depth with Doors Open at 90°	82.5"	82.5"
Interior Door Opening Width	21.75"	21.75"
Interior Door Opening Height	59.25"	59.25"
Adjustable Shelves	3	6
Shelf Dimensions (W x D)	21.75" x 30.75"	21.25" x 26"
Crated Shipping Weight	367 lbs.	681 lbs.
Crated Shipping Dimensions (L x W x H)	41.25" x 31.5" x 81"	58" x 41.25" x 81"
Voltage	115V/60/1	115V/60/1
Amperage (AMP)	5	8
HACR Breaker (AMP)	15	15
Energy Consumption (kWh / day) ASHRAE	2.68	6
Heat Rejection (BTU / hr)*	653	1429
Voltage Range	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F
Control Set Point Range	31° to 52°F	31° to 52°F
Refrigerant	R290	R290
List F.O.B. Griffin	<b>\$23,330</b>	<b>\$33,740</b>

\*Based on 100°F ambient cycling at set point  
See Refrigeration Accessories on pages 84-89 for options and prices



# ROLL IN REFRIGERATORS



**RN1A-FS**



**RN2A-FS**

- Stainless steel interior and exterior front, sides and top
- Environmentally friendly R290 hydrocarbon refrigerant
- All models come with energy efficient vertical LED lights
- Unique ducted air distribution system, maintains a uniform cabinet temperatures

- Roll in racks up to 72" tall (supplied by others) roll in racks up to 72" tall (supplied by others)
- Made to order

Model Number	RN1A-FS	RN2A-FS
Interior Storage Capacity (AHAM)	38.13 ft <sup>3</sup>	78.35 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	35" x 38.9" x 87.5"	68" x 38.9" x 87.5"
Depth with Doors Open at 90°	65.25"	65.25"
Interior Door Opening Width	29.25"	29.25"
Interior Door Opening Height	72.75"	72.75"
Crated Shipping Weight	429 lbs	676 lbs
Crated Shipping Dimensions (L x W x H)	40.5" x 39" x 93.5"	72" x 40.5" x 93.75"
Voltage	115V/60/1	115V/60/1
Amperage (AMP)	6.4	8.2
HACR Breaker (AMP)	15	15
Energy Consumption (kWh / day) ASHRAE	3.186	5.06
Heat Rejection (BTU / hr)*	774	1376
Voltage Range	104-126	104-126
Ambient Temp. Range	45° to 100°	45° to 100°
Control Set Point Range	31° - 52°F	31° - 52°F
Refrigerant	R290	R290
List F.O.B. Griffin	<b>\$17,640</b>	<b>\$25,520</b>

\*Based on 100°F ambient cycling at set point  
See Refrigeration Accessories on pages 84-89 for options and prices



# ROLL THRU REFRIGERATORS



**RT1A-FS-FS**



**RT2A-FS-FS**

- Stainless steel interior and exterior front, sides and top
- Environmentally friendly R290 hydrocarbon refrigerant
- All models come with energy efficient vertical LED lights
- Unique ducted air distribution system, maintains a uniform cabinet temperatures
- Reinforced stainless steel ramp and floor accommodate roll in racks up to 72" tall (supplied by others)
- Made to order

Model Number	RT1A-FS-FS	RT2A-FS-FS
Interior Storage Capacity (AHAM)	38.13 ft <sup>3</sup>	78.35 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	35" x 45.5" x 87.5"	68" x 45.5" x 87.5"
Depth with Doors Open at 90°	98.5"	98.5"
Interior Door Opening Width	29.25"	29.25"
Interior Door Opening Height	72.75"	72.75"
Crated Shipping Weight	459 lbs	737 lbs
Crated Shipping Dimensions (L x W x H)	40.5 x 39" x 93.5"	72" x 40.5" x 93.75"
Voltage	115V/60/1	115V/60/1
Amperage (AMP)	6.4	8.2
HACR Breaker (AMP)	15	15
Energy Consumption (kWh / day) ASHRAE	3.186	5.06
Heat Rejection (BTU / hr)*	774	1376
Voltage Range	104-126	104-126
Ambient Temp. Range	45° to 100°	45° to 100°
Control Set Point Range	31° - 52°F	31° - 52°F
Refrigerant	R290	R290
List F.O.B. Griffin	<b>\$22,760</b>	<b>\$32,940</b>

\*Based on 100°F ambient cycling at set point  
See Refrigeration Accessories on pages 84-89 for options and prices

# COMPACT UNDERCOUNTER REFRIGERATORS



**HR15A**  
ENERGY STAR  
Qualified



**HR15A-G**



**HR24C**  
ENERGY STAR  
Qualified



**HR24C-G**  
ENERGY STAR  
Qualified

- Stainless steel interior and exterior
- UL approval for outdoor use
- ADA Compliant 
- Lockable stainless steel door is field reversible
- Ducted air flow for even air distribution throughout cabinet
- Interior LED lighting

Model Number	HR15A	HR15A-G	HR24C	HR24C-G
Interior Storage Capacity (AHAM)	2.54 ft <sup>3</sup>	2.54 ft <sup>3</sup>	4.0 ft <sup>3</sup>	3.87 ft <sup>3</sup>
Overall Dimensions (W x D x H including legs)	14.8" x 25.75" x 31.5"	14.8" x 25.75" x 31.5"	23.4" x 24.7" x 31.5"	23.4" x 24.7" x 31.5"
Depth with Doors Open at 90°	37.25"	37.25"	46.7"	46.7"
Interior Door Opening Width	25.75"	24.7"	24.7"	24.7"
Adjustable Shelves	2	2	3	3
Shelves (#) / Dimensions(W x D)	(2) / 10" x 20" adjustable slide out shelf	(2) 10" x 20"	(1) / 18.5" x 17" (2) / 18.5" x 12"	(1) / 18.5" x 17" (2) / 18.5" x 12"
Crated Shipping Weight	115 lbs	115 lbs	115 lbs	115 lbs
Crated Shipping Dimensions (L x W x H)	30.6" x 18.75" x 37"	30.6" x 18.75" x 37"	26" x 30" x 37"	26.8" x 30" x 37"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	.9	.9	1	1.1
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	0.54	0.54	0.64	0.64
Heat Rejection (BTU/hr)	145	145	648	648
Voltage Range	104 - 127	104-127	115 - 127	115 - 127
Ambient Temp. Range	45° - 90°F	45° - 90°F	45° - 100°F	45° - 100°F
Control Set Point Range	33° - 41°F	28° - 40°F	34° - 52°F	34° - 52°F
Refrigerant	R600a	R600a	R600a	R600a
List F.O.B. Griffin	<b>\$3,230</b>	<b>\$4,630</b>	<b>\$4,140</b>	<b>\$5,680</b>



# UNDERCOUNTER REFRIGERATORS



**UR27B(-01)**  
ENERGY STAR  
Qualified



**UR27B-LP**  
ENERGY STAR  
Qualified



**UR36B(-01)**  
ENERGY STAR  
Qualified



**UR48B(-01)**  
ENERGY STAR  
Qualified



**UR60B(-01)**  
ENERGY STAR  
Qualified



**UR72B(-01)**  
ENERGY STAR  
Qualified

- Stainless steel interior and exterior front, sides and top
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Field reversible doors
- Cabinet and doors are insulated with 2" foamed-in-place polyurethane
- 4" Stem casters standard (2.25" casters - LP model)
- Electronic controls

Model Number	<b>UR27B</b> <b>UR27B-01**</b> (01 Cylinder Door Lock)	<b>UR27B-LP</b> Low Profile unit meets ADA requirements	<b>UR36B</b> <b>UR36B-01**</b> (01 Cylinder Door Lock)	<b>UR48B</b> <b>UR48B-01**</b> (01 Cylinder Door Lock)	<b>UR60B</b> <b>UR60B-01**</b> (01 Cylinder Door Lock)	<b>UR72B</b> <b>UR72B-01**</b> (01 Cylinder Door Lock)
Interior Storage Capacity (AHAM)	6.21 ft <sup>3</sup>	6.21 ft <sup>3</sup>	8.64 ft <sup>3</sup>	12 ft <sup>3</sup>	15.1 ft <sup>3</sup>	18.27 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	27" x 30" x 33.75"	27" x 30" x 31.9"	36" x 30" x 33.75"	48" x 30" x 33.75"	60" x 30" x 33.75"	72" x 30" x 33.63"
Depth with Doors Open at 90°	55.5"	55.5"	58.5"	52.5"	58.5"	52.5"
Interior Door Opening Width	22.75"	22.75"	25.5"	19.5"	25.5"	19.5"
Interior Door Opening Height	23"	23"	23"	23"	23"	23"
Adjustable Shelves	1	1	1	2	2	3
Shelf Dimensions (W x D)	22" x 16"	22" x 16"	31" x 16"	21.5" x 16"	27.25" x 16"	22" x 16"
Crated Shipping Weight	173 lbs.	173 lbs.	204 lbs.	249 lbs.	290 lbs.	339 lbs.
Crated Shipping Dimensions (L x W x H)	34" x 31.5" x 36.5"	34" x 31.5" x 35.5"	40.5" x 34" x 36.5"	52.5" x 34" x 36.5"	62.5" x 34" x 36.5"	73.75" x 32" x 36.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.7	2.7	2.5	3	3	3.0
HACR Breaker (AMP)	15	15	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	0.65	0.65	0.69	1.05	0.927	1.12
Heat Rejection (BTU / hr)	193	193	184	278	249	360
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290	R290	R290
List F.O.B. Griffin	<b>\$5,850</b> **\$6,230	<b>\$5,850</b>	<b>\$7,910</b> **\$8,300	<b>\$8,690</b> **\$9,190	<b>\$9,640</b> **\$10,390	<b>\$11,060</b> **\$12,200

**\*\*SPECIAL ORDER - Please contact your local HOSHIZAKI Sales Representative for availability.**  
See Refrigeration Accessories on pages 84-89 for options and prices



# UNDERCOUNTER GLASS DOOR REFRIGERATORS & FREEZER



**UR27B-GLP01**  
ENERGY STAR  
Qualified



**UR48B-GLP01**  
ENERGY STAR  
Qualified



**UF27B-GLP01**  
ENERGY STAR  
Qualified

- Stainless steel interior and exterior front, sides and top
- Standard 2.25" casters (2 with brakes)
- Glass doors with locks are energy efficient multi pane, argon filled
- Energy efficient LED interior lights with on/off switch
- Meets ADA requirements 
- Field reversible glass doors

Model Number	UR27B-GLP01	UR48B-GLP01	UF27B-GLP01
Interior Storage Capacity (AHAM)	6.21 ft <sup>3</sup>	12 ft <sup>3</sup>	6.21 ft <sup>3</sup>
Overall Dimensions W x D x H including (2.25" casters)	27" x 31.5" x 31.9"	48" x 31.5" x 31.9"	27" x 31.5" x 31.9"
Depth with Doors Open at 90°	55.5"	52"	55.5"
Interior Door Opening Width	22.75"	19.5"	22.75"
Interior Door Opening Height	23"	23"	23"
Adjustable Shelves	1	2	1
Shelf Dimensions (W x D)	22" x 16"	21.5" x 16"	22" x 16"
Crated Shipping Weight	183 lbs.	249 lbs.	189 lbs.
Crated Shipping Dimensions (L x W x H)	36" x 31.5" x 35.5"	52.5" x 34" x 36.5"	36" x 31.5" x 35.5"
Voltage	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	3	3	3
HACR Breaker (AMP)	15	15	15
Energy Consumption (kWh / day) ASHRAE	1.15	1.46	4.32
Heat Rejection (BTU / hr)	263	432	468
Voltage Range	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 80°F
Temperature Range	32° - 52°F	32° - 52°F	-10° - 10°F
Refrigerant	R290	R290	R290
List F.O.B. Griffin	<b>\$8,460</b>	<b>\$12,340</b>	<b>\$9,210</b>

See Refrigeration Accessories on pages 84-89 for options and prices



# UNDERCOUNTER FREEZERS



**UF27B(-01)**



**UF27B-LP**



**UF48B(-01)**



**UF60B(-01)**

- Stainless steel interior and exterior front, sides and top
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Field reversible doors
- Cabinet and doors are insulated with 2" foamed-in-place polyurethane
- 4" Stem casters standard (2.25" casters - LP model)
- Enamel coated evaporator coil

Model Number	<b>UF27B</b> <b>UF27B-01**</b> (01 Cylinder Door Lock)	<b>UF27B-LP</b> Low Profile unit meets ADA requirements	<b>UF48B</b> <b>UF48B-01**</b> (01 Cylinder Door Lock)	<b>UF60B</b> <b>UF60B-01**</b> (01 Cylinder Door Lock)
Interior Storage Capacity (AHAM)	6.21 ft <sup>3</sup>	6.21 ft <sup>3</sup>	12 ft <sup>3</sup>	15.27 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	27" x 30" x 33.75"	27" x 30" x 31.9"	48" x 30" x 33.75"	60" x 30" x 33.63"
Depth with Doors Open at 90°	55.5"	55.5"	52.5"	58.5"
Interior Door Opening Width	22.75"	22.75"	19.5"	25.5"
Interior Door Opening Height	23"	23"	23"	23"
Adjustable Shelves	1	1	2	2
Shelf Dimensions (W x D)	22" x 16"	22" x 16"	21.5" x 16"	27.25" x 16"
Crated Shipping Weight	175 lbs.	175 lbs.	258 lbs.	310 lbs.
Crated Shipping Dimensions (L x W x H)	34" x 31.5" x 36.5"	34" x 31.5" x 35.5"	52.5" x 34" x 36.5"	62.5" x 34" x 36.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.4	2.4	3.6	4
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	2.4	2.4	3.6	3.95
Heat Rejection (BTU / hr)	489	509	756	727
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	-10° - +10°F	-10° - +10°F	-10° - +10°F	-10° - +10°F
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	<b>\$6,840</b> <b>**\$7,200</b>	<b>\$7,100</b>	<b>\$9,820</b> <b>**\$10,540</b>	<b>\$12,210</b> <b>**\$12,940</b>

**\*\*SPECIAL ORDER - Please contact your local HOSHIZAKI Sales Representative for availability.**  
See Refrigeration Accessories on pages 84-89 for options and prices



# UNDERCOUNTER REFRIGERATORS with DRAWERS



UR27B-D2



UR48B-D4



UR60B-D4



UR72B-D6

- Stainless steel interior and exterior front, sides and top
- Cabinet and drawers are insulated with 2" foamed in place polyurethane
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Heavy duty drawers with removeable gaskets
- 4" Stem casters standard
- Enamel coated evaporator coil

Model Number	UR27B-D2	UR48B-D4	UR60B-D4	UR72B-D6
Interior Storage Capacity (AHAM)	6.21 ft <sup>3</sup>	12 ft <sup>3</sup>	15.27 ft <sup>3</sup>	18 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	27" x 30" x 33.75"	48" x 30" x 33.75"	60" x 30" x 33.75"	72" x 30" x 33.75"
Depth with Drawer Fully Open	52"	52"	52"	52"
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep
Crated Shipping Weight	203 lbs.	314 lbs.	346 lbs.	443 lbs.
Crated Shipping Dimensions (L x W x H)	34" x 31.5" x 36.5"	52.5" x 34" x 36.5"	62.5" x 34" x 36.5"	73.75" x 32" x 36.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.5	3	3	3
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	0.65	1.05	1.75	1.12
Heat Rejection (BTU / hr)	152	278	249	360
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	<b>\$9,070</b>	<b>\$14,670</b>	<b>\$16,430</b>	<b>\$21,370</b>

See Refrigeration Accessories on pages 84-89 for options and prices



# UNDERCOUNTER FREEZERS with DRAWERS



**UF27B-D2**



**UF48B-D4**

- Stainless steel interior and exterior front, sides and top
- Cabinet and drawers are insulated with 2" foamed in place polyurethane
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Heavy duty drawers with removeable gaskets
- 4" Stem casters standard
- Electronic controls

Model Number	UF27B-D2	UF48B-D4
Interior Storage Capacity (AHAM)	6.21 ft <sup>3</sup>	12 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	27" x 30" x 33.75"	48" x 30" x 33.75"
Depth with Drawer Fully Open	52"	52"
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 size and (1) 1/3 Size, 6" deep
Crated Shipping Weight	207 lbs.	331 lbs.
Crated Shipping Dimensions (L x W x H)	34" x 31.5" x 36.5"	52.5" x 34" x 36.5"
Voltage	115V/60/1	115V/60/1
Amperage (AMP)	3	4
HACR Breaker (AMP)	15	15
Energy Consumption (kWh / day) ASHRAE	2.4	3.60
Heat Rejection (BTU / hr)	489	756
Voltage Range	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F
Temperature Range	-10° - +10°F	-10° - +10°F
Refrigerant	R290	R290
List F.O.B. Griffin	<b>\$10,490</b>	<b>\$15,980</b>

See Refrigeration Accessories on pages 84-89 for options and prices

# WORKTOP REFRIGERATORS



**WR27B(-01)**  
ENERGY STAR  
Qualified



**WR36B(-01)**  
ENERGY STAR  
Qualified



**WR48B(-01)**  
ENERGY STAR  
Qualified



**WR60B(-01)**  
ENERGY STAR  
Qualified



**WR72B(-01)**  
ENERGY STAR  
Qualified

- Stainless steel interior and exterior front, sides and top
- Cabinet and doors are insulated with 2" foamed in place polyurethane
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Field reversible doors
- Enamel coated evaporator coil
- 6" Stem casters standard

Model Number	<b>WR27B</b> <b>WR27B-01**</b> (01 Cylinder Door Lock)	<b>WR36B</b> <b>WR36B-01**</b> (01 Cylinder Door Lock)	<b>WR48B</b> <b>WR48B-01**</b> (01 Cylinder Door Lock)	<b>WR60B</b> <b>WR60B-01**</b> (01 Cylinder Door Lock)	<b>WR72B</b> <b>WR72B-01**</b> (01 Cylinder Door Lock)
Interior Storage Capacity (AHAM)	6.21 ft <sup>3</sup>	8.64 ft <sup>3</sup>	12 ft <sup>3</sup>	15.1 ft <sup>3</sup>	18.27 ft <sup>3</sup>
Overall Dimensions (W x D x H including 6" casters)	27" x 30" x 40"	36" x 30" x 40"	48" x 30" x 40"	60" x 30" x 40"	72" x 30" x 40"
Depth with Doors Open at 90°	55.5"	58.5"	52.5"	58.5"	52.5"
Interior Door Opening Width x Height	22.75" x 23"	25.5" x 23"	19.5" x 23"	25.5" x 23"	19.5" x 23"
Adjustable Shelves	1	1	2	2	3
Shelf Dimensions (W x D)	22" x 16"	31" x 16"	21.5" x 16"	27.25" x 16"	22" x 16"
Crated Shipping Weight	183 lbs.	216 lbs.	264 lbs.	302 lbs.	350 lbs.
Crated Shipping Dimensions (L x W x H)	34" x 31.5" x 40.5"	40.5" x 34" x 40.5"	52.5" x 34" x 40.5"	62.5" x 34" x 40.5"	73.75" x 32" x 36.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.7	2.5	3	3	3
HACR Breaker (AMP)	15	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	0.65	0.69	1.05	0.927	1.12
Heat Rejection (BTU / hr)	193	184	278	249	360
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F				
Temperature Range	32° - 52°F				
Refrigerant	R290	R290	R290	R290	R290
List F.O.B. Griffin	<b>\$6,120</b> <b>**\$6,490</b>	<b>\$8,360</b> <b>**\$8,730</b>	<b>\$9,100</b> <b>**\$9,850</b>	<b>\$10,120</b> <b>**\$10,860</b>	<b>\$11,590</b> <b>**\$12,710</b>

**\*\*SPECIAL ORDER - Please contact your local HOSHIZAKI Sales Representative for availability.**  
See Refrigeration Accessories on pages 84-89 for options and prices



# WORKTOP FREEZERS



WF27B(-01)



WF48B(-01)



WF60B(-01)

- Stainless steel interior and exterior front, sides and top
- Cabinet and doors are insulated with 2" foamed-in-place polyurethane
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Field reversible doors
- Electronic controls
- 6" Stem casters standard

Model Number	<b>WF27B</b> <b>WF27B-01**</b> (01 Cylinder Door Lock)	<b>WF48B</b> <b>WF48B-01**</b> (01 Cylinder Door Lock)	<b>WF60B</b> <b>WF60B-01**</b> (01 Cylinder Door Lock)
Interior Storage Capacity (AHAM)	6.21 ft <sup>3</sup>	12 ft <sup>3</sup>	15.1 ft <sup>3</sup>
Overall Dimensions (W x D x H including 6" casters)	27" x 30" x 40"	48" x 30" x 40"	60" x 30" x 40"
Depth with Doors Open at 90°	55.5"	52.5"	58.5"
Interior Door Opening Width	22.75"	19.5"	25.5"
Interior Door Opening Height	23"	23"	23"
Adjustable Shelves	1	2	2
Shelf Dimensions (W x D)	22" x 16"	21.38" x 16"	27.25" x 16"
Crated Shipping Weight	185 lbs.	273 lbs.	324 lbs.
Crated Shipping Dimensions (L x W x H)	34" x 31.5" x 40.5"	52.5" x 34" x 40.5"	62.5" x 34" x 40.5"
Voltage	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.4	3.6	4
HACR Breaker (AMP)	15	15	15
Energy Consumption (kWh / day) ASHRAE	2.4	3.6	3.95
Heat Rejection (BTU / hr)	489	756	727
Voltage Range	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	-10° - +10°F	-10° - +10°F	-10° - +10°F
Refrigerant	R290	R290	R290
List F.O.B. Griffin	<b>\$7,180</b> <b>**\$7,550</b>	<b>\$10,530</b> <b>**\$10,980</b>	<b>\$12,690</b> <b>**\$13,410</b>

**\*\*SPECIAL ORDER - Please contact your local HOSHIZAKI Sales Representative for availability.**  
See Refrigeration Accessories on pages 84-89 for options and prices



# WORKTOP REFRIGERATORS with DRAWERS



**WR27B-D2**



**WR48B-D4**



**WR60B-D4**



**WR72B-D6**

- Stainless steel interior and exterior front, sides and top
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Heavy duty drawers with removeable gaskets
- 6" Stem casters standard
- Electronic controls

Model Number	WR27B-D2	WR48B-D4	WR60B-D4	WR72B-D6
Interior Storage Capacity (AHAM)	6.21 ft <sup>3</sup>	12 ft <sup>3</sup>	15.1 ft <sup>3</sup>	18 ft <sup>3</sup>
Overall Dimensions (W x D x H including 6" casters)	27" x 30" x 40"	48" x 30" x 40"	62.5" x 34" x 40.5"	72" x 30" x 40"
Depth with Drawer Fully Open	51"	52"	52"	52"
Drawer Opening Width x Height	22.75" x 23"	19.5" x 23"	25.5" x 23"	19.5" x 23"
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep
Crated Shipping Weight	214 lbs.	332 lbs.	381 lbs.	460 lbs.
Crated Shipping Dimensions (L x W x H)	34" x 31.5" x 40.5"	52.5" x 34" x 40.5"	62.5" x 34" x 40.5"	73.75" x 32" x 40.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	3	3	3	3
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	0.65	1.05	1.75	1.12
Heat Rejection (BTU / hr)	152	278	249	360
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	<b>\$9,250</b>	<b>\$14,910</b>	<b>\$17,230</b>	<b>\$22,100</b>

See Refrigeration Accessories on pages 84-89 for options and prices



# WORKTOP FREEZERS with DRAWERS



**WF27B-D2**



**WF48B-D4**

- Stainless steel interior and exterior front, sides and top
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- 6" Stem casters standard
- Heavy duty drawers with removeable gaskets
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Electronic controls

Model Number	WF27B-D2	WF48B-D4
Interior Storage Capacity (AHAM)	6.21 ft <sup>3</sup>	12 ft <sup>3</sup>
Overall Dimensions (W x D x H including 6" casters)	27" x 30" x 40"	48" x 30" x 40"
Depth with Drawer Fully Open	51"	52"
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 Size and (1) 1/3 Size, 6" deep
Crated Shipping Weight	218 lbs.	346 lbs.
Crated Shipping Dimensions (L x W x H)	34" x 31.5" x 40.5"	52.5" x 34" x 40.5"
Voltage	115V/60/1	115V/60/1
Amperage (AMP)	3	4
HACR Breaker (AMP)	15	15
Energy Consumption (kWh / day) ASHRAE	2.4	3.60
Heat Rejection (BTU / hr)	489	756
Voltage Range	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F
Temperature Range	-10° - +10°F	-10° - +10°F
Refrigerant	R290	R290
List F.O.B. Griffin	<b>\$10,940</b>	<b>\$16,460</b>

See Refrigeration Accessories on pages 84-89 for options and prices

# DRAWER / DOOR COMBINATION REFRIGERATORS



**UR48B-D2**



**UR60B-D2**



**WR48B-D2**



**WR60B-D2**

- Stainless steel interior and exterior front sides and top
- Door/Drawer configuration can be located in any cabinet section
- Engineered to maintain NSF-7 temperatures in 100°F ambient.
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- Enamel coated evaporator coil
- Field reversible doors

Model Number	UR48B-D2	UR60B-D2	WR48B-D2	WR60B-D2
Interior Storage Capacity (AHAM)	12 ft <sup>3</sup>	15.38 ft <sup>3</sup>	12 ft <sup>3</sup>	15.38 ft <sup>3</sup>
Overall Dimensions (L x W x H)	48" x 30" x 33.75" (including 4" casters)	60" x 30" x 33.63" (including 4" casters)	48" x 30" x 40" (including 6" casters)	60" x 30" x 40" (including 6" casters)
Depth With Door Open At 90°	51.5"	58.5"	51.5"	58.5"
Depth With Drawer Fully Open	52"	51"	52.5"	51"
Door Opening Width x Height	19.5" x 23"	25.5" x 23"	19.5" x 23"	25.5" x 23"
Shelves (#) / Dimensions(W x D)	(1) / 21.5" x 16"	(1) / 27.25" x 16"	(1) / 21.5" x 16"	(1) / 27.25" x 16"
Drawer Pan Capacity (pans by others)	(1) 1/2 and (1) 1/3 size pans, 6" deep	(1) full size pan, 6" deep	(1) 1/2 and (1) 1/3 size pans, 6" deep	(1) full size pan, 6" deep
Crated Shipping Weight	282 lbs.	288 lbs.	295 lbs.	340 lbs.
Crated Shipping Dimensions (L x W x H)	52.5" x 32" x 36.5"	62.5" x 34" x 36.5"	52.5" x 34" x 40.5"	62" x 34" x 40.25"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	3	3.3	3	3.3
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	1.05	2.6	1.05	2.6
Heat Rejection (BTU / hr)	278	370	278	370
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° -100°F	45° -100°F	45° -100°F	45° -100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290
List F. O. B. Griffin	<b>\$11,630</b>	<b>\$12,940</b>	<b>\$11,940</b>	<b>\$13,280</b>

Made to order: Allow 4-6 week lead time. Door and drawer configuration is customizable. See Refrigeration Accessories on pages 84-89 for options and prices

Please check with your distributor for availability.



# PREP TABLES SANDWICH TOP REFRIGERATORS



**SR27B-8**



**SR36B-10**



**SR48B-8**



**SR48B-12**

- Stainless steel interior and exterior front, sides and top
- Provided with full complement of polycarbonate plastic 1/6th size pans 4" deep
- Engineered to maintain NSF-7 temperatures in 100°F ambient.
- Cabinet and doors are insulated with 2" foamed-in-place polyurethane
- 1/2" x 10" Cutting board standard
- Field reversible doors

Model Number	SR27B-8	SR36B-10	SR48B-8	SR48B-12
Interior Storage Capacity (AHAM)	6.21 ft <sup>3</sup>	8.7 ft <sup>3</sup>	12 ft <sup>3</sup>	12 ft <sup>3</sup>
Overall Dimensions (W x D x H including 6" casters)	27" x 30" x 44.25"	36" x 30" x 44.25"	48" x 34" x 44.25"	48" x 34" x 44.25"
Depth with Cutting Board installed	30.5"	30.5"	30.5"	30.5"
Depth with Doors Open at 90°	55.5"	57.5"	52.5"	52.5"
Interior Door Opening Width	22.75"	25.5"	19.5"	19.5"
Interior Door Opening Height	23"	23"	23"	23"
Adjustable Shelves	1	1	2	2
Shelf Dimensions (W x D)	22" x 16"	31" x 16"	21.25" x 16"	21.25" x 16"
Pan Capacity (# of 1/6 size x 4" deep)	8	10	8	12
Crated Shipping Weight	202 lbs.	245 lbs.	292 lbs.	301 lbs.
Crated Shipping Dimensions (L x W x H)	32" x 31.5" x 46.5"	40.5" x 32" x 46.5"	52.5" x 36" x 46.5"	52.5" x 36" x 46.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.3	2.7	3	3
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) NSF	2.54	2.6	2.38	2.38
Heat Rejection (BTU / hr)	361	364.1	403	403
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	<b>\$6,830</b>	<b>\$9,430</b>	<b>\$9,300</b>	<b>\$10,470</b>

See Refrigeration Accessories on pages 84-89 for options and prices



# PREP TABLES SANDWICH TOP REFRIGERATORS



- Stainless steel interior and exterior front, sides and top
- Provided with full complement of polycarbonate plastic 1/6th size pans 4" deep
- Engineered to maintain NSF-7 temperatures in 100°F ambient.
- Cabinet and doors are insulated with 2" foamed-in-place polyurethane
- 1/2" x 10" Cutting board standard
- Field reversible doors

Model Number	SR60B-8	SR60B-12	SR60B-16	SR72B-12	SR72B-16	SR72B-18
Interior Storage Capacity (AHAM)	14.8 ft <sup>3</sup>	14.8 ft <sup>3</sup>	14.8 ft <sup>3</sup>	18 ft <sup>3</sup>	18 ft <sup>3</sup>	18 ft <sup>3</sup>
Overall Dimensions (W x D x H including 6" casters)	60" x 30" x 44.25"	60" x 30" x 44.25"	60" x 30" x 44.25"	72" x 30" x 44.25"	72" x 30" x 44.25"	72" x 30" x 44.25"
Depth with Cutting Board installed	30.5"	30.5"	30.5"	30.5"	30.5"	30.5"
Depth with Doors Open at 90°	58.5"	58.5"	58.5"	52.5"	52.5"	52.5"
Interior Door Opening Width	25.5"	25.5"	25.5"	19.5"	19.5"	19.5"
Interior Door Opening Height	23"	23"	23"	23"	23"	23"
Adjustable Shelves	2	2	2	2	2	2
Shelf Dimensions (W x D)	27.25" x 16"	27.25" x 16"	27.25" x 16"	22" x 16"	22" x 16"	22" x 16"
Pan Capacity (# of 1/6 size x 4" deep)	8	12	16	12	16	18
Crated Shipping Weight	346 lbs.	348 lbs.	359 lbs.	404 lbs.	406 lbs.	419 lbs.
Crated Shipping Dimensions (L x W x H)	61.75" X 32" X 46.5"	61.75" X 32" X 46.5"	61.75" X 32" X 46.5"	73.75" x 32" x 46.5"	74" x 34" x 46"	74" x 34" x 46"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	4	4	4	4	4	4
HACR Breaker (AMP)	15	15	15	15	15	15
Energy Consumption (kWh / day) NSF	4	4	4	5.05	5.05	5.05
Heat Rejection (BTU / hr)	575	575	575	719	876	876
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290	R290	R290
List F. O. B. Griffin	<b>\$11,340</b>	<b>\$11,530</b>	<b>\$11,210</b>	<b>\$13,360</b>	<b>\$13,470</b>	<b>\$12,830</b>

See Refrigeration Accessories on pages 84-89 for options and prices



**STEELHEART**

# PREP TABLES - SANDWICH TOP REFRIGERATORS with DRAWERS



**SR27B-8D2**



**SR48B-12D4**



**SR48B-12D2\*\***

- Stainless steel interior and exterior front, sides and top
- Provided with full complement of polycarbonate plastic 1/6th size pans 4" deep
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- 1/2" x 10" Cutting board standard
- 6" Stem casters standard

Model Number	SR27B-8D2	SR48B-12D4	SR48B-12D2
Interior Storage Capacity (AHAM)	6.22 ft <sup>3</sup>	12 ft <sup>3</sup>	12 ft <sup>3</sup>
Overall Dimensions (W x D x H including 6" casters)	27" x 30" x 44.25"	48" x 34" x 44.25"	48" x 34" x 44.25"
Depth With Cutting Board Installed	30.5"	3.5"	30.5"
Depth With Door Open At 90°	N/A	N/A	52.5"
Depth With Drawer Fully Open	52"	52"	52"
Door/Drawer Opening Width	19.5"	19.5"	19.5"
Adjustable Shelves / Shelf Dimensions (WxD)	N/A	N/A	(1) 21.25" x 16"
Drawer Pan Capacity (pans by others)	(1) 12 x 20 full size pan and (2) ¼ size pans. Bottom drawer will accommodate (1) full size pan.	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep	(1) 1/2 and (1) 1/3 size pans 6" deep
Pan Capacity (# of 1/6 size x 4" deep)	8 (6" max. pan depth)	12 (6" max. pan depth)	12 (6" max. pan depth)
Crated Shipping Weight	242 lbs	382 lbs.	355 lbs.
Crated Shipping Dimensions (L x W x H)	32"x 31.5" x 46.5"	52.5" x 36" x 46.5"	52.5" x 36" x 46.5"
Voltage	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.3	3	3
HACR Breaker (AMP)	15	15	15
Energy Consumption (kWh / day) NSF	2.54	2.83	2.83
Heat Rejection (BTU / hr)	361	403	403
Voltage Range	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° -100°F
Temperature Range	32° -52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290
List F. O. B. Griffin	<b>\$10,420</b>	<b>\$16,230</b>	<b>\$14,020</b>

\*\*Made to order: Allow 4-6 week lead time. Door and drawer configuration is customizable. See Refrigeration Accessories on pages 84-89 for options and prices



# PREP TABLES MEGA TOP REFRIGERATORS

STEELHEART



SR27B-12M



SR36B-15M



SR48B-12M



SR48B-18M

- Stainless steel interior and exterior front, sides and top
- Provided with full complement of polycarbonate plastic 1/6th size pans
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Cabinet and doors insulated with 2" foamed-in-place polyurethane
- 1/2" x 10" Cutting board with extended top for greater stability
- 6" Stem casters standard

Model Number	SR27B-12M	SR36B-15M	SR48B-12M	SR48B-18M
Interior Storage Capacity (AHAM)	6.22 ft <sup>3</sup>	8.7 ft <sup>3</sup>	12 ft <sup>3</sup>	11.95 ft <sup>3</sup>
Overall Dimensions (W x D x H including 6" casters)	27" x 34" x 44.25"	36" x 34" x 44.25"	48" x 34" x 44.25"	48" x 34" x 44.25"
Depth with Cutting Board installed	36.5"	36.5"	36.5"	36.5"
Depth with Doors Open at 90°	52.5"	58.5"	52.5"	52.5"
Interior Door Opening Width	22.75"	25.5"	19.5"	19.5"
Interior Door Opening Height	23"	23"	23"	23"
Adjustable Shelves	1	1	2	2
Shelf Dimensions (W x D)	22" x 16"	31" x 16"	21.5" x 16"	21.2" x 16"
Pan Capacity (# of 1/6 size x 4" deep)	12	15	12	18
Crated Shipping Weight	217 lbs.	258 lbs.	303 lbs.	315 lbs.
Crated Shipping Dimensions (L x W x H)	36" x 31.5" x 46.5"	40.5" x 36" x 46.5"	52.5" x 36" x 46.5"	52.5" x 36" x 46.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.3	2.3	3	3
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) NSF	2.54	1.82	2.83	2.83
Heat Rejection (BTU / hr)	261	258	403	403
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	<b>\$7,980</b>	<b>\$10,250</b>	<b>\$11,800</b>	<b>\$11,600</b>

See Refrigeration Accessories on pages 84-89 for options and prices



# PREP TABLES MEGA TOP REFRIGERATORS



- Stainless steel interior and exterior front, sides and top
- Provided with full complement of polycarbonate plastic 1/6th size pans
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Cabinet and doors are insulated with 2" foamed-in-place polyurethane
- 1/2" x 10" Cutting board with extended top for greater stability
- 6" Stem casters standard

Model Number	SR60B-12M	SR60B-18M	SR60B-24M	SR72B-18M	SR72B-24M	SR72B-30M
Interior Storage Capacity (AHAM)	14.8 ft <sup>3</sup>	14.8 ft <sup>3</sup>	14.8 ft <sup>3</sup>	18 ft <sup>3</sup>	18 ft <sup>3</sup>	18 ft <sup>3</sup>
Overall Dimensions (W x D x H including 6" casters)	60" x 34" x 44.25"	60" x 34" x 44.25"	60" x 34" x 44.25"	72" x 34" x 44.25"	72" x 34" x 44.25"	72" x 34" x 44.25"
Depth With Cutting Board Installed	37.3"	37.3"	37.3"	37.5"	37.5"	37.5"
Depth With Doors Open At 90°	58.5"	58.5"	58.5"	52.5"	52.5"	52.5"
Interior Door Opening Width	25.5"	25.5"	25.5"	19.5"	19.5"	19.5"
Interior Door Opening Height	23"	23"	23"	23"	23"	23"
Adjustable Shelves	2	2	2	2	2	2
Shelf Dimensions (W x D)	27.25" x 16"	27.25" x 16"	27.25" x 16"	22" x 16"	22" x 16"	22" x 16"
Pan Capacity (# of 1/6 size x 4" deep)	12	18	24	18	24	30
Crated Shipping Weight	346 lbs.	368 lbs.	383 lbs.	418 lbs.	435 lbs.	449 lbs.
Crated Shipping Dimensions (L x W x H)	61.75" x 36" x 46"	61.75" x 36" x 46"	61.75" x 36" x 46"	73.75" x 36" x 4.5"	73.75" x 36" x 46"	73.75" x 36" x 46"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	4	4	4	4	4	4
HACR Breaker (AMP)	15	15	15	15	15	15
Energy Consumption (kWh / day) NSF	4.05	4.05	4.05	4.77	4.77	4.77
Heat Rejection (BTU / hr)	575	575	575	719	719	719
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290	R290	R290
List F.O.B. Griffin	<b>\$13,360</b>	<b>\$13,510</b>	<b>\$13,000</b>	<b>\$15,400</b>	<b>\$15,650</b>	<b>\$14,850</b>

See Refrigeration Accessories on pages 84-89 for options and prices



# PREP TABLES - MEGA TOP REFRIGERATORS with DRAWERS



SR27B-12MD2



SR48B-18MD4



SR60B-24MD4



SR72B-30MD6

- Stainless steel interior and exterior front, sides and top
- Provided with full complement of polycarbonate plastic 1/6th size pans 4" deep
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- 1/2" x 10" Cutting board with extended top for greater stability
- 6" Stem casters standard

Model Number	SR27B-12MD2	SR48B-18MD4	SR60B-24MD4	SR72B-30MD6
Interior Storage Capacity (AHAM)	6.22 ft <sup>3</sup>	12 ft <sup>3</sup>	15.4 ft <sup>3</sup>	18 ft <sup>3</sup>
Overall Dimensions (W x D x H including 6" casters)	27" x 34" x 44.25"	48" x 34" x 44.25"	60" x 34" x 44.25"	72" x 34" x 44.25"
Depth With Cutting Board Installed	37.3"	36.5"	37.5"	37.35
Depth With Drawer Fully Open	52"	52"	52"	52"
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep
Pan Capacity (# of 1/6 size x 4" deep)	12 (6" max. pan depth)	18 (6" max. pan depth)	24 (6" max. pan depth)	30 (6" max. pan depth)
Crated Shipping Weight	250 lbs.	382 lbs.	457 lbs.	539 lbs.
Crated Shipping Dimensions (L x W x H)	36" x 29" x 46"	52.5" x 36" x 46.5"	62.5" x 36" x 46.5"	73.75" x 36" x 46.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.4	3	4	4
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) NSF	1.9	2.83	4.05	5.05
Heat Rejection (BTU / hr)	270	403	575	719
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° -100°F	45° -100°F	45° -100°F	45° -100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290
List F. O. B. Griffin	<b>\$12,340</b>	<b>\$17,980</b>	<b>\$21,080</b>	<b>\$25,790</b>

See Refrigeration Accessories on pages 84-89 for options and prices



# PREP TABLES - MEGA TOP DRAWER / DOOR COMBINATIONS



**SR48B-18MD2**



**SR60B-24MD2**



**SR72B-30MD2**



**SR72B-30MD4**

- Stainless steel interior and exterior front sides and top
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Provided with full complement of polycarbonate plastic 1/6th size pans 4" deep
- Door/Drawer configuration can be located in any cabinet section
- Field reversible doors

Model Number	SR48B-18MD2	SR60B-24MD2	SR72B-30MD2	SR72B-30MD4
Interior Storage Capacity (AHAM)	12 ft <sup>3</sup>	14.8 ft <sup>3</sup>	18 ft <sup>3</sup>	18 ft <sup>3</sup>
Overall Dimensions (W x D x H including 6" casters)	48" x 34" x 44.25"	60" x 34" x 44.25"	72" x 34" x 44.25"	72" x 34" x 44.25"
Depth with Cutting Board installed	36.5"	37.5"	37.3"	37.3"
Depth with Door Open at 90°	52"	58.5"	52.5"	52.5"
Depth With Drawer Fully Open	52.5"	52"	52"	52"
Shelves (#) / Dimensions (WxD)	(1) / 21.25" x 16"	(1) / 27.25" x 16"	(2) / 22" x 16"	(1) / 22" x 16"
Drawer Pan Capacity (pans by others)	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep	(1) full size pan 6" deep	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep
Pan Capacity (# of 1/6 size x 4" deep)	18 (6" max. pan depth)	24 (6" max. pan depth)	30 (6" max. pan depth)	30 (6" max. pan depth)
Crated Shipping Weight	355 lbs.	420 lbs.	475 lbs.	510 lbs.
Crated Shipping Dimensions (L x W x H)	52.5" x 36" x 46.5"	62.5" x 36" x 46.5"	73.75" x 36" x 46.5"	73.75" x 36" x 46.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	3	4	4	4
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) NSF	2.83	4.05	5.05	5.05
Heat Rejection (BTU / hr)	403	575	719	719
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° -100°F	45° -100°F	45° -100°F	45° -100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	<b>\$15,290</b>	<b>\$18,940</b>	<b>\$20,710</b>	<b>\$23,130</b>

Made to order: Allow 4-6 week lead time. Door and drawer configuration is customizable. See Refrigeration Accessories on pages 84-89 for options and prices

Please check with your distributor for availability.



# PREP TABLES - PIZZA REFRIGERATORS



PR46B



PR60B



PR67A



PR93A

- Stainless steel interior and exterior front, sides and top
- Solid state digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Adjustable ducted air distribution for rail/cabinet
- Full complement of 1/3rd size pans are standard
- 1/2" x 19" Cutting board standard

Model Number	PR46B	PR60B	PR67A	PR93A
Interior Storage Capacity (AHAM)	11.23 ft <sup>3</sup>	16.63 ft <sup>3</sup>	19.9 ft <sup>3</sup>	30.0 ft <sup>3</sup>
Overall Dimensions (W x D x H including 6" casters)	46" x 32.25" x 43.25"	60" x 32.25" x 43.25"	67" x 32.25" x 43.5"	93" x 32.25" x 43.5"
Depth with Cutting Board installed	36.25"	36.25"	35"	35"
Depth with Doors Open at 90°	59.5"	53.75"	56.75"	56.75"
Interior Door Opening Width	25.5"	19.5"	22.5"	22.5"
Interior Door Opening Height	23"	23"	23"	23"
Adjustable Shelves	2	4	4	6
Shelf Dimensions (W X D)	28.75" x 25.5"	21.5" x 25.5"	24.75" x 25.5"	24.75" x 25.5"
Pan Capacity (# of 1/3 size x 4" deep)	6 (6" max. pan depth)	8 (6" max. pan depth)	9 (6" max. pan depth)	12 (6" max. pan depth)
Crated Shipping Weight	336 lbs.	410 lbs.	420 lbs.	577 lbs.
Crated Shipping Dimensions (L x W x H)	48.75" x 34.75" x 45"	63.75" x 35.75" x 45"	69" x 34.75" x 45"	95" x 34.75" x 45"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	6	4	6	6.5
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) NSF	5.69	5.63	5.4	6.2
Heat Rejection (BTU / hr)	808	801	767	877
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° -100°F	45° -100°F	45° -100°F	45° -100°F
Control Set Point Range	16° to 36°F (rail) / 28° to 40°F (cabin)	16° to 36°F (rail) / 28° to 40°F (cabin)	14° - 45°F	14° - 45°F
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	<b>\$13,030</b>	<b>\$17,000</b>	<b>\$18,050</b>	<b>\$23,500</b>

See Refrigeration Accessories on pages 84-89 for options and prices



# PREP TABLES - PIZZA REFRIGERATORS with DRAWERS



**PR46B-D2**



**PR60B-D4**



**PR67A-D4**



**PR93A-D6**

- Stainless steel interior and exterior front, sides and top
- Solid state digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- Provided with full complement of polycarbonate plastic 1/3rd size pans 4" deep
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Adjustable ducted air distribution for rail/cabinet
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- 1/2" x 19" Cutting board standard

Model Number	PR46B-D2	PR60B-D4	PR67A-D4	PR93A-D6
Interior Storage Capacity (AHAM)	11.23 ft <sup>3</sup>	16.63 ft <sup>3</sup>	19.9 ft <sup>3</sup>	30.0 ft <sup>3</sup>
Overall Dimensions (W x D x H including casters)	46" x 32.25" x 43.25"	60" x 33.25" x 43.25"	67" x 32.25" x 43.5"	93" x 32.25" x 43.5"
Depth with Cutting Board installed	36.25"	36.25"	36"	36"
Depth with Drawer Fully Open	57.5"	53.75"	56.5"	56.5"
Drawer Pan Capacity (pans by others)	(2) 12" x 20" x 6" deep pans	(2) 12" x 20" x 6" deep pans	(2) 12" x 20" x 6" deep pans	(2) 12" x 20" x 6" deep pans
Pan Capacity (# of 1/3 size x 4" deep)	6	8	9	12
Crated Shipping Weight	383 lbs.	450 lbs.	505 lbs.	693 lbs.
Crated Shipping Dimensions (L x W x H)	48.75" x 34.75" x 45"	63.75" x 35.75" x 45"	69" x 34.75" x 45"	95" x 34.75" x 45"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	4	4	6	6.5
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) NSF	5.69	5.63	5.4	6.2
Heat Rejection (BTU / hr)	808	801	767	877
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° -100°F	45° -100°F	45° -100°F	45° -100°F
Control Set Point Range	16° to 36°F (rail) / 28° to 40°F (cabin)	16° to 36°F (rail) / 28° to 40°F (cabin)	14° - 45°F	14° - 45°F
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	<b>\$16,540</b>	<b>\$18,700</b>	<b>\$25,010</b>	<b>\$34,540</b>

See Refrigeration Accessories on pages 84-89 for options and prices



# PREP TABLES - PIZZA DRAWER / DOOR COMBINATIONS



**PR67A-D2**



**PR93A-D2**



**PR93A-D4**

- Stainless steel interior and exterior front sides and top
- Provided with full complement of polycarbonate plastic 1/3rd size pans 4" deep
- Enamel coated evaporator coil
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- Door/Drawer configuration can be located in any cabinet section
- Adjustable ducted air distribution for rail/cabinet

Model Number	PR67A-D2	PR93A-D2	PR93A-D4
Interior Storage Capacity (AHAM)	19.9 ft <sup>3</sup>	30 ft <sup>3</sup>	30 ft <sup>3</sup>
Overall Dimensions (W x D x H including 6" casters)	67" x 32.25" x 43.5"	93" x 32.25" x 43.5"	93" x 32.25" x 43.5"
Depth with Cutting Board installed	35"	35"	35"
Depth with Door Open at 90°	56.75"	56.75"	56.75"
Depth with Drawer Fully Open	56.5"	56.5"	56.5"
Door Opening Width	22.5"	22.5"	22.5"
Door Opening Height	23"	23"	23"
Shelves (#) / Dimensions (WxD)	(2) / 24.75" x 25.5"	(4) / 24.75" x 25.5"	(2) / 24.75" x 25.5"
Drawer Pan Capacity (pans by others)	(2) 12" x 20" x 6" deep pans	(2) 12" x 20" x 6" deep pans	(2) 12" x 20" x 6" deep pans
Pan Capacity (# of 1/3 size x 4" deep)	9	12	12
Crated Shipping Weight	465 lbs.	616 lbs.	654 lbs.
Crated Shipping Dimensions (L x W x H)	70" x 36" x 45"	95" x 34.75" x 45"	95" x 34.75" x 45"
Voltage	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	6	6.5	6.5
HACR Breaker (AMP)	15	15	15
Energy Consumption (kWh / day) NSF	5.4	6.2	6.2
Heat Rejection (BTU / hr)	767	877	877
Voltage Range	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	14° - 45°F	14° - 45°F	14° - 45°F
Refrigerant	R290	R290	R290
List F. O. B. Griffin	<b>\$21,520</b>	<b>\$27,550</b>	<b>\$31,230</b>

Made to order: Allow 4-6 week lead time. Door and drawer configuration is customizable. See Refrigeration Accessories on pages 84-89 for options and prices

Please check with your distributor for availability.





# REFRIGERATED EQUIPMENT STANDS



CR36A



CR49A



CR60A



CR72A



CR85A



CR98A



CR110A

- Stainless steel interior and exterior front, sides and top
- 16 gauge stainless steel top with marine edge front and rear and 1" turn-up at each end
- Solid state digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- Top is provided with an exclusive, built in, ceramic heat shield
- Standard with (4-8) 4" casters all with brakes
- Electronic controls

Model Number	CR36A	CR49A	CR60A	CR72A	CR85A	CR98A	CR110A
<b>Overall Dimensions (W x D x H including 4" casters)</b>	36.5" x 32.25" x 26"	49" x 32.25" x 26"	60.5" x 32.25" x 26"	72.52" x 32.25" x 26"	85" x 32.25" x 26"	98" x 32.25" x 26"	110.5" x 32.25" x 26"
<b>Depth with Drawer Fully Open</b>	55.75"	55.75"	55.75"	55.75"	55.75"	55.75"	55.75"
<b>Maximum Pan Depth</b>	6"	6"	6"	6"	6"	6"	6"
<b>Worktop Maximum Load Capacity</b>	700 lbs	700 lbs	700 lbs	1200 lbs	1200 lbs	1500 lbs	1500 lbs
<b>Drawer Pan Capacity (pans by others)</b>	(1) 12" x 20" x 6" deep pans and (1) 1/2 long pan 6" deep (pans by others)	(2) 12" x 20" x 6" deep pans	(2) 12" x 20" x 6" deep pans	(2) 12" x 20" x 6" deep pans	Left drawers: (3) 12" x 20" x 6" deep pans Right drawers: (2) 12" x 20" x 6" deep pans	(3) 12" x 20" x 6" deep pans	(3) 12" x 20" x 6" deep pans
<b>Pan Capacity (12" x 20")</b>	2	2.5	2.5	8	10	12	12
<b>Crated Shipping Weight</b>	295 lbs.	327 lbs.	370 lbs.	500 lbs.	567 lbs.	640 lbs.	595 lbs.
<b>Crated Shipping Dimensions (L x W x H)</b>	38" x 34.5" x 30.5"	51" x 35.5" x 30.5"	62" x 35.5" x 30.5"	74" x 34.5" x 30.5"	87.25" x 34.5" x 30.5"	100" x 34.5" x 30.5"	112.5" x 34.5" x 30.5"
<b>Voltage</b>	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
<b>Amperage (AMP)</b>	2.2	2.7	2.7	3.0	3.0	3.0	3.0
<b>HACR Breaker (AMP)</b>	15	15	15	15	15	15	15
<b>Energy Consumption (kWh / day) NSF</b>	1.6	2.1	2.1	2.78	2.9	3.69	3.69
<b>Heat Rejection (BTU / hr) @ NSF</b>	223	303	303	395	415	525	525
<b>Voltage Range</b>	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
<b>Ambient Temp. Range</b>	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
<b>Control Set Point Range</b>	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
<b>Refrigerant</b>	R290	R290	R290	R290	R290	R290	R290
<b>List F.O.B. Griffin</b>	<b>\$17,630</b>	<b>\$19,220</b>	<b>\$19,940</b>	<b>\$22,900</b>	<b>\$26,680</b>	<b>\$29,700</b>	<b>\$30,620</b>

See Refrigeration Accessories on pages 84-89 for options and prices



# SUSHI CASES

## Features & Benefits of HOSHIZAKI Sushi Cases

- Energy efficient LED lights with on/off switch
- Elegant curved front glass design enhances product on display
- Condenser airflow comes in the back and out the side
- Large diameter 1" drain at front, vinyl hose included
- NSF approved thermometer
- Easy to clean ceiling
- Plate space on top of unit, 5.6 inches
- Larger front to back interior, 11 inches
- Interior floor has a radius at all four sides
- Self-contained refrigeration unit - easy to install
- Large diameter upper evaporator with tin plating
- Slightly taller doors with plastic seal at end, opposite of the handle
- Solid food plates with radius groove to fit sushi foods
- Energy-efficient and environmentally friendly R600a refrigerant



Model Number	Condenser	Refrigeration Unit Location (Front View)	Dimensions W x D x H	Shipping Dimensions W x D x H	Electrical	Shipping Weight	List F.O.B. Griffin
<b>HNC-120BA-R-SLH</b>	Air-Cooled	Right Side	47.2" x 13.6" x 11"	51.5" x 16.5" x 20.5"	115V/60/1	92 Lbs.	<b>\$6,250</b>
<b>HNC-120BA-L-SLH</b>	Air-Cooled	Left Side	47.2" x 13.6" x 11"	51.5" x 16.5" x 20.5"	115V/60/1	94 Lbs.	<b>\$6,250</b>
<b>HNC-150BA-R-SLH</b>	Air-Cooled	Right Side	59.1" x 13.6" x 11"	62.25" x 16.5" x 20.5"	115V/60/1	115 Lbs.	<b>\$6,750</b>
<b>HNC-150BA-L-SLH</b>	Air-Cooled	Left Side	59.1" x 13.6" x 11"	62.25" x 16.5" x 20.5"	115V/60/1	115 Lbs.	<b>\$6,750</b>
<b>HNC-180BA-R-SLH</b>	Air-Cooled	Right Side	70.9" x 13.6" x 11"	74" x 16.5" x 20.5"	115V/60/1	130 Lbs.	<b>\$7,540</b>
<b>HNC-180BA-L-SLH</b>	Air-Cooled	Left Side	70.9" x 13.6" x 11"	74" x 16.5" x 20.5"	115V/60/1	130 Lbs.	<b>\$7,540</b>
<b>HNC-210BA-R-SLH</b>	Air-Cooled	Right Side	82.7" x 13.6" x 11"	85.75" x 16.5" x 20.5"	115V/60/1	145 Lbs.	<b>\$8,340</b>
<b>HNC-210BA-L-SLH</b>	Air-Cooled	Left Side	82.7" x 13.6" x 11"	85.75" x 16.5" x 20.5"	115V/60/1	145 Lbs.	<b>\$8,340</b>


"R" - Condensing Unit is on RIGHT from front view

"L" - Condensing Unit is on LEFT from front view


Not intended for overnight storage. NSF Standard 7




**HNC-120BA-L-SLH**

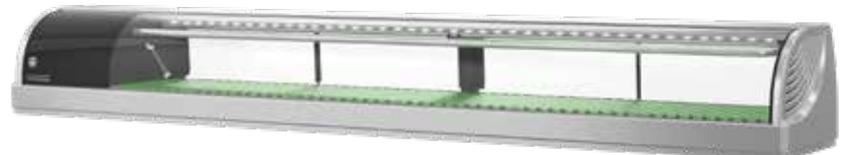

**HNC-210BA-L-SLH**

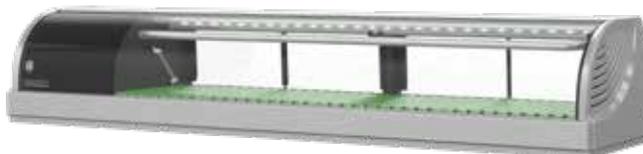

**HNC-150BA-L-SLH**

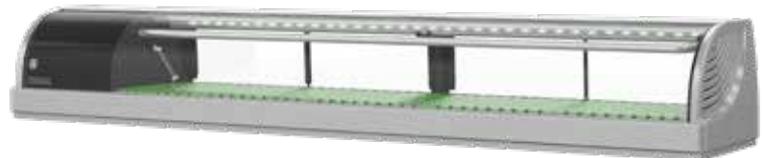

**HNC-180BA-L-SLH**



# GLASS DOOR MERCHANDISERS



**RM-7-HC**      **RM-10-HC** **ENERGY STAR** **Qualified**      **RM-26-HC** **ENERGY STAR** **Qualified**      **RM-45-SD-HC** (Sliding doors)      **RM-49-HC**      **RM-65-HC**

- Environmentally friendly R290 hydrocarbon refrigerant
- Forced air evaporator for quick temperature pull down
- Large glass door(s) is energy efficient low-E multi pane glass
- Doors mounted on heavy duty hinges with self-closing mechanism
- Three year parts and labor warranty & Five year compressor warranty
- Locks on doors are standard (accept for RM-7-HC)

Model Number	RM-7-HC	RM-10-HC	RM-26-HC	RM-45-SD-HC	RM-49-HC	RM-65-HC
<b>Capacity</b>	20 oz. bottles: 102 12 oz. cans: 217	20 oz. bottles: 168 12 oz. cans: 384	20 oz. bottles: 360 12 oz. cans: 900	20 oz. bottles: 560 12 oz. cans: 1260	20 oz. bottles: 630 12 oz. cans: 1440	20 oz. bottles: 830 12 oz. cans: 1926
<b>Overall Dimensions (W x D x H Including Leveling Feet)</b>	21.25" x 25" x 37.75"	25" x 22.75" x 54.5"	30" x 29.75" x 78"	51" x 30.25" x 78.25"	60" x 29.75" x 78"	78" x 29.75" x 78"
<b>Adjustable Shelves</b>	2 adjustable, 1 floor shelf	3	5	5 per section	5 per section	5 per section
<b>Shelf Dimensions (W x D)</b>	17.75" x 20.75" 18" x 9.25" (Floor)	21" x 17.5"	25.75" x 24"	23" x 20.5"	27" x 21.75"	(C) 27.3" x 21.7" (L/R) 22.4" x 21.7"
<b>Crated Shipping Weight</b>	180 lbs.	230 lbs.	331 lbs.	520 lbs.	610 lbs.	800 lbs.
<b>Crated Shipping Dimensions (L x W x H)</b>	28" x 25" x 44"	30" x 30" x 60"	34" x 34" x 82"	54" x 32.25" x 84"	63" x 32.5" x 86"	81" x 32.25" x 84"
<b>Voltage</b>	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
<b>Amperage (AMP)</b>	3.2	1.8	3.2	6.5	7.6	8.2
<b>HACR Breaker (AMP)</b>	15	15	15	15	15	15
<b>Energy Consumption (kWh / day) ENERGY STAR / DOE</b>	1.38	1.1	1.81	4.55	4.37	5.67
<b>Approx. Nominal Compress BTU/HR (HP)</b>	1/8HP	1/5HP	1/3HP	1/2HP	1/2HP	(L) 1/3HP (R) 1/3HP
<b>Voltage Range</b>	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
<b>Ambient Temp. Range</b>	60° - 86°F	60° - 86°F	60° - 86°F	60° - 86°F	60° - 86°F	60° - 86°F
<b>Control Set Point Range</b>	28° - 40°F	28° - 40°F	28° - 40°F	28° - 40°F	28° - 40°F	28° - 40°F
<b>Refrigerant</b>	R290	R290	R290	R290	R290	R290
<b>List F.O.B. Griffin</b>	<b>\$5,260</b>	<b>\$5,790</b>	<b>\$7,580</b>	<b>\$11,200</b>	<b>\$11,680</b>	<b>\$15,580</b>

See Refrigeration Accessories on pages 84-89 for options and prices



# BACK BAR REFRIGERATORS



**BB59**



**BB69**



**BB80**



**BB95**

- Stainless steel interior with LED lights
- Heavy duty 18-gauge stainless steel top
- Maximum product storage capacity with the ability to store tall boys three high per section
- Black vinyl coated or stainless steel exterior front, sides, and rear
- Doors come with a stainless steel interior liner are self-closing and include locks
- Engineered to maintain NSF-7 temperatures in 100°F ambient

Model Number	BB59(-S*)	BB69(-S*)	BB80(-S*)	BB95(-S*)
Cabinet Dimensions W x D x H	59.5" x 29" x 36.88"	69.5" x 29" x 36.88"	80" x 29" x 36.88"	95.5" x 29" x 36.88"
Capacity (AHAM) cu ft	18.16 ft <sup>3</sup>	21.8 ft <sup>3</sup>	28.74 ft <sup>3</sup>	32.53 ft <sup>3</sup>
Capacity 12oz. cans	852	1014	1092	1302
Door(s)	2	2	3	3
Shelves	4	4	6	6
Capacity 1/2 Barrels	3	3	4	5
HP	1/3	1/3	1/3	1/3
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.5	2.5	2.5	2.5
NEMA Plug	8 ft. 5-15P	8 ft. 5-15P	8 ft. 5-15P	8 ft. 5-15P
Shipping Dimensions W x D x H	62.5" x 31.25" x 42.75"	72.5" x 31.25" x 42.75"	82.5" x 31.25" x 42.75"	98.5" x 31.25" x 42.75"
Shipping Weight	315 lbs.	350 lbs.	375 lbs.	450 lbs.
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	<b>\$8,150</b> <b>*\$9,700</b>	<b>\$8,910</b> <b>*\$10,410</b>	<b>\$10,290</b> <b>*\$12,940</b>	<b>\$10,470</b> <b>*\$13,130</b>

\*(-S) Stainless Steel Exterior option available - Made to order.  
See Refrigeration Accessories on pages 84-89 for options and prices



# BACK BAR REFRIGERATORS with GLASS DOORS



**BB59-G**



**BB69-G**



**BB80-G**



**BB95-G**

- Stainless steel interior with LED lights
- Heavy duty 18-gauge stainless steel top
- Maximum product storage capacity with the ability to store tall boys three high per section
- Black vinyl coated or stainless steel exterior front, sides, and rear
- Energy efficient Low-E Multi pane glass self-closing doors come standard with barrel locks
- Engineered to maintain NSF-7 temperatures in 100°F ambient

Model Number	BB59-G(-S*)	BB69-G(-S*)	BB80-G(-S*)	BB95-G(S*)
Cabinet Dimensions W x D x H	59.5" x 29" x 36.88"	69.5" x 29" x 36.88"	80" x 29" x 36.88"	95.5" x 29" x 36.88"
Capacity (AHAM) cu ft	18.45 ft <sup>3</sup>	21.80 ft <sup>3</sup>	26.74 ft <sup>3</sup>	32.53 ft <sup>3</sup>
Capacity 12oz. cans	852	1014	1092	1302
Door(s)	2	2	3	3
Shelves	4	4	6	6
Capacity 1/2 Barrels	3	3	4	5
HP	1/3	1/3	1/3	1/3
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.5	2.5	2.5	2.5
NEMA Plug	8 ft. 5-15P	8 ft. 5-15P	8 ft. 5-15P	8 ft. 5-15P
Shipping Dimensions W x D x H	62.5" x 31.25" x 42.75"	72.5" x 31.25" x 42.75"	82.5" x 31.25" x 42.75"	98.5" x 31.25" x 42.75"
Shipping Weight	310 lbs.	345 lbs.	370 lbs.	435 lbs.
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	<b>\$8,540</b> *\$9,850	<b>\$9,640</b> *\$11,200	<b>\$11,380</b> *\$13,290	<b>\$11,590</b> *\$13,920

\*(-S) Stainless Steel Exterior option available - Made to order.  
See Refrigeration Accessories on pages 84-89 for options and prices



# SLIDE TOP BOTTLE COOLERS



**CC50**



**CC65**



**CC80**



**CC95**

- Stainless steel interior
- Heavy duty 18-gauge stainless steel top
- Front breathing, side mount refrigeration is easily accessible by sliding out front for cleaning and service
- Black vinyl coated or stainless steel exterior front, sides, and rear
- Durable stainless steel slide top lids including locks
- Engineered to maintain NSF-7 temperatures in 100°F ambient

Model Number	CC50(-S*)	CC65(-S*)	CC80(-S*)	CC95(-S*)
Cabinet Dimensions† W x D x H	50.5" x 31.25" x 39"	65.5" x 26.5" x 33.38"	80" x 26.5" x 33.38"	95" x 26.5" x 33.38"
Capacity (AHAM) cu ft	14.4 ft³	19.6 ft³	24.67 ft³	27.98 ft³
Capacity 12oz. / 20oz. Cans	704 / 286	890 / 360	1150 / 547	1408 / 672
Lids	2	2	3	3
Bin Dividers	3	4	6	7
HP	1/4	1/3	1/3	1/2
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.0	2.0	2.0	2.0
NEMA Plug	8 ft. 5-15P	8 ft. 5-15P	8 ft. 5-15P	8 ft. 5-15P
Shipping Dimensions W x D x H	53.5" x 31.25" x 39"	69.5" x 33" x 39"	84" x 33" x 39"	101" x 33" x 39"
Shipping Weight	235 lbs.	275 lbs.	315 lbs.	355 lbs.
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	\$6,730 *\$8,050	\$7,470 *\$8,740	\$9,430 *\$10,780	\$9,960 *\$11,430

\*(-S) Stainless Steel Exterior option available - Made to order.  
 † Does not include 1" rear cabinet bumper or bottle cap catcher depth  
 See Refrigeration Accessories on pages 84-89 for options and prices



# DIRECT DRAW REFRIGERATORS



**DD24**



**DD59**



**DD69**



**DD80**



**DD95**

- Stainless steel interior
- Heavy duty 18-gauge stainless steel top
- Polished stainless-steel insulated towers with plated brass faucet
- Black vinyl coated or stainless steel exterior front, sides, and rear
- Stainless steel threshold protects door frame from damage when loading and unloading
- Keg cushions standard to protect floor and increase air flow around kegs

Model Number	DD24(-S*)	DD59(-S*)	DD69(-S*)	DD80(-S*)	DD95(-S*)
Cabinet Dimensions W x D x H	24.88" x 30" x 39.38"	59.5" x 29" x 36.88"	69.5" x 29" x 36.88"	80" x 29" x 36.88"	95.5" x 29" x 36.88"
Capacity (AHAM) cu ft	7.46 ft <sup>3</sup>	18.45 ft <sup>3</sup>	21.8 ft <sup>3</sup>	26.79 ft <sup>3</sup>	32.53 ft <sup>3</sup>
Door(s)	1	2	2	3	3
Tower(s)	1	2	2	2	2
Tap(s)	1	3	3	4	4
Capacity 1/2 Barrels	1	2	3	4	5
HP	1/6	1/3	1/3	1/3	1/3
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	1.5	2.5	2.5	2.5	2.5
NEMA Plug	5-15P	5-15P	5-15P	5-15P	5-15P
Shipping Dimensions W x D x H	34.5" x 29" x 45.5"	62.5" x 31.25" x 42.5"	72.5" x 31.25" x 42.5"	82.5" x 31.25" x 42.5"	98.5" x 31.25" x 42.5"
Shipping Weight	175 lbs.	345 lbs.	360 lbs.	385 lbs.	430 lbs.
Refrigerant	R290	R290	R290	R290	R290
List F. O. B. Griffin	<b>\$5,950</b> *\$7,350	<b>\$9,930</b> *\$11,420	<b>\$10,630</b> *\$13,390	<b>\$11,640</b> *\$13,750	<b>\$11,820</b> *\$14,360

\*(-S) Stainless Steel Exterior option available - Made to order.  
See Refrigeration Accessories on pages 84-89 for options and prices

# ECONOMY REFRIGERATORS



**ER1A-FS**  
ENERGY STAR  
Qualified



**ER2A-FS**  
ENERGY STAR  
Qualified

- Stainless steel interior floor with aluminum sides, rear, and top
- Stainless steel exterior door(s) come standard with lock(s)
- Energy efficient interior LED light
- Time initiated automatic defrost
- Energy efficient heated condensate removal
- Heavy duty grey epoxy coated shelves are adjustable in 1/2" increments; 3 per section. 105 lbs. capacity

Model Number	ER1A-FS	ER2A-FS
Interior Storage Capacity (AHAM)	17.8 ft <sup>3</sup>	38.61 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	27" x 29.63" x 81.63"	54.38" x 29.63" x 81.63"
Depth with Doors Open at 90°	55.38"	55.38"
Interior Door Opening Width	22.25"	22.9"
Interior Door Opening Height	52.1"	52.1"
Adjustable Shelves	3	6
Shelf Dimensions (W x D)	21.5" x 23.1"	24.3" x 21.7"
Crated Shipping Weight	279 lbs.	523 lbs.
Crated Shipping Dimensions (L x W x H)	31.5" x 28.75" x 84"	58" x 31.5" x 84"
Voltage	115V/60/1	115V/60/1
Amperage (AMP)	2	4.3
HACR Breaker (AMP)	15	15
Energy Consumption (kWh / day) ASHRAE	1.06	2.1
Heat Rejection (BTU / hr)	1960(1/5HP)	4291(1/3HP)
Voltage Range	103 - 127	103 - 127
Ambient Temp. Range	45° to 100°F	45° to 100°F
Control Set Point Range	33° to 39°F	33° to 39°F
Refrigerant	R290	R290
List F.O.B. Griffin	<b>\$5,100</b>	<b>\$7,920</b>

See Refrigeration Accessories on page 89 for options and prices



**EF1A-FS**



**EF2A-FS**

- Stainless steel interior floor with aluminum sides, rear, and top
- Stainless steel exterior door(s) come standard with lock(s)
- Energy efficient interior LED light

- Time initiated automatic defrost
- Energy efficient heated condensate removal
- Heavy duty grey epoxy coated shelves are adjustable in 1/2" increments; 3 per section. 105 lbs. capacity

Model Number	EF1A-FS	EF2A-FS
Interior Storage Capacity (AHAM)	17.74 ft <sup>3</sup>	38.54 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	27" x 29.63" x 81.63"	54.38" x 29.63" x 81.63"
Depth with Doors Open at 90°	55.38"	55.38"
Interior Door Opening Width	22.25"	22.9"
Interior Door Opening Height	52.1"	52.1"
Adjustable Shelves	3	6
Shelf Dimensions (W x D)	21.5" x 23.1"	24.3" x 21.7"
Crated Shipping Weight	279 lbs.	523 lbs.
Crated Shipping Dimensions (L x W x H)	31.5" x 28.75" x 84"	58" x 31.5" x 84"
Voltage	115V/60/1	115V/60/1
Amperage (AMP)	3.2	4.7
HACR Breaker (AMP)	15	15
Energy Consumption (kWh / day) ASHRAE	4.62	8.8
Heat Rejection (BTU / hr)	1399(1/3HP)	2074(1/2HP)
Voltage Range	103 - 127	103 - 127
Ambient Temp. Range	45° to 100°F	45° to 100°F
Control Set Point Range	-5° to 5°F	-5° to 5°F
Refrigerant	R290	R290
List F.O.B. Griffin	<b>\$6,150</b>	<b>\$9,230</b>

See Refrigeration Accessories on page 89 for options and prices

# UNDERCOUNTER ECONOMY REFRIGERATORS & FREEZERS



**EUR27A**  
ENERGY STAR  
Qualified



**EUR48A**  
ENERGY STAR  
Qualified



**EUF27A**  
ENERGY STAR  
Qualified



**EUF48A**  
ENERGY STAR  
Qualified

- Stainless steel interior floor with aluminum sides, rear, and top
- Stainless steel exterior door(s) come standard with lock(s)
- Energy efficient interior LED light
- Time initiated automatic defrost
- Energy efficient heated condensate removal
- Heavy duty grey epoxy coated shelves are adjustable in 1/2" increments; 3 per section. 105 lbs. capacity


Model Number	EUR27A	EUR48A	EUF27A	EUF48A
Interior Storage Capacity (AHAM)	6.33 ft <sup>3</sup>	12.09 ft <sup>3</sup>	6.33 ft <sup>3</sup>	12.09 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	27" x 30" x 33.75"	47.75" x 30" x 33.75"	27" x 30" x 33.75"	47.75" x 30" x 33.75"
Depth with Doors Open at 90°	54.5"	51.5"	55.75"	52.75"
Interior Door Opening Width	22.6"	19.5"	22.6"	19.5"
Interior Door Opening Height	22.75"	22.75"	22.75"	22.75"
Adjustable Shelves	1	2	1	2
Shelf Dimensions (W x D)	22" x 16"	21.25" x 16"	22" x 16"	21.25" x 16"
Crated Shipping Weight	200 lbs.	290 lbs.	200 lbs.	290 lbs.
Crated Shipping Dimensions (L x W x H)	33" x 29" x 37"	52" x 33" x 37"	33" x 29" x 37"	52" x 33" x 37"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	1.5	1.8	1.2	1.7
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	0.95	1.21	1.92	3.44
Heat Rejection (BTU / hr)	1289(1/6HP)	1709(1/6HP)	993(1/6HP)	1468(1/6HP)
Voltage Range	115-127	115-127	115-127	115-127
Ambient Temp. Range	45° to 100°F	45° to 100°F	45° to 100°F	45° to 100°F
Control Set Point Range	33° to 39°F	33° to 39°F	33° to 39°F	33° to 39°F
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	<b>\$4,060</b>	<b>\$5,660</b>	<b>\$4,550</b>	<b>\$6,110</b>

See Refrigeration Accessories on page 89 for options and prices







# REFRIGERATION ACCESSORIES



**CASTERS**



**FOOT PEDAL  
DOOR OPENER**



**SHELVES**



**TRAY / PAN SLIDES**

## CASTERS & LEGS

Model Number	Description	List F.O.B. Griffin
HS-3546	4" Casters - Set of four, two with brakes (1/2 Section Uprights)	\$590
HS-3547	4" Casters - Set of six, three with brakes (3 Section Uprights)	\$900
HS-5035	4" Casters - Set of four, two with brakes (1, 2 & 3 Section Horizontal Units)	\$150
HS-5036	6" Casters - Set of four, two with brakes (1, 2 & 3 Section Horizontal Units)	\$210
HS-5037	2 1/4" Casters - Set of four, two with brakes (1 & 2 Section Undercounters) for ADA Compliant dimensions	\$160
HS-5320	3 3/8" Casters - Set of four, two with brakes (for pizza prep tables) for ADA Compliant dimensions	\$150
HS-5321	3 3/8" Casters - Set of six, three with brakes (for pizza prep tables) for ADA Compliant dimensions	\$220
LP-6 LEG	6" Stainless Steel Legs, set of 4 (1, 2 & 3 Section Upright Models [3 section needs 2 sets])	\$310
LP-6P LEG	6" Painted Leg (grey), set of 4 (1, 2 & 3 Section Upright Models [3 section needs 2 sets])	\$290

## FOOT PEDALS

Model Number	Description	For Use With Steelheart Models	List F.O.B. Griffin
HS-5378	One Door Foot Pedal	Left Hinge upright, solid door Steelheart models	\$410
HS-5379	One Door Foot Pedal	Right Hinge upright, solid door Steelheart models	\$410
HS-5380	Two Door Foot Pedal	n/a	\$720
HS-5555	Left-Hinged Door Foot Pedal (right foot pedal)	Solid door undercounter, worktop and sandwich prep table models	\$410
HS-5556	Right-Hinged Door Foot Pedal (left foot pedal)	Solid door undercounter, worktop and sandwich prep table models	\$410

## DOOR REVERSAL KIT

Model Number	Description	List F.O.B. Griffin
HS-5258	Door Reversal Kit - Undercounter Glass Door Models (Right Hinge to Left Hinge)	\$280
HS-5259	Door Reversal Kit - Undercounter Glass Door Models (Left Hinge to Right Hinge)	\$280

## SHELVES

Model Number	Description	For Use With Steelheart Models	List F.O.B. Griffin
HS-5052	Industrial Strength Epoxy Coated Shelf, Includes 4 Pilaster Clips	1,2,3 Section Uprights	\$280
HS-5053	Industrial Strength Epoxy Coated Shelf, 3 each, Includes 12 Pilaster Clips	1,2,3 Section Uprights	\$410
HS-5054	Industrial Strength Stainless Steel Shelf, Includes 4 Pilaster Clips	1,2,3 Section Uprights	\$430
HS-3504	Industrial Strength Stainless Steel Center Shelf	2 Section Uprights	\$400
HS-3505	Industrial Strength Stainless Steel Center Shelf, 3 each	2 Section Uprights	\$630



**SHELVES...CONTINUED**

<b>HS-3509</b>	Industrial Strength Epoxy Coated Shelf Center Shelf	2 Section Uprights	<b>\$310</b>
<b>HS-3510</b>	Industrial Strength Epoxy Coated Shelf Center Shelf, 3 each	2 Section Uprights	<b>\$480</b>
<b>HS-3550</b>	Pass-Thru Epoxy Shelf, 3 pack	1 & 2 Section Models	<b>\$400</b>
<b>HS-3551</b>	Pass-Thru Epoxy Shelf, 1 pack	1 & 2 Section Models	<b>\$340</b>
<b>HS-3552</b>	Pass-Thru Stainless Steel Shelf, 3 Pack	1 & 2 Section Models	<b>\$1,200</b>
<b>HS-3553</b>	Pass-Thru Stainless Steel Shelf, 1 Pack	1 & 2 Section Models	<b>\$580</b>
<b>HS-5388</b>	Industrial Strength Epoxy Coated Shelf Center Shelf, 1 each	3 Section Uprights	<b>\$310</b>
<b>HS-5389</b>	Industrial Strength Epoxy Coated Shelf Center Shelf, 3 each	3 Section Uprights	<b>\$730</b>
<b>HS-5057</b>	Tempered Glass Shelves, 3 each	For use with HR24C-G	<b>\$310</b>
<b>HS-5058</b>	Epoxy Coated Wire Shelf, Includes 4 Pilaster Clips	All 27" and 72" Undercounters, Worktops and Prep Tables	<b>\$130</b>
<b>HS-5235</b>	Epoxy Coated Wire Shelf, Includes 4 Pilaster Clips	All 36" Undercounters, Worktops and Prep Tables	<b>\$220</b>
<b>HS-5059</b>	Epoxy Coated Wire Shelf, Includes 4 Pilaster Clips	All 48" Undercounters, Worktops and Prep Tables	<b>\$130</b>
<b>HS-5108</b>	Epoxy Coated Wire Shelf, Includes 4 Pilaster Clips	All 60" Undercounters, Worktops and Prep Tables	<b>\$160</b>
<b>HS-5116</b>	Stainless Steel Shelf, Includes 4 Pilaster Clips	All 27" and 72" Undercounters, Worktops and Prep Tables	<b>\$340</b>
<b>HS-5117</b>	Stainless Steel Shelf, Includes 4 Pilaster Clips	All 48" Undercounters, Worktops and Prep Tables	<b>\$400</b>
<b>HS-5118</b>	Stainless Steel Shelf, Includes 4 Pilaster Clips	All 60" Undercounters, Worktops and Prep Tables	<b>\$470</b>
<b>HS-5151</b>	Epoxy Coated Wire Shelf, Includes 4 Pilaster Clips	PR67/93A	<b>\$280</b>
<b>HS-5152</b>	Epoxy Coated Wire Shelf, Includes 4 Pilaster Clips	PR46A	<b>\$280</b>
<b>HS-5153</b>	Stainless Steel Shelf, Includes 4 Pilaster Clips	PR67/93A	<b>\$480</b>
<b>HS-5154</b>	Stainless Steel Shelf, Includes 4 Pilaster Clips	PR46A	<b>\$490</b>
<b>HS-5161</b>	Lower Epoxy Coated Shelf, 4 Pilaster Clips	All 27" Undercounters, Worktops, and Prep Tables	<b>\$180</b>
<b>HS-5169</b>	Lower Stainless Steel Shelf, 4 Pilaster Clips	All 27" Undercounters, Worktops, and Prep Tables	<b>\$340</b>
<b>HS-5581</b>	Epoxy shelf, including 4 pilaster clips	Freezer Glass Door Merchandiser Accessory Shelf w/clips	<b>\$190</b>
<b>HS-5592</b>	Standard wood shelf	HR-15	<b>\$110</b>
<b>HS-5593</b>	Small wood shelf	HR-24	<b>\$130</b>
<b>HS-5594</b>	Large wood shelf	HR-24	<b>\$150</b>
<b>HS-5595</b>	Complete wine shelf set for HR-15 (set of 4 wood shelves with 4 slidina rails)	HR-15	<b>\$1,050</b>
<b>HS-5596</b>	Complete wine shelf set for HR-24 (set of 5 wood)	HR-24	<b>\$1,130</b>

**OVERSHELVES**

<b>Model Number</b>	<b>Description</b>	<b>For Use With</b>	<b>List F.O.B. Griffin</b>
<b>HS-5172†</b>	Single Overshelf for 27" Cabinet	27" Undercounters, Worktops, Sandwich Top & Mega Top	<b>\$930</b>
<b>HS-5237†</b>	Single Overshelf for 36" Cabinet	36" Undercounters, Worktops, Sandwich Top & Mega Top	<b>\$1,020</b>
<b>HS-5173†</b>	Single Overshelf for 48" Cabinet	48" Undercounters, Worktops, Sandwich Top & Mega Top	<b>\$1,060</b>
<b>HS-5174†</b>	Single Overshelf for 60" Cabinet	60" Undercounters, Worktops, Sandwich Top & Mega Top	<b>\$1,300</b>
<b>HS-5175†</b>	Single Overshelf for 72" Cabinet	72" Undercounters, Worktops, Sandwich Top & Mega Top	<b>\$1,550</b>
<b>HS-5163†</b>	Double Overshelf for 27" Cabinet	27" Undercounters, Worktops, Sandwich Top & Mega Top	<b>\$1,140</b>
<b>HS-5236†</b>	Double Overshelf for 36" Cabinet	36" Undercounters, Worktops, Sandwich Top & Mega Top	<b>\$1,390</b>
<b>HS-5164†</b>	Double Overshelf for 48" Cabinet	48" Undercounters, Worktops, Sandwich Top & Mega Top	<b>\$1,660</b>
<b>HS-5165†</b>	Double Overshelf for 60" Cabinet	60" Undercounters, Worktops, Sandwich Top & Mega Top	<b>\$2,350</b>
<b>HS-5166†</b>	Double Overshelf for 72" Cabinet	72" Undercounters, Worktops, Sandwich Top & Mega Top	<b>\$3,040</b>

**OVERSHELVES - CONTINUED**

<b>HS-5229**</b>	Single Overshelf for 46" / 93" Cabinet	46" / 93" Pizza Prep Tables 93" cabinets can accommodate (2) HS-5229 Single Overshelves	<b>\$1,150</b>
<b>HS-5231†</b>	Single Overshelf for 67" Cabinet	67" Pizza Prep Tables	<b>\$1,390</b>
<b>HS-5228**</b>	Double Overshelf for 46" / 93" Cabinet	46" / 93" Pizza Prep Tables 93" cabinets can accommodate (2) HS-5228 Double Overshelves	<b>\$1,760</b>
<b>HS-5230‡</b>	Double Overshelf for 67" Cabinet	67" Pizza Prep Tables	<b>\$2,300</b>

†Compatible with models manufactured since March 2016. (Serial # FXXXXXC and after)

‡Compatible with models manufactured since January 2017. (Serial # GXXXXXA and after)

\* 93" cabinets can accommodate (2) HS-5229 Single Overshelves or (2) HS-5228 Double Overshelves.

**TRAY / PAN SLIDES**

(16) Sets on 3" Centers per section is the recommended maximum capacity for Uprights. Units can hold as many as (24) sets on 2" Centers per section.

Model Number	Description	List F.O.B. Griffin
<b>HS-3557</b>	Stainless Steel Bottom Support Universal Pan Slides (1 Set), Includes 4 Pilaster Clips	<b>\$270</b>
<b>HS-3558</b>	Stainless Steel Bottom Support Universal Pan Slides (4 Sets), Includes 16 Pilaster Clips	<b>\$850</b>
<b>HS-5092</b>	Stainless Steel Bottom Support Wire Tray Slides (1 Set) for 18x26 Baker Pan Only, Includes 4 Pilaster Clips	<b>\$200</b>
<b>HS-5093</b>	Stainless Steel Bottom Support Wire Tray Slides (4 Sets) for 18x26 Baker Pan Only, Includes 16 Pilaster Clips	<b>\$620</b>

**PIZZ PREP TABLES - PAN SLIDES**

Model Number	Description	List F.O.B. Griffin
<b>HS-5514</b>	Removable Tray Pan Rack For Pizza Preps- Accommodates (6) 18" x 26" Sheet Pans With 3" Spacing	<b>\$660</b>

**FLAT LIFT OFF COVERS**

Model Number	Description	For Use With	List F.O.B. Griffin
<b>HS-5070</b>	Flat Lift-Off Stainless Steel Cover - 12 pan Mega Top opening	SR27B-12M, SR48A-12M, SR60A-12M *SR60A-24M, *SR72A-24M, SR27B-12MD *SR60A-24MD4 (*2 of each cover required per model)	<b>\$410</b>
<b>HS-5279</b>	Flat Lift-Off Stainless Steel Cover - 15 pan Mega Top opening	SR36B-15M	<b>\$410</b>
<b>HS-5071</b>	Flat Lift-Off Stainless Steel Cover - 18 pan Mega Top opening	SR48A-18M, SR60A-18M, SR72A-18M SR48A-18MD4	<b>\$410</b>
<b>HS-5072</b>	Flat Lift-Off Stainless Steel Cover - SR27A-8	SR27B-8, SR27B-8D	<b>\$410</b>
<b>HS-5073</b>	Flat Lift-Off Stainless Steel Cover - SR48A-8	SR48A-8, SR60A-8	<b>\$410</b>
<b>HS-5278</b>	Flat Lift-Off Stainless Steel Cover - 10 pan Sandwich Top opening	SR36B-10	<b>\$410</b>
<b>HS-5074</b>	Flat Lift-Off Stainless Steel Cover - 12 pan Sandwich Top opening	SR48A-12, SR48A-12MD4, SR60A-12, SR72A-12	<b>\$410</b>
<b>HS-5106</b>	Flat Lift-Off Stainless Steel Cover - SR60A-16, SR72A-16	SR60A-16, SR72A-16	<b>\$540</b>
<b>HS-5107</b>	Flat Lift-Off Stainless Steel Cover - SR72A-18	SR72A-18	<b>\$540</b>
<b>HS-5070 + HS-5071</b>	Flat Lift-Off Stainless Steel Cover - 12 pan Mega Top opening Flat Lift-Off Stainless Steel Cover - 18 pan Mega Top opening	SR72A-30M, SR72A-30M6 (1 of each cover required per model)	<b>\$410 (Each Cover)</b>

**COMPOSITE CUTTING BOARDS**

Model Number	Description	For Use With	List F.O.B. Griffin
<b>HS-5265</b>	10" x 27" x 1/2" Composite Cutting Board	27" Sandwich Top & Mega Top	<b>\$400</b>
<b>HS-5266</b>	10" x 36" x 1/2" Composite Cutting Board	36" Sandwich Top & Mega Top	<b>\$540</b>
<b>HS-5267</b>	10" x 48" x 1/2" Composite Cutting Board	48" Sandwich Top & Mega Top	<b>\$720</b>
<b>HS-5268</b>	10" x 60" x 1/2" Composite Cutting Board	60" Sandwich Top & Mega Top	<b>\$880</b>
<b>HS-5269</b>	10" x 72" x 1/2" Composite Cutting Board	72" Sandwich Top & Mega Top	<b>\$1,060</b>
<b>HS-5270</b>	19" x 46" x 1/2" Composite Cutting Board	46" Pizza Prep Tables	<b>\$1,300</b>
<b>HS-5271</b>	19" x 67" x 1/2" Composite Cutting Board	67" Pizza Prep Table	<b>\$1,960</b>
<b>HS-5272</b>	19" x 93" x 1/2" Composite Cutting Board	93" Pizza Prep Table	<b>\$2,740</b>

**GLASS DOOR MERCHANDISER ACCESSORIES**

Model Number	Description	For Use With	List F.O.B. Griffin
HS-5446	Organizer Shelf With Tracks, Includes 4 Pilaster Clips	RM-10-HC	\$220
HS-5291	Organizer Shelf With Tracks, Includes 4 Pilaster Clips	RM-26-HC	\$250
HS-5293	Organizer Shelf With Tracks, Includes 4 Pilaster Clips	RM-45-SD-HC	\$250
HS-5295	Organizer Shelf With Tracks, Includes 4 Pilaster Clips	RM-49-HC	\$250
HS-5290	Price Tag Holder	RM-10-HC	\$20
HS-5292	Price Tag Holder	RM-26-HC	\$20
HS-5294	Price Tag Holder	RM-45-SD-HC	\$20
HS-5296	Price Tag Holder	RM-49-HC	\$20
HS-5447	Epoxy Shelf, Includes 4 Pilaster Clips	RM-10-HC	\$150
HS-5317	Epoxy Shelf, Includes 4 Pilaster Clips	RM-26-HC	\$210
HS-5318	Epoxy Shelf, Includes 4 Pilaster Clips	RM-45-SD-HC	\$210
HS-5319	Epoxy Shelf, Includes 4 Pilaster Clips	RM-49-HC	\$210
HS-5343	Epoxy Shelf, Includes 4 Pilaster Clips	RM-7-HC	\$90
HS-5344	Epoxy Floor Shelf	RM-7-HC	\$70
HS-5288	4" Casters-Set Of Four, Two With Brakes	RM-10-HC, RM-26-HC, RM-45-SD-HC, RM-49-HC	\$160
HS-5460	Flat Epoxy coated shelf, RM-65-HC Middle Section	RM-65-HC	\$210
HS-5461	Flat Epoxy coated shelf, RM-65-HC Right & Left Section	RM-65-HC	\$210
HS-5465	Organizer Shelf with Tracks, Middle Section	RM-65-HC	\$250
HS-5466	Organizer Shelf with Tracks, Right & Left Section	RM-65-HC	\$250

**BACK BAR ACCESSORIES**

Model Number	Description	For Use With	List F.O.B. Griffin
HS-5410	Complete Door Assembly-Solid, Right Hinge	All Back Bar and Direct Draw Models except DD24	\$390
HS-5411	Complete Door Assembly-Solid, Left Hinge	All Back Bar and Direct Draw Models except DD24, BB80, BB80-G, DD80	\$390
HS-5412	Complete Door Left Section Assembly-Solid, Left Hinge 80"	BB80, BB80-G, DD80	\$390
HS-5413	Complete Door Assembly-Glass, Right Hinge	All Back Bar and Direct Draw Models except DD24	\$780
HS-5414	Complete Door Assembly-Glass, Left Hinge	BB59, BB69, BB95, BB59-G, BB69-G, DD59, DD69, DD95	\$780
HS-5415	Complete Door Left Section Assembly-Glass, Left Hinge 80"	BB80, BB80-G, DD80	\$780
HS-5417	Flat Shelf, 59" & Right 80" Cabinets, 21.25" x 21.4", Includes 4 SS pilaster clips	BB59, BB59-G, DD59, (Right Section) BB80, BB80-G, DD80	\$150
HS-5418	Flat Shelf, 69" & 95" Cabinets, 26" x 21.4", Includes 4 SS pilaster clips	BB69, BB69-G, BB95, DD69, DD95, BB95-G	\$150
HS-5419	Flat Shelf Center, 80" Cabinets, 23.1" x 21.4", Includes 4 SS pilaster clips	(Center) BB80, BB80-G, DD80	\$150
HS-5420	Flat Shelf Left, 80" Cabinets, 18" x 21.4", Includes 4 SS pilaster clips	(Left Section) BB80, BB80-G, DD80	\$150
HS-5421	Set of 4 Pilasters 20.2"	All Back Bar and Direct Draw Models	\$150
HS-5515	Bottle Dividers for Back Bar Shelves, 6 Pack with 12 clips	All Back Bar	\$190

**ECONOMY SERIES**

Model Number	Description	For Use With	List F.O.B. Griffin
HS-5511	Flat Shelf Economy Series 1 Section Uprights with clips	Refrigerator, Freezer	\$340
HS-5512	Flat Shelf Economy Series 2 Section Uprights with clips	Refrigerator, Freezer	\$350

**MISCELLANEOUS ACCESSORIES**

Model Number	Description	For Use With	List F.O.B. Griffin
HS-4007	Drawer Assembly Divider Bar (Accommodates 1/2, 1/3 and 1/6 Size Pans)	Undercounters, Worktops, Prep Tables, Equipment Stands	\$60
HS-4009	12" Rail Divider Bar	Prep Tables	\$40
HS-5069	Sandwich Top Rail Adapter Bar - 12.6" x 1.0" (front to back)	Sandwich Top & Mega Top Prep Tables	\$40
HS-5280	Full Size Pan Adapter Bar for UR27B-8 Rail	Sandwich Top Prep Tables	\$60
HS-5281	Full Size Pan Adapter Bar for SR36B-10 Rail	Sandwich Top Prep Tables	\$60
HS-5476	Black kickplate for HR15A, HR15A-G	HR15A, HR15A-G	\$40
HS-5075	Stainless Back - 27" Horizontal Models (factory installed only)	Refrigerator & Prep	\$590
HS-5171	Stainless Back - 27" Horizontal Models (factory installed only)	Freezer	\$600
HS-5277	Stainless Back - 36" Horizontal Models (factory installed only)	Refrigerator, Freezer	\$670
HS-5076	Stainless Back - 48" Horizontal Models (factory installed only)	Refrigerator	\$750
HS-5527	Stainless Back - 48" Horizontal Models (factory installed only)	Freezer & Prep	\$750
HS-5085	Stainless Back - 60" Horizontal Models (factory installed only)	Refrigerator	\$850
HS-5170	Stainless Back - 60" Horizontal Models (factory installed only)	Freezer & Prep	\$850
HS-5086	Stainless Back - 72" Horizontal Models (factory installed only)	Prep	\$1,000
HS-5528	Stainless Back - 72" Horizontal Models (factory installed only)	Refrigerator	\$1,000
HS-5112	Stacking Kit - UR27B & UF27B	Undercounters	\$620
HS-5184	All Mega Top divider front to back	Mega Top Prep Tables	\$60
HS-5185	All Mega Top & Sandwich Prep 27-8 divider side to side (outer)	Sandwich Top & Mega Top Prep Tables	\$40
HS-5186	Mega Top 18M & 30M divider side to side (center)	Mega Top Prep Tables	\$40
HS-5187	Sandwich Prep 27-8 divider front to back	Sandwich Top Prep Tables	\$40
HS-5188	Sandwich Prep 48-8 and 12, 16, 18 pan openings divider front to back	Sandwich Top Prep Tables	\$40
HS-5189	Sandwich Prep 48-8 and 12, 16, 18 pan openings side to side (outer)	Sandwich Top Prep Tables	\$40
HS-5190	Sandwich Prep 12 & 16 pan openings side to side (center)	Sandwich Top Prep Tables	\$40
HS-5191	Sandwich Prep 18 pan openings side to side (outer)	Sandwich Top Prep Tables	\$60
HS-5192	Sandwich Prep 18 pan openings side to side (center)	Sandwich Top Prep Tables	\$60
HS-5453	Heated Condensate Pan Kit	≥46" Undercounter, Worktop and Prep Tables	\$600
HS-5462	Heated Condensate Pan	Steelheart Uprights	\$630
HS-5526	Stainless Steel Rear Panel for 1 Section Upright, (factory installed only)	Steelheart Uprights	\$1,210
HS-5525	Stainless Steel Rear Panel for 2 Section Upright, (factory installed only)	Steelheart Uprights	\$2,330
HS-5496	Stainless Steel Rear Panel for DT1A (factory installed only)	Steelheart Uprights	\$1,210
HS-5497	Stainless Steel Rear Panel for DT2A (factory installed only)	Steelheart Uprights	\$2,330
HS-5587	Brazed Line Set 25 Ft for URC-5FZ	URC-5FZ	\$560
HS-5588	Brazed Line Set 35 Ft for URC-5FZ	URC-5FZ	\$720
HS-5600	Booster Antenna	Remote Monitoring System	\$110
HS-5607	Optional Bin Scoop Holder	All SF Bins	\$140
HS-5590	Price tag holder for RM-65-HC	Price tag holder for RM-65-HC	\$20
H9320-54	Single - Medical System	Single Manifold System - Medical	\$570
HS-5585	14" cutting boards Brackets	14" Cutting Boards	\$160
HS-5601	Dual Rear Cutting board	60" MegaTop models	\$510
HS-5202	Dual Rear Cutting board	60" Sandwich and MegaTop Models	\$350



# OUR COMMITMENT TO OUR CUSTOMERS

Our commitment to quality continues after the sale.  
To ensure your HOSHIZAKI equipment operates at its optimum, we provide the following:

## Customer Service

**800-438-6087**

For assistance with orders or finding a local distributor

- ▶ Established Field Service Network - [hoshizakiamerica.com/locate-service-rep](http://hoshizakiamerica.com/locate-service-rep)
- ▶ QR Code on the back of each unit for easy access to warranty and service information.
- ▶ Toll-Free Technical Support 24 hours/day (including holidays)
- ▶ Basic and Advanced training
- ▶ User-Friendly Website
  - Product Information
  - FAQ
  - Library of literature
  - Videos
  - Manuals
  - Tech tips/guides
  - Warranty information



**Toll-Free Technical  
Support Line 24 hours**

7 days a week, (including holidays)

**800-233-1940**



**HOSHIZAKI. BEYOND STRONG.**

**HOSHIZAKI AMERICA, INC.**

618 Hwy. 74, South, Peachtree City, GA 30269

TEL 800-438-6087 | FAX 800-345-1325

[hoshizakiamerica.com](http://hoshizakiamerica.com)

Item #40067 | 07-14-22

